# **BL4-S-HRS1260M**

4" MINIATURE DEDICATED MR16 LED "NOISE-FREE" SHALLOW NON-IC HOUSING

INPUT VOLT.	INPUT FREQ.	WATT	CRI	COLOR TEMP.	LUMENS
120	50/60Hz	7W	80.0	2700°K/3000°K	390



### **DESCRIPTION**

Developed especially for LED MR16 lamp applications. Crafted for sustainability and environmentally sensitive applications. Five times the life expectancy of halogen MR16 with 80% energy savings. Small aperture LED MR16 dedicated, thermally protected, New Construction Non insulated ceilings or where insulation can be kept 3" from the housing, furnished with preinstalled adjustable bar hangers.

### **SPECIFICATION**

HOUSING - High temperature painted 22 gauge deep drawn single piece housing. Adjusts vertically in plaster frame to accommodate 1/2" to 1-3/8" ceiling. Accommodates lamps up to 35W depending

**DRIVER** - Class II dimming electronic driver.

BAR HANGERS - Preinstalled bar hangers allow housing to be positioned and locked at any point within a 24" joist span and can be shortened for 12" joists. They contain a double-headed real nail for secure attachment into the joist. Bar hanger nails are installed on a 20° downward angle for better contact. and the 90° pivoting mounting plate makes installation fast and accurate. Bar hangers can fit onto T-Bar spline with additional slots and holes for special mounting methods if necessary.

JUNCTION BOX - through-branch circuit wiring and has four 1/2" KOs, one 3/4" KO and four Romex knockouts with true pry-out slots and strain

### OPTION

1. AIR-

SHUT- Gasket to prevent air flow from heated or air

conditioned spaces.

. Meets all national air flow requirements.








LUMENS





ТҮРЕ	GE MR16 LED LAMP INCLUDED	VOLTAGE	OPTION
BL4-S-HRS1260M	☐ LED7DMR16/830/15 ☐ LED7DMR16/827/15 ☐ LED7DMR16/830/25 ☐ LED7DMR16/827/25 ☐ LED7DMR16/830/35 ☐ LED7DMR16/827/35 ☐ LED7DMR16/NFL/TP	120	AT Air-Shut

# BL4R-S-HRS1260M

4" MINIATURE DEDICATED MR16 LED "NOISE-FREE" SHALLOW NON-IC REMODEL HOUSING



(3-5/8" IN HEIGHT)

# DESCRIPTION

Developed especially for LED MR16 lamp applications. Crafted for sustainability and environmentally sensitive applications. Five times the life expectancy of halogen MR16 with 80% energy savings. Small aperture LED MR16 dedicated, thermally protected, For Remodel Construction with three remodel clips are easily retractable for fixture removal if necessary. Non insulated ceilings or where insulation can be kept 3" from the housing.

## **SPECIFICATION**

HOUSING - High temperature painted 22 gauge deep drawn single piece housing.

**DRIVER** - Class II dimming electronic driver.

JUNCTION BOX - through-branch circuit wiring and has eight 1/2" KOs and four Romex knockouts with strain relief.

**INSTALLATION** - Three preinstalled spring clips which secure the housing firmly into ceiling to accommodate different ceiling thickness from 1/2" to 1-3/8".

### INPUT VOLT. INPUT FREO. WATT COLOR TEMP. 50/60Hz 7W 80.0 2700°K/3000°K 390 120

CRI


### OPTION


- 1. AIR-SHUT-
- · Gasket to prevent air flow from heated or air conditioned spaces.
- . Meets all national air flow requirements.











ТҮРЕ	GE MR16 LED LAMP INCLUDED	VOLTAGE	OPTION
BL4R-S-HRS1260M	☐ LED7DMR16/830/15 ☐ LED7DMR16/827/15 ☐ LED7DMR16/830/25 ☐ LED7DMR16/827/25 ☐ LED7DMR16/827/35 ☐ LED7DMR16/NFL/TP	120	AT Air-Shut

# 4-inch Recessed Diamond Collection

The new crystal collection from Elite Lighting is more than just a trim, it's a form of art. Brilliant crystal jewels are aligned perfectly to provide a unique and sophisticated appearance to any space. Enhance the appearance of hallways, lobbies or waiting areas into an elegant appealing space. Different size crystals, along with a variety of colors make the Crystal Collection a beautiful masterpiece.

B1451CH Ruby I



### DESCRIPTION:

- All die-cast construction with enhanced clear crystals
- · Internal gasket prevents light leakage
- · Chrome trim finish standard on all trims

HOUSING COMPATIBILITY GUIDE:













### DESCRIPTION:

- All die-cast construction with enhanced clear crystals
- Internal gasket prevents light leakage
- · Chrome trim finish standard on all trims

HOUSING COMPATIBILITY GUIDE:











### B1454CH Sapphire I



### DESCRIPTION:

- · All die-cast construction with enhanced clear crystals
- · Internal gasket prevents light leakage
- · Chrome trim finish standard on all trims

HOUSING COMPATIBILITY GUIDE:





B1457CH

Emerald II











### DESCRIPTION:

- · All die-cast construction with enhanced clear crystals
- Internal gasket prevents light leakage
- · Chrome trim finish standard on all trims

HOUSING COMPATIBILITY GUIDE:











# DESCRIPTION:

B1456CH

Emerald I

- · All die-cast construction with enhanced color crystals
- Internal gasket prevents light leakage
- · Chrome trim finish standard on all trims

HOUSING COMPATIBILITY GUIDE:



B1459CH

DESCRIPTION:

Topaz II





DESCRIPTION:

- · All die-cast construction with enhanced amber crystals
- Internal gasket prevents light leakage
- · Chrome trim finish standard on all trims HOUSING COMPATIBILITY GUIDE:













### DESCRIPTION:

- All die-cast construction with enhanced color crystals
- · Internal gasket prevents light leakage
- · Chrome trim finish standard on all trims

HOUSING COMPATIBILITY GUIDE:













- · All die-cast construction with enhanced color crystals
- · Internal gasket prevents light leakage
- · Chrome trim finish standard on all trims

HOUSING COMPATIBILITY GUIDE:







DESCRIPTION:

B1460CH

Onyx

- All die-cast construction with frosted glass
- Internal gasket prevents light leakage
- Chrome trim finish standard on all trims

HOUSING COMPATIBILITY GUIDE:









FINISH TRIM	TRIM OUTSIDE DIA
CH - Chrome	4-7/8"

FINISH TRIM	TRIM OUTSIDE DIA.	GUIDE	HOUSING COMPATIBILITY	MAX. LAMP WATTAGE
CH - Chrome	4-7/8"		BL4IC, BL4, BL4R	50W 12V MR16
General	me 4-7/8" 1 BL4IC, BL4, BL4R 50\ ral	35W 12V MR16		
Lighting	Lighting	3	BL4-75, BL4R-75	75W 12V MR16
		4	G4IC, G4, G4R	50W 120V GU10



 $\mathbb{Z} \cap \mathbb{Z}$ 

# collection

The all new stainless steel series trims from Elite Lighting are the perfect fit for any outdoor projects requiring durable recessed trims. The life cycle of our stainless steel trims is three times longer than a conventional trim, so you won't have to worry about replacing trims in a very long time. Due to our high grade stainless steel material, these trims are RUSTPROOF and corrosion proof which makes them withstand even the most harsh environments, including beach homes near salt water and outdoor environments.

### **B1470SS**

4" Adjustable Stainless Steel Gimbal Trim



4" Adjustable Stainless Steel Lensed Trim

# B1472SS

4" Adjustable Stainless Steel Eveball Trim






### DESCRIPTION

- All Stainless Steel construction is used for functionality and aesthetics
- Lamp holder provides 40° of precise adjustability
- · Internal gasket prevents light leakage.

### DESCRIPTION:



- Lamp holder provides 20° of precise adjustability
- · Internal gasket prevents light leakage.
- · Tempered clear glass lens.

### HOUSING COMPATIBILITY GUIDE



WET



- All Stainless Steel construction is used for functionality and aesthetics.
- Lamp holder provides 20° of precise adjustability.
- · Internal gasket prevents light leakage.





# B1474SS

HOUSING COMPATIBILITY GUIDE

4" Adjustable Stainless Steel Square Gimbal Trim



4" Adjustable Stainless Steel Square Lensed Trim

4" Adjustable Stainless Steel Square Eyeball Trim



### **DESCRIPTION:**

- All Stainless Steel construction is used for functionality and aesthetics
- Lamp holder provides 40° of precise adjustability
- Internal gasket prevents light leakage.

### **DESCRIPTION:**

- All Stainless Steel construction is used for functionality and aesthetics.
- · Lamp holder provides 20° of precise adjustability.
- · Internal gasket prevents light leakage.
- · Tempered clear glass lens

### HOUSING COMPATIBILITY GUIDE



BL4IC-S, BL40ICE-S, BL4E-S, BL4RE-S



FOR



- All Stainless Steel construction is used for functionality and aesthetics.
- Lamp holder provides 20° of precise adjustability
- Internal gasket prevents light leakage.



G4IC, G4, G4R



7		200		ш
Ш	2	4		ш
			ш	ш
	ш		ш	ш

FINISH TRIM	0. D.
SS - Stainless Steel	4-7/8"











DAFFLE FINION.	
W	White
P	Black
SN	Satin Nickel
CP	Copper
BZ	Bronze

### REFLECTOR FINISH:

CL	Chrome
RG	Gold
W	White
MB	Black

### Bronze CP Copper SN Satin Nickel Satin Haze

KING/	IKIM FINISH:
WH	White
BK	Black
SN	Satin Nickel
CD	Conner

Chrome Polish Brass PB ΒZ Bronze

35W 12V MR16















ATT NO.



BAFFLE: W, P, SN, CP, BZ

TRIM-WH, BK, SN, CP, CH, PB. B7

PATENT #: D510,151 HOUSING COMPATIBILITY GUIDE:

Reflector (35° Tilt)





REFLECTOR: CL, RG, W, MB, CP, SN, BZ, SHZ TRIM: WH, BK, SN, CP, CH, PB, BZ

PATENT #: D510,151
















TRIM: WH, BK, SN, CP, CH, PB. B7






























B1486WH



Eveball (47° Tilt)























1 2 3 4















MR16 LENS FILTER BP8MR16-BL BLUE BP8MR16-GR GREEN BP8MR16-PI PINK BP8MR16-PU **PURPLE** BP8MR16-DL DAY LIGHT

BP8MR16-YE BP8MR16-AM BP8MR16-OR BP8MR16-RE

YFI I OW AMBFR **ORANGE** RED





1. BP8MR16-FR 2. BP8MR16-SP 3. BP8MR16-SF

TYPE

FROSTED SPREAD SOFT FOCUS HONEY COMB

CAT. # 5. **BP8MR16-LI** 6. BP8MR16-SOL 7. BP8MR16-CL

8. BP8MR16-UV

TYPE LINEAR SOLITE **CLEAR** ULTRAVIOLET





B1434WH

Stripe Wall Wash Lite



B1435WH

Stripe Wall Wash Lite



B1436WH




































Copper

1 2 3 4

GLASS:

TRIM:

BLUE, GREEN.

PEACH, FROSTED

WH, BK, SN, CP,

HOUSING COMPATIBILITY GUIDE-

CH, PB, BZ

REFL	ECTOR FINIS
CL	Chrome
RG	Gold
W	White
MB	Black



Satin Nickel

Satin Haze

B1420WH-CLEAR

Metropolitan Moon Lite





1 2 3 4

HOUSING COMPATIBILITY GUIDE:

CH, PB, BZ





Lighting


1 2 3 4






SN











HOUSING COMPATIBILITY GUIDE:

1234

Crystal Rose Lite

GLASS:

TRIM: WH, BK, SN, CP,

CRYSTAL

CH, PB, BZ

1 2 4

Agua SERIES

Elite Lighting's Aqua Series is specifically designed for showers and wet locations. These fixtures represent products that the market has demanded for a very long time. With its fully silicon glass and gasketed ring, the consumer is assured that no harm will be done to the housing and electrical systems.















HOUSING COMPATIBILITY GUIDE







ALL TRIMS ABOVE MIGHT BE SUBJECT TO PATENT

GUIDE	HOUSING COMPATIBILITY	MAX. LAMP WATTAGE
	BL4IC, BL4, BL4R	50W 12V MR16
	BL4IC -S, BL40ICE-S, BL4E-S, BL4RE-S	35W 12V MR16
	BL4-75, BL4R-75	75W 12V MR16
4	G4IC, G4, G4R	50W 120V GU10



MR16 LENS FILTER BP8MR16-BL BLUE BP8MR16-GR GREEN BP8MR16-PI PINK BP8MR16-PU **PURPLE** 

BP8MR16-DL

BP8MR16-YE BP8MR16-AM BP8MR16-OR BP8MR16-RE

YELLOW AMRER ORANGE RED



	CAT. #
	1. BP8MR16-FR
	2. BP8MR16-SP
6	3. BP8MR16-SF
	4. BP8MR16-HC

BP8MR16-FR BP8MR16-SP BP8MR16-SF

**TYPE** FROSTED SPREAD SOFT FOCUS HONEY COMB CAT. # 5. BP8MR16-LI 6. BP8MR16-SOL 7 BP8MR16-CL

8. BP8MR16-UV

TYPE LINFAR SOLITE CI FAR ULTRAVIOLET

DAY LIGHT












### **ANGLE-CUT TRIM**

- · Reflector gives maximum light spread and glare control
- Unitized optics guarantee proper alignment of lamp
- Can take up to 2 optical accessories
- All die-cast construction is for functional and aesthetic use
- Internal gasket prevents 100% of all light leakage

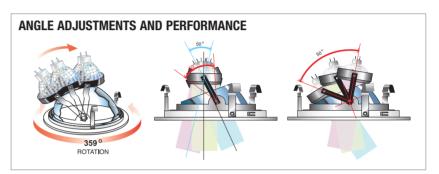










**GUIDE** 















U	3 (	3	4	
BAFFI	LE FII	NIS	H:	
W	Wh	ite		
P	Bla	ck		
CNI	0.1		e a caraci	

E FINISH:	REFLECTOR FINI		
White	CL	Chrome	
Black	RG	Gold	
Satin Nickel	W	White	
Copper	MB	Black	

ISH:	BZ CP





ALL TRIMS ABOVE MIGHT BE SUBJECT TO PATENT


HOUSING COMPATIBILITY

BL4IC, BL4, BL4R

BL4-75, BL4R-75

G4IC, G4, G4R





MAX. LAMP WATTAGE

Geno Ligh	
Wall	Wash



**Sloped Ceiling** 



Task Lighting











BAFFLE: W, P, SN, CP, BZ

TRIM: WH, BK, SN, CP, CH, PB, BZ

B1416P-WH








B1407CL-WH

Reflector Wall Wash

B1402CP-WH

Reflector (35° Tilt)



B1403WH









WALL WASH COVER: WH







Metal Stepped Baffle



















# ALL TRIMS ABOVE MIGHT BE SUBJECT TO PATENT

GUIDE	HOUSING COMPATIBILITY	MAX. LAMP WATTAGE
	BL4IC, BL4, BL4R	50W 12V MR16
	BL4IC-S, BL40ICE-S, BL4E-S, BL4RE-S	35W 12V MR16
3	BL4-75, BL4R-75	75W 12V MR16
4	G4IC, G4, G4R	50W 120V GU10



MR16 LENS FILTER BP8MR16-BL BLUE BP8MR16-GR GREEN BP8MR16-PI PINK BP8MR16-PU **PURPLE** BP8MR16-DL DAY LIGHT

BP8MR16-YE BP8MR16-AM BP8MR16-OR BP8MR16-RE







**TYPE** FROSTED SPREAD SOFT FOCUS HONEY COMB

CAT. #


5. BP8MR16-LI 6. BP8MR16-SOL 7. BP8MR16-CL 8. BP8MR16-UV





WH, BK, SN, CP, CH, PB, BZ

123




• All die-cast construction is for functional and aesthetic use

· Can take up to 2 optical accessories

• Used to accentuate an artwork or a particular object

• Relamps from the front















B1412CH Fully Adjustable (35° Tilt, 359° Rot.)





B1468W-WH Fully Adj. w/ Baffle (35° Tilt, 359° Rot.)



Adjustable Pinhole Baffle (15° Tilt)





B1461SN Adjustable Gimbal (40° Tilt)






1234



HOUSING COMPATIBILITY GUIDE: 123





**AVAILABLE COLOR** COMBINATIONS W-WH, P-WH, P-BK, P-PB




B1419BK Adjustable Spot (40° Tilt)



WH, BK, SN, CP, CH, PB, BZ

HOUSING COMPATIBILITY GUIDE

1 2 3 4



1234

B1433P-WH











HOUSING COMPATIBILITY	MAX. LAMP WAT
BL4IC, BL4, BL4R	50W 12V MR16
BL4IC-S, BL4OICE-S, BL4E-S, BL4RE-S	35W 12V MR16
BL4-75, BL4R-75	75W 12V MR16
G4IC, G4, G4R	50W 120V GU10

ALL TRIMS ABOVE MIGHT BE SUBJECT TO PATENT



**MR16 LENS FILTER** BP8MR16-BL BP8MR16-GR BP8MR16-PI BP8MR16-PU

BP8MR16-DL

BLUE GREEN PINK PLIRPI F DAY LIGHT

BP8MR16-YE BP8MR16-AM BP8MR16-OR BP8MR16-RE



CAT. # 1. BP8MR16-FR 2. BP8MR16-SP

3. BP8MR16-SF 4 BP8MR16-HC

TYPE FROSTED SPREAD

SOFT FOCUS HONEY COMB CAT. # 5. **BP8MR16-LI** 

6. **BP8MR16-SOL** 7. BP8MR16-CL 8. BP8MR16-UV

TYPE LINEAR SOLITE CI FAR ULTRAVIOLET

BAFFLI	E FINISH:
147	VARIATE.

Black SN Satin Nickel Copper

REFLECTOR FINISH: Chrome

RG Gold White Black

Bronze CP Copper Satin Nickel SN Satin Haze

RING/TRIM FINISH: WH White

YELLOW

AMBER

ORANGE

RFD

BK Black SN Satin Nickel CP Copper

Chrome PB Polish Brass ΒZ Bronze











