

4" DEDICATED MR16 LED IC SERIES HOUSING

BL4IC-HRS1260M

4" MINIATURE DEDICATED MR16 LED IC HOUSING

INPUT VOLT.	INPUT FREQ.	WATT	CRI	COLOR TEMP.	LUMENS
120	50/60Hz	7W	80.0	2700°K/3000°K	390

SPECIFICATION

OUTER HOUSING - Die-formed aluminum construction for maximum heat dissipating air chamber on top of the housing. Junction box could be accessed from inside and outside housing.

INNER HOUSING - Deep-drawn single piece aluminum construction for maximum heat dissipation and rust protection. Adjusts vertically in plaster frame to accommodate 1/2" to 1-3/8" ceiling.

DRIVER - Class II dimming electronic driver.

BAR HANGERS - Preinstalled bar hangers allow housing to be positioned and locked at any point within a 24" joist span and can be shortened for 12" joists. They contain a double-headed real nail for secure attachment into the joist. Bar hanger nails are installed on a 20° downward angle for better contact, and the 90° pivoting mounting plate makes installation fast and accurate. Bar hangers can fit onto T-Bar spline with additional slots and holes for special mounting methods if necessary.

JUNCTION BOX - through-branch circuit wiring and has four 1/2" KOs, one 3/4" KO and four Romex knockouts with true pry-out slots and strain clamps.

OPTION

1. AIR-SHUT - Gasket to prevent air flow from heated or air conditioned spaces.

- Meets all national air flow requirements.

25,000 hrs
RATED LIFE



TYPE	GE MR16 LED LAMP INCLUDED		VOLTAGE	OPTION
BL4IC-HRS1260M	<input type="checkbox"/> LED7DMR16/830/15	<input type="checkbox"/> LED7DMR16/827/15	<input type="checkbox"/> 120	<input type="checkbox"/> AT Air-Shut
	<input type="checkbox"/> LED7DMR16/830/25	<input type="checkbox"/> LED7DMR16/827/25		
	<input type="checkbox"/> LED7DMR16/830/35	<input type="checkbox"/> LED7DMR16/827/35		
	<input type="checkbox"/> LED7DMR16/NFL/TP			


390
LUMENS



DESIGNED FOR 2" X 8" JOIST CONSTRUCTION

DESCRIPTION

Developed especially for LED MR16 lamp applications. Crafted for sustainability and environmentally sensitive applications. Five times the life expectancy of halogen MR16 with 80% energy savings. Small aperture LED MR16 dedicated, thermally protected, New Construction IC rated Housing, furnished with preinstalled adjustable bar hangers.

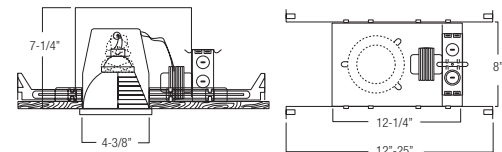

4"

INPUT VOLT.	INPUT FREQ.	WATT	CRI	COLOR TEMP.	LUMENS
120	50/60Hz	7W	80.0	2700°K/3000°K	390

BL4IC-S-HRS1260M

4" MINIATURE DEDICATED MR16 LED SHALLOW IC HOUSING

SPECIFICATION

OUTER HOUSING - Die-formed aluminum construction for maximum heat dissipating air chamber on top of the housing. Junction box could be accessed from inside and outside housing.

INNER HOUSING - Deep-drawn single piece aluminum construction for maximum heat dissipation and rust protection. Adjusts vertically in plaster frame to accommodate 1/2" to 1-3/8" ceiling.

DRIVER - Class II dimming electronic driver.

BAR HANGERS - Preinstalled bar hangers allow housing to be positioned and locked at any point within a 24" joist span and can be shortened for 12" joists. They contain a double-headed real nail for secure attachment into the joist. Bar hanger nails are installed on a 20° downward angle for better contact, and the 90° pivoting mounting plate makes installation fast and accurate. Bar hangers can fit onto T-Bar spline with additional slots and holes for special mounting methods if necessary.

JUNCTION BOX - through-branch circuit wiring and has four 1/2" KOs, one 3/4" KO and four Romex knockouts with true pry-out slots and strain clamps.

OPTION

1. AIR-SHUT - Gasket to prevent air flow from heated or air conditioned spaces.

- Meets all national air flow requirements.

25,000 hrs
RATED LIFE



TYPE	GE MR16 LED LAMP INCLUDED		VOLTAGE	OPTION
BL4IC-S-HRS1260M	<input type="checkbox"/> LED7DMR16/830/15	<input type="checkbox"/> LED7DMR16/827/15	<input type="checkbox"/> 120	<input type="checkbox"/> AT Air-Shut
	<input type="checkbox"/> LED7DMR16/830/25	<input type="checkbox"/> LED7DMR16/827/25		
	<input type="checkbox"/> LED7DMR16/830/35	<input type="checkbox"/> LED7DMR16/827/35		
	<input type="checkbox"/> LED7DMR16/NFL/TP			


390
LUMENS



DESIGNED FOR 2" X 6" JOIST CONSTRUCTION

DESCRIPTION

Developed especially for LED MR16 lamp applications. Crafted for sustainability and environmentally sensitive applications. Five times the life expectancy of halogen MR16 with 80% energy savings. Small aperture LED MR16 dedicated, thermally protected, New Construction IC rated Shallow Housing, furnished with preinstalled adjustable bar hangers.

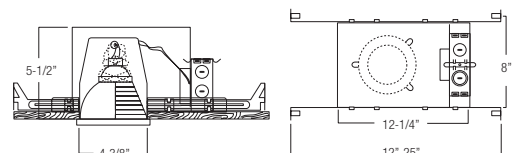

4 INCH DEDICATED MR16 LED IC HOUSING

4-inch Recessed Diamond Collection

The new crystal collection from Elite Lighting is more than just a trim, it's a form of art. Brilliant crystal jewels are aligned perfectly to provide a unique and sophisticated appearance to any space. Enhance the appearance of hallways, lobbies or waiting areas into an elegant appealing space. Different size crystals, along with a variety of colors make the Crystal Collection a beautiful masterpiece.

B1451CH
Ruby I



DESCRIPTION:

- All die-cast construction with enhanced clear crystals
- Internal gasket prevents light leakage
- Chrome trim finish standard on all trims

HOUSING COMPATIBILITY GUIDE:

1 2 3 4



B1453CH
Ruby II



DESCRIPTION:

- All die-cast construction with enhanced clear crystals
- Internal gasket prevents light leakage
- Chrome trim finish standard on all trims

HOUSING COMPATIBILITY GUIDE:

1 2 3 4



B1454CH
Sapphire I



DESCRIPTION:

- All die-cast construction with enhanced clear crystals
- Internal gasket prevents light leakage
- Chrome trim finish standard on all trims

HOUSING COMPATIBILITY GUIDE:

1 2 3 4



B1455CH
Sapphire II



DESCRIPTION:

- All die-cast construction with enhanced clear crystals
- Internal gasket prevents light leakage
- Chrome trim finish standard on all trims

HOUSING COMPATIBILITY GUIDE:

1 2 3 4



B1456CH
Emerald I



DESCRIPTION:


- All die-cast construction with enhanced color crystals
- Internal gasket prevents light leakage
- Chrome trim finish standard on all trims

HOUSING COMPATIBILITY GUIDE:

1 2 3 4



B1457CH
Emerald II



DESCRIPTION:

- All die-cast construction with enhanced amber crystals
- Internal gasket prevents light leakage
- Chrome trim finish standard on all trims

HOUSING COMPATIBILITY GUIDE:

1 2 3 4



B1458CH
Topaz I



DESCRIPTION:

- All die-cast construction with enhanced color crystals
- Internal gasket prevents light leakage
- Chrome trim finish standard on all trims

HOUSING COMPATIBILITY GUIDE:

1 2 3 4



B1459CH
Topaz II



DESCRIPTION:


- All die-cast construction with enhanced color crystals
- Internal gasket prevents light leakage
- Chrome trim finish standard on all trims

HOUSING COMPATIBILITY GUIDE:

1 2 3 4



B1460CH
Onyx

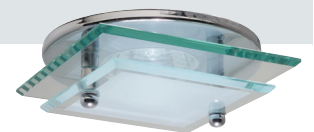

DESCRIPTION:

- All die-cast construction with frosted glass
- Internal gasket prevents light leakage
- Chrome trim finish standard on all trims

HOUSING COMPATIBILITY GUIDE:

1 2 3 4



FINISH TRIM	TRIM OUTSIDE DIA.	GUIDE	HOUSING COMPATIBILITY	MAX. LAMP WATTAGE
CH - Chrome	4-7/8"	1	BL4IC, BL4, BL4R	50W 12V MR16
		2	BL4IC-S, BL40ICE-S, BL4E-S, BL4RE-S	35W 12V MR16
		3	BL4-75, BL4R-75	75W 12V MR16
		4	G4IC, G4, G4R	50W 120V GU10



General Lighting



Task Lighting

4-inch stainless steel collection

The all new stainless steel series trims from Elite Lighting are the perfect fit for any outdoor projects requiring durable recessed trims. The life cycle of our stainless steel trims is three times longer than a conventional trim, so you won't have to worry about replacing trims in a very long time. Due to our high grade stainless steel material, these trims are RUSTPROOF and corrosion proof which makes them withstand even the most harsh environments, including beach homes near salt water and outdoor environments.

B1470SS

4" Adjustable Stainless Steel Gimbal Trim

NEW



DESCRIPTION:

- All Stainless Steel construction is used for functionality and aesthetics.
- Lamp holder provides 40° of precise adjustability.
- Internal gasket prevents light leakage.

HOUSING COMPATIBILITY GUIDE:

1 2 3 4



B1471SS

4" Adjustable Stainless Steel Lensed Trim

NEW



DESCRIPTION:

- All Stainless Steel construction is used for functionality and aesthetics.
- Lamp holder provides 20° of precise adjustability.
- Internal gasket prevents light leakage.
- Tempered clear glass lens.

HOUSING COMPATIBILITY GUIDE:

1 2 3 4



B1472SS

4" Adjustable Stainless Steel Eyeball Trim

NEW



DESCRIPTION:

- All Stainless Steel construction is used for functionality and aesthetics.
- Lamp holder provides 20° of precise adjustability.
- Internal gasket prevents light leakage.

HOUSING COMPATIBILITY GUIDE:

1 2 3 4



B1474SS

4" Adjustable Stainless Steel Square Gimbal Trim

NEW



DESCRIPTION:

- All Stainless Steel construction is used for functionality and aesthetics.
- Lamp holder provides 40° of precise adjustability.
- Internal gasket prevents light leakage.

HOUSING COMPATIBILITY GUIDE:

1 2 3 4



B1475SS

4" Adjustable Stainless Steel Square Lensed Trim

NEW



DESCRIPTION:

- All Stainless Steel construction is used for functionality and aesthetics.
- Lamp holder provides 20° of precise adjustability.
- Internal gasket prevents light leakage.
- Tempered clear glass lens.

HOUSING COMPATIBILITY GUIDE:

1 2 3 4



B1476SS

4" Adjustable Stainless Steel Square Eyeball Trim

NEW



DESCRIPTION:

- All Stainless Steel construction is used for functionality and aesthetics.
- Lamp holder provides 20° of precise adjustability.
- Internal gasket prevents light leakage.

HOUSING COMPATIBILITY GUIDE:

1 2 3 4



FINISH TRIM	O. D.	GUIDE	HOUSING COMPATIBILITY	MAX. LAMP WATTAGE	GUIDE	HOUSING COMPATIBILITY	MAX. LAMP WATTAGE
SS - Stainless Steel	4-7/8"	1	BL4IC, BL4, BL4R	50W 12V MR16	3	BL4-75, BL4R-75	75W 12V MR16
		2	BL4IC-S, BL40ICE-S, BL4E-S, BL4RE-S	35W 12V MR16	4	G4IC, G4, G4R	50W 120V GU10

BAFFLE FINISH:

W White
P Black
SN Satin Nickel
CP Copper
BZ Bronze

REFLECTOR FINISH:

CL Chrome
RG Gold
W White
MB Black

BZ Bronze
CP Copper
SN Satin Nickel
SHZ Satin Haze

RING/TRIM FINISH:

WH White
BK Black
SN Satin Nickel
CP Copper
CH Chrome
PB Polish Brass
BZ Bronze



General Lighting



Accent Lighting



Task Lighting



Wall Wash Lighting



Sloped Ceiling Lighting

B1478SN-SN

Stepped Baffle (35° Tilt)




BAFFLE:
W, P, SN, CP, BZ

TRIM:
WH, BK, SN, CP, CH,
PB, BZ

PATENT #: D510,151

HOUSING COMPATIBILITY GUIDE:
1 2 3 4



B1488CP


Surface Adjustable (90° Tilt, 359° Rot.)



TRIM:
WH, BK, SN, CP, CH,
PB, BZ

PATENT #: D510,151

HOUSING COMPATIBILITY GUIDE:
1 2 3



B1486WH


Fully Adjustable (75° Tilt, 359° Rot.)



TRIM:
WH, BK, SN, CP, CH,
PB, BZ

PATENT #: D510,151

HOUSING COMPATIBILITY GUIDE:
1 2 3



B1489W-WH


Adjustable Pinhole w/ Baffle (35° Tilt)



AVAILABLE COLOR COMBINATIONS:
W-WH, P-WH

PATENT #: D510,151

HOUSING COMPATIBILITY GUIDE:
1 2 3 4



B1479CL-CH

Reflector (35° Tilt)




REFLECTOR:
CL, RG, W, MB, CP,
SN, BZ, SHZ

TRIM:
WH, BK, SN, CP, CH,
PB, BZ

PATENT #: D510,151

HOUSING COMPATIBILITY GUIDE:
1 2 3 4



B1487WH


Adjustable Spot (40° Tilt)



TRIM:
WH, BK

PATENT #: D510,151

HOUSING COMPATIBILITY GUIDE:
1 2 3 4



B1485W-WH


Eyeball (47° Tilt)



AVAILABLE COLOR COMBINATIONS:
CP-CP, SN-SN, W-WH,
P-WH, P-BK, BZ-BZ


PATENT #: D510,151

HOUSING COMPATIBILITY GUIDE:
1 2 3 4



B1491P-WH


Pinhole with Baffle



AVAILABLE COLOR COMBINATIONS:
CP-CP, SN-SN, W-WH,
P-WH, P-BK, BZ-BZ

PATENT #: D510,151

HOUSING COMPATIBILITY GUIDE:
1 2 3 4



B1480WH


Fully Adjustable (35° Tilt, 359° Rot.)



TRIM:
WH, BK, SN, CP, CH,
PB, BZ

PATENT #: D510,151

HOUSING COMPATIBILITY GUIDE:
1 2 3 4



B1495CL-SN

Semi-Frosted Shower Trim




REFLECTOR:
CL, RG, W, MB, CP, SN,
BZ, SHZ

TRIM:
WH, BK, SN, CP, CH,
PB, BZ

PATENT #: D510,151

HOUSING COMPATIBILITY GUIDE:
1 2 4



B1490WH-PEACH

Metropolitan Ice Lite




GLASS:
BLUE, GREEN, AMBER,
PEACH, FROSTED, CLEAR

TRIM:
WH, BK, SN, CP, CH,
PB, BZ

PATENT #: D510,151

HOUSING COMPATIBILITY GUIDE:
1 2 3 4



B1492WH-BLUE

Metropolitan Ice Lite




GLASS:
BLUE, GREEN, AMBER,
PEACH, FROSTED, CLEAR

TRIM:
WH, BK, SN, CP, CH,
PB, BZ

PATENT #: D510,151

HOUSING COMPATIBILITY GUIDE:
1 2 3 4



B1481WH


Adjustable Gimbal (40° Tilt)



TRIM:
WH, BK, SN, CP, CH,
PB, BZ

PATENT #: D510,151

HOUSING COMPATIBILITY GUIDE:
1 2 3 4



B1494WH-BLUE

Designer Square Step Lite




GLASS:
BLUE, GREEN, PEACH,
FROSTED

TRIM:
WH, BK, SN, CP, CH,
PB, BZ


PATENT #: D510,151

HOUSING COMPATIBILITY GUIDE:
1 2 3 4



B1483WH


Slot Aperture (35° Tilt)



TRIM:
WH, BK, SN, CP, CH,
PB, BZ

PATENT #: D510,151

HOUSING COMPATIBILITY GUIDE:
1 2 3 4



B1484P-WH


Fully Adj. w/ Baffle (35° Tilt, 359° Rot.)



AVAILABLE COLOR COMBINATIONS:
CP-CP, SN-SN, W-WH,
P-WH, P-BK, BZ-BZ

PATENT #: D510,151

HOUSING COMPATIBILITY GUIDE:
1 2 3 4



MR16 LENS FILTER

BP8MR16-BL BLUE
BP8MR16-GR GREEN
BP8MR16-PI PINK
BP8MR16-PU PURPLE
BP8MR16-DL DAY LIGHT

BP8MR16-YE YELLOW
BP8MR16-AM AMBER
BP8MR16-OR ORANGE
BP8MR16-RE RED



CAT.

1. BP8MR16-FR FROSTED
2. BP8MR16-SP SPREAD
3. BP8MR16-SF SOFT FOCUS
4. BP8MR16-HC HONEY COMB

TYPE


FROSTED
SPREAD
SOFT FOCUS
HONEY COMB

CAT.


5. BP8MR16-LI LINEAR
6. BP8MR16-SOL SOLITE
7. BP8MR16-CL CLEAR
8. BP8MR16-UV ULTRAVIOLET

4" LOW VOLTAGE GLASS TRIMS


B1432WH
Wall Wash Frost Lite

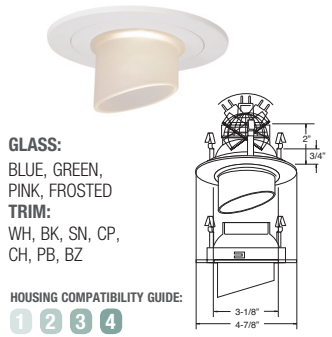


B1434WH
Stripe Wall Wash Lite

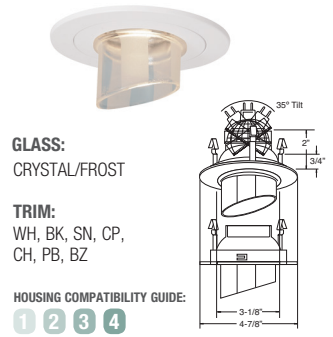


B1435WH
Stripe Wall Wash Lite

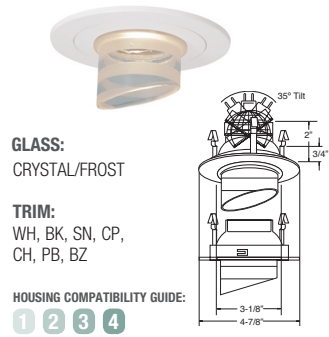


B1436WH
Cylinder Lite

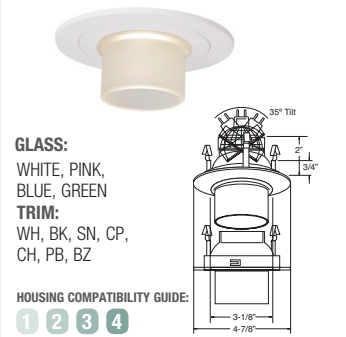


B1440WH-PINK
Tulip Lite

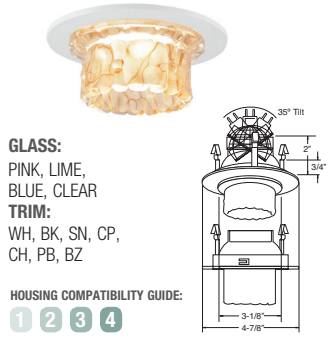


B1441WH-LIME
Designer Wall Wash Lite

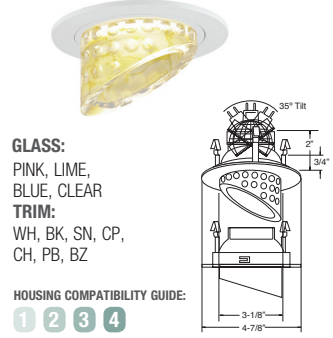

B1421WH-FROSTED
Mini-Step Lens Lite

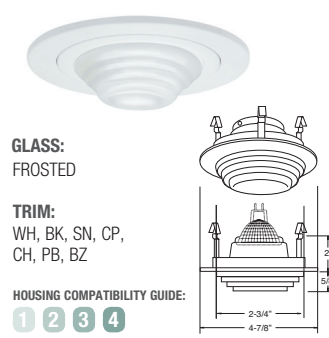


B1424WH-RED
Metropolitan Honey Lite

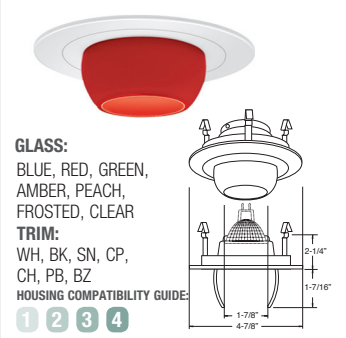


B1423WH-WHITE
Metropolitan Opal Lens Lite



B1409WH-BLUE
Pyramid Glass Lite

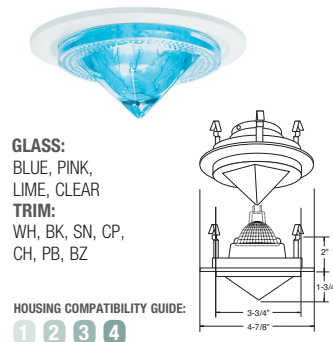


B1425WH-AMBER
Metropolitan Step Lite

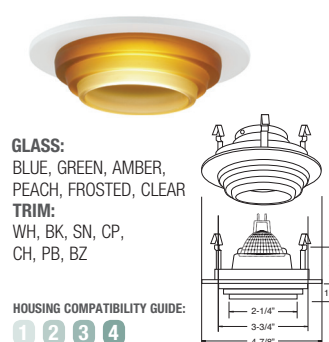

B1469WH-BLUE
Designer Step Lite



B1442WH-PEACH
Designer Moon Lite

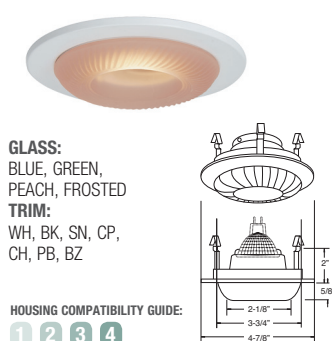

B1420WH-CLEAR
Metropolitan Moon Lite



B1422WH-FROSTED
Metropolitan Ice Lite



B1431WH
Crystal Stripe Lite




BAFFLE FINISH:
W White
P Black
SN Satin Nickel
CP Copper
BZ Bronze

REFLECTOR FINISH:
CL Chrome
RG Gold
W White
MB Black

BZ Bronze
CP Copper
SN Satin Nickel
SHZ Satin Haze

RING/TRIM FINISH:
WH White
BK Black
SN Satin Nickel
CP Copper

CH Chrome
PB Polish Brass
BZ Bronze




4 INCH LOW VOLTAGE GLASS TRIMS

B1496CP
Square Baffle w/ Square Trim



AVAILABLE COLOR COMBINATIONS:
W-WH, P-WH, P-BK, CP-CP, SN-SN, BZ-BZ

HOUSING COMPATIBILITY GUIDE:
1 2 3 4




B1413P-SN
Pull Down Adjustable



BAFFLE:
W, P, SN, CP, BZ

TRIM:
WH, BK, SN, CP, CH, PB, BZ

HOUSING COMPATIBILITY GUIDE:
1 2 3




B1426CL-WH
The Illuminator II



AVAILABLE COLOR COMBINATIONS:
CL-BJK, CL-WH, RG-WH, W-WH

HOUSING COMPATIBILITY GUIDE:
1 2 3 4




B1427CL-WH
The Illuminator



AVAILABLE COLOR COMBINATIONS:
CL-BK, CL-WH

HOUSING COMPATIBILITY GUIDE:
1 2 3 4



FOR WET LOCATION

Aqua SERIES

Elite Lighting's Aqua Series is specifically designed for showers and wet locations. These fixtures represent products that the market has demanded for a very long time. With its fully silicon glass and gasketed ring, the consumer is assured that no harm will be done to the housing and electrical systems.


B1430WH
Crystal Rose Lite



GLASS:
CRYSTAL

TRIM:
WH, BK, SN, CP, CH, PB, BZ

HOUSING COMPATIBILITY GUIDE:
1 2 4




B1462CL-WH
Semi-Frosted Shower Trim



REFLECTOR:
CL, RG, W, MB, CP, SN, BZ, SHZ

TRIM:
WH, BK, SN, CP, CH, PB, BZ

MAX 10W APPROVED.
HOUSING COMPATIBILITY GUIDE:
1 2 4




B1452CL-WH
Clear Lens Shower Trim



REFLECTOR:
CL, RG, W, MB, CP, SN, BZ, SHZ

TRIM:
WH, BK, SN, CP, CH, PB, BZ

HOUSING COMPATIBILITY GUIDE:
1 2 4




B1437WH
Smooth Frost Shower Lite



REFLECTOR:
CL

TRIM:
WH, BK, SN, CP, CH, PB, BZ

HOUSING COMPATIBILITY GUIDE:
1 2 4




B1438WH
Designer Point Shower Lite



REFLECTOR:
CL

TRIM:
WH, BK, SN, CP, CH, PB, BZ

HOUSING COMPATIBILITY GUIDE:
1 2 4




B1439WH
Smooth Frost Dome Shower Lite



REFLECTOR:
CL

TRIM:
WH, BK, SN, CP, CH, PB, BZ

HOUSING COMPATIBILITY GUIDE:
1 2 4



ALL TRIMS ABOVE MIGHT BE SUBJECT TO PATENT

GUIDE	HOUSING COMPATIBILITY	MAX. LAMP WATTAGE
1	BL4IC, BL4, BL4R	50W 12V MR16
2	BL4IC -S, BL40ICE-S, BL4E-S, BL4RE-S	35W 12V MR16
3	BL4-75, BL4R-75	75W 12V MR16
4	G4IC, G4, G4R	50W 120V GU10



MR16 LENS FILTER
BP8MR16-BL BLUE
BP8MR16-GR GREEN
BP8MR16-PI PINK
BP8MR16-PU PURPLE
BP8MR16-DL DAY LIGHT

BP8MR16-YE YELLOW
BP8MR16-AM AMBER
BP8MR16-OR ORANGE
BP8MR16-RE RED



CAT. #
1. BP8MR16-FR
2. BP8MR16-SP
3. BP8MR16-SF
4. BP8MR16-HC

TYPE
FROSTED
SPREAD
SOFT FOCUS
HONEY COMB

CAT. #
5. BP8MR16-LI
6. BP8MR16-SOL
7. BP8MR16-CL
8. BP8MR16-UV


4" LOW VOLTAGE ANGLE-CUT TRIMS



ANGLE-CUT TRIM

- Reflector gives maximum light spread and glare control
- Unitized optics guarantee proper alignment of lamp
- Can take up to 2 optical accessories
- All die-cast construction is for functional and aesthetic use
- Internal gasket prevents 100% of all light leakage

ANGLE ADJUSTMENTS AND PERFORMANCE

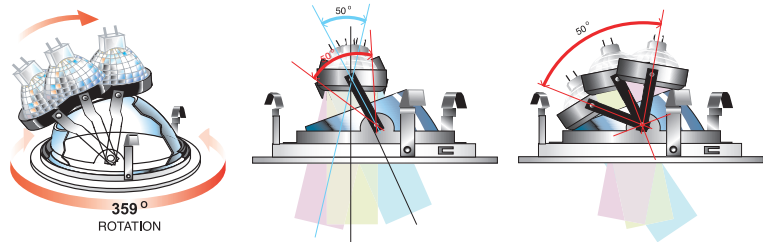

B1463RG-WH Angle-Cut Wall Wash Reflector



REFLECTOR:

CL, RG, W, MB, CP, SN, BZ, SHZ

TRIM:

WH, BK, SN, CP, CH, PB, BZ

HOUSING COMPATIBILITY GUIDE:

1 2 3 4

B1467CL-WH Lensed Wall Wash



REFLECTOR:

CL, RG, W, MB, CP, SN, BZ, SHZ

TRIM:

WH, BK

HOUSING COMPATIBILITY GUIDE:

1 2 3 4

B1464CP-CP Angle-Cut Wall Wash Baffle



BAFFLE:

W, P, SN, CP, BZ

TRIM:

WH, BK, SN, CP, CH, PB, BZ

HOUSING COMPATIBILITY GUIDE:

1 2 3 4

B1465CL-WH Angle-Cut Wall Wash Pinhole



REFLECTOR:

CL, RG, W, MB, CP, SN, BZ, SHZ

TRIM:

WH, SN, CP

HOUSING COMPATIBILITY GUIDE:

1 2 3 4

B1466CP Angle-Cut Slot Wall Wash Aperture



TRIM:

WH, BK, SN, CP, CH, PB, BZ

HOUSING COMPATIBILITY GUIDE:

1 2 3 4

ALL TRIMS ABOVE MIGHT BE SUBJECT TO PATENT

GUIDE	HOUSING COMPATIBILITY	MAX. LAMP WATTAGE
1	BL4IC, BL4, BL4R	50W 12V MR16
2	BL4IC-S, BL4OICE-S, BL4E-S, BL4RE-S	35W 12V MR16
3	BL4-75, BL4R-75	75W 12V MR16
4	G4IC, G4, G4R	50W 120V GU10

BAFFLE FINISH:

W White
P Black
SN Satin Nickel
CP Copper
BZ Bronze

REFLECTOR FINISH:

CL Chrome
RG Gold
W White
MB Black

BZ Bronze
CP Copper
SN Satin Nickel
SHZ Satin Haze

RING/TRIM FINISH:

WH White
BK Black
SN Satin Nickel
CP Copper

CH Chrome
PB Polish Brass
BZ Bronze




B1401CP-CP Stepped Baffle (35° Tilt)



BAFFLE:
W, P, SN, CP, BZ

TRIM:
WH, BK, SN, CP, CH,
PB, BZ

HOUSING COMPATIBILITY GUIDE:
1 2 3 4




B1402CP-WH Reflector (35° Tilt)




REFLECTOR:
CL, RG, W, MB, CP, SN,
BZ, SHZ

TRIM:
WH, BK, SN, CP, CH,
PB, BZ

HOUSING COMPATIBILITY GUIDE:
1 2 3 4




B1403WH One Piece Slot Aperture (35° Tilt)



TRIM:
WH, BK, SN, CP, CH,
PB, BZ

HOUSING COMPATIBILITY GUIDE:
1 2 3 4




B1411WH Slot Aperture (35° Tilt, 179° Rotation)



TRIM:
WH, BK, SN, CP, CH, PB

HOUSING COMPATIBILITY GUIDE:
1 2 3 4




B1416P-WH Baffle Wall Wash



BAFFLE:
W, P, SN, CP, BZ

WALL WASH COVER:
WH

HOUSING COMPATIBILITY GUIDE:
1 2 3 4




B1407CL-WH Reflector Wall Wash




REFLECTOR:
CL, RG, W, MB, CP, SN,
BZ, SHZ

WALL WASH COVER:
WH

HOUSING COMPATIBILITY GUIDE:
1 2 3 4




B1414P-WH Pinhole with Baffle



AVAILABLE COLOR COMBINATIONS:
CP-CP, SN-SN, W-WH,
P-WH, P-BK, BZ-BZ,
SN-WH

HOUSING COMPATIBILITY GUIDE:
1 2 3 4




B1415RG-WH Pinhole with Reflector



AVAILABLE COLOR COMBINATIONS:
CP-CP, SN-SN, RG-WH,
MB-WH, W-WH, CL-WH,
CL-SN

HOUSING COMPATIBILITY GUIDE:
1 2 3 4




B1404P-WH Eyeball (47° Tilt)



AVAILABLE COLOR COMBINATIONS:
CP-CP, SN-SN, W-WH,
P-WH, P-BK, BZ-BZ, P-PB

HOUSING COMPATIBILITY GUIDE:
1 2 3 4




B1417W-WH Metal Stepped Baffle



BAFFLE:
W, P, SN, CP, BZ

TRIM:
WH, BK, SN, CP, CH,
PB, BZ

HOUSING COMPATIBILITY GUIDE:
1 2 3 4




B1477CL-WH Crossblade Reflector



REFLECTOR:
CL

TRIM:
WH, BK, SN, CP, CH,
PB, BZ

HOUSING COMPATIBILITY GUIDE:
1 2 3 4



ALL TRIMS ABOVE MIGHT BE SUBJECT TO PATENT

GUIDE	HOUSING COMPATIBILITY	MAX. LAMP WATTAGE
1	BL4IC, BL4, BL4R	50W 12V MR16
2	BL4IC-S, BL4OICE-S, BL4E-S, BL4RE-S	35W 12V MR16
3	BL4-75, BL4R-75	75W 12V MR16
4	G4IC, G4, G4R	50W 120V GU10



MR16 LENS FILTER

BP8MR16-BL BLUE
BP8MR16-GR GREEN
BP8MR16-PI PINK
BP8MR16-PU PURPLE
BP8MR16-DL DAY LIGHT

BP8MR16-YE YELLOW
BP8MR16-AM AMBER
BP8MR16-OR ORANGE
BP8MR16-RE RED



CAT.

1. BP8MR16-FR
2. BP8MR16-SP
3. BP8MR16-SF
4. BP8MR16-HC

TYPE

FROSTED
SPREAD
SOFT FOCUS
HONEY COMB

CAT.

5. BP8MR16-LI
6. BP8MR16-SOL
7. BP8MR16-CL
8. BP8MR16-UV

TYPE

LINEAR
SOLITE
CLEAR
ULTRAVIOLET


4" LOW VOLTAGE ADJUSTABLE TRIMS

B1406CP

Surface Adjustable (90° Tilt, 359° Rot.)





TRIM:
WH, BK, SN, CP, CH,
PB, BZ



HOUSING COMPATIBILITY GUIDE:
1 2 3

- Can take up to 2 optical accessories
- All die-cast construction is for functional and aesthetic use
- Used to accentuate an artwork or a particular object
- Relamps from the front

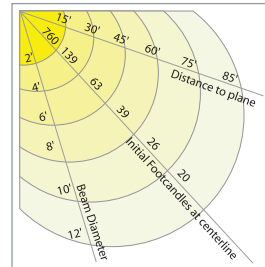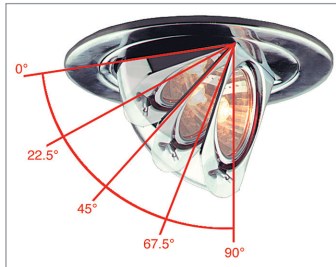


B1408WH

Fully Adjustable (75° Tilt, 359° Rot.)



TRIM:
WH, BK, SN, CP, CH,
PB, BZ




HOUSING COMPATIBILITY GUIDE:
1 2 3

B1412CH

Fully Adjustable (35° Tilt, 359° Rot.)



TRIM:
WH, BK, SN, CP, CH,
PB, BZ




HOUSING COMPATIBILITY GUIDE:
1 2 3 4

B1468W-WH

Fully Adj. w/ Baffle (35° Tilt, 359° Rot.)



AVAILABLE COLOR COMBINATIONS:
W-WH, P-WH, P-BK,
CP-CP, SN-SN, BZ-BZ




HOUSING COMPATIBILITY GUIDE:
1 2 3 4

B1461SN

Adjustable Gimbal (40° Tilt)



TRIM:
WH, BK, SN, CP, CH,
PB, BZ




HOUSING COMPATIBILITY GUIDE:
1 2 3 4

B1418P-WH

Adjustable Pinhole w/ Baffle (35° Tilt)



AVAILABLE COLOR COMBINATIONS:
W-WH, P-WH, P-BK,
P-PB




HOUSING COMPATIBILITY GUIDE:
1 2 3 4

B1419BK

Adjustable Spot (40° Tilt)



TRIM:
WH, BK, SN, CP, CH,
PB, BZ




HOUSING COMPATIBILITY GUIDE:
1 2 3 4

B1433P-WH

Adjustable Pinhole Baffle (15° Tilt)



AVAILABLE COLOR COMBINATIONS:
W-WH, P-WH



HOUSING COMPATIBILITY GUIDE:
1 2 3 4

GUIDE	HOUSING COMPATIBILITY	MAX. LAMP WATTAGE
1	BL4IC, BL4, BL4R	50W 12V MR16
2	BL4IC-S, BL40ICE-S, BL4E-S, BL4RE-S	35W 12V MR16
3	BL4-75, BL4R-75	75W 12V MR16
4	G4IC, G4, G4R	50W 120V GU10

ALL TRIMS ABOVE MIGHT BE SUBJECT TO PATENT



MR16 LENS FILTER
BP8MR16-BL BLUE
BP8MR16-GR GREEN
BP8MR16-PI PINK
BP8MR16-PU PURPLE
BP8MR16-DL DAY LIGHT

BP8MR16-YE YELLOW
BP8MR16-AM AMBER
BP8MR16-OR ORANGE
BP8MR16-RE RED



CAT. #
1. BP8MR16-FR
2. BP8MR16-SP
3. BP8MR16-SF
4. BP8MR16-HC

TYPE
FROSTED
SPREAD
SOFT FOCUS
HONEY COMB

CAT. #
5. BP8MR16-LI
6. BP8MR16-SOL
7. BP8MR16-CL
8. BP8MR16-UV

TYPE
LINEAR
SOLITE
CLEAR
ULTRAVIOLET

BAFFLE FINISH:
W White
P Black
SN Satin Nickel
CP Copper
BZ Bronze

REFLECTOR FINISH:
CL Chrome
RG Gold
W White
MB Black

BZ Bronze
CP Copper
SN Satin Nickel
SHZ Satin Haze

RING/TRIM FINISH:
WH White
BK Black
SN Satin Nickel
CP Copper

CH Chrome
PB Polish Brass
BZ Bronze

