



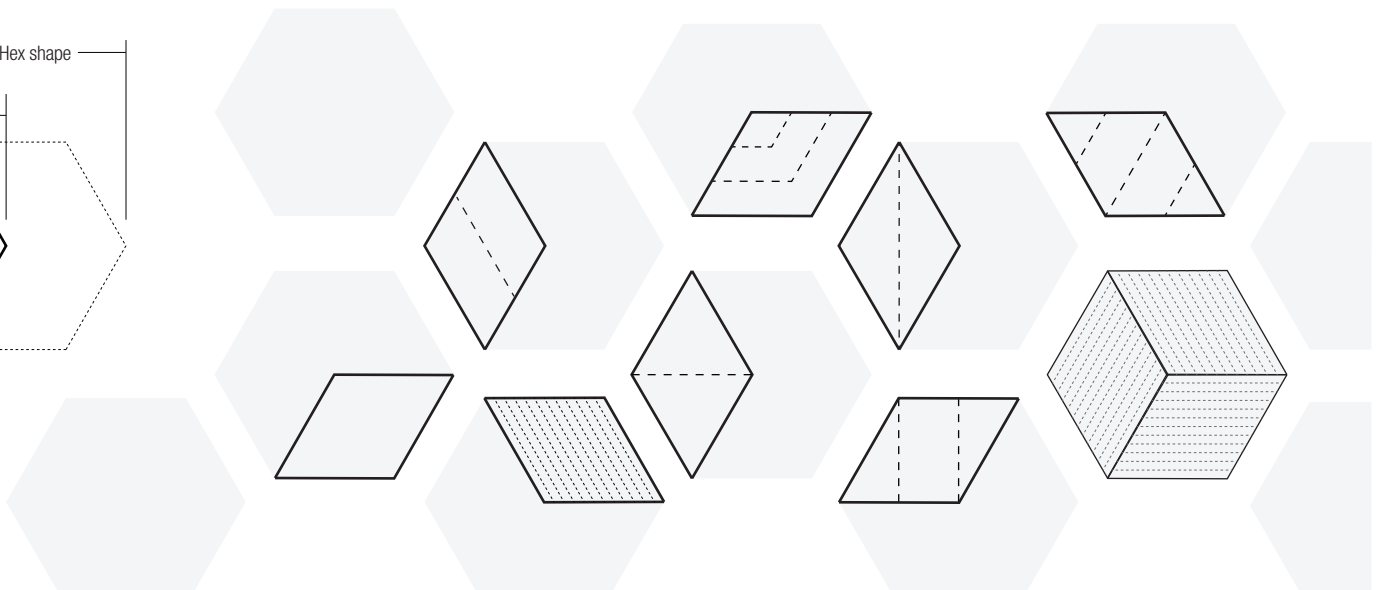


Détaché are acoustic wall tiles. Place them on any surface to reduce the reverberation rate. Perfect for open-concept spaces to minimize distractions, increase focus, and bring a peace for everyone.

These diamonds are available in a large variety of colors and can be carved with simple patterns, giving you the freedom to mix and match these tiles in endless variations to create a design that suits your space.



Example: **DÉTACHÉ-SOFT-DIA1-6IN-GRN**

<b>DÉTACHÉ-SOFT</b>				
<b>SERIES</b> DÉTACHÉ-SOFT SoftSense Wall Tiles	<b>STYLE</b> DIA1 - Diamond 1 DIA2 - Diamond 2 DIA3 - Diamond 3 DIA4 - Diamond 4 DIA5 - Diamond 5 DIA6 - Diamond 6 DIA7 - Diamond 7	<b>SIZE</b> 6IN - 6 inches 10IN - 10 inches CUS - custom size <sup>1</sup>	<b>COLOR</b> reference SoftSense material color chart example: GRN - Green	<b>EXTRAS</b> ADH - adhesive backing

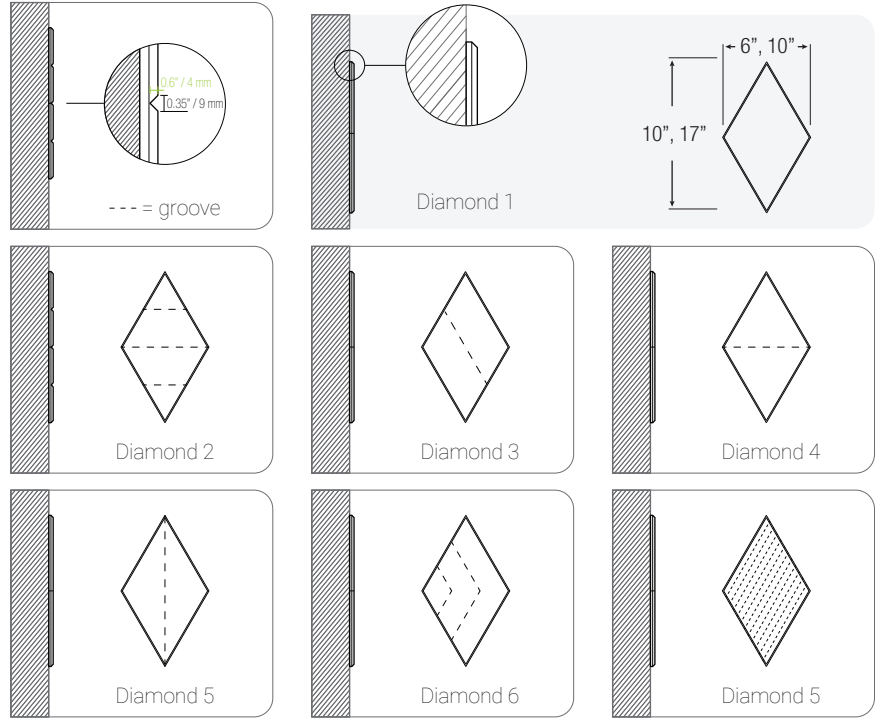


<sup>1</sup> please consult factory

**ACOUSTIC PANEL PERFORMANCE - 4' x 8' Panels**

Acoustic performance of specific fixture / product will greatly vary based on mounting, installation, and configuration in a space.

Noise Reduction Coefficient (NRC) - 0.75  
Weighted Sound Absorption Coefficient -  $a_w = 0.85$

NRC is a widely used standard to test sound absorption for 2-dimensional objects. It is the average absorption coefficient obtained from four key 1/3 octave frequencies: 250, 500, 1000, 2000 Hz.

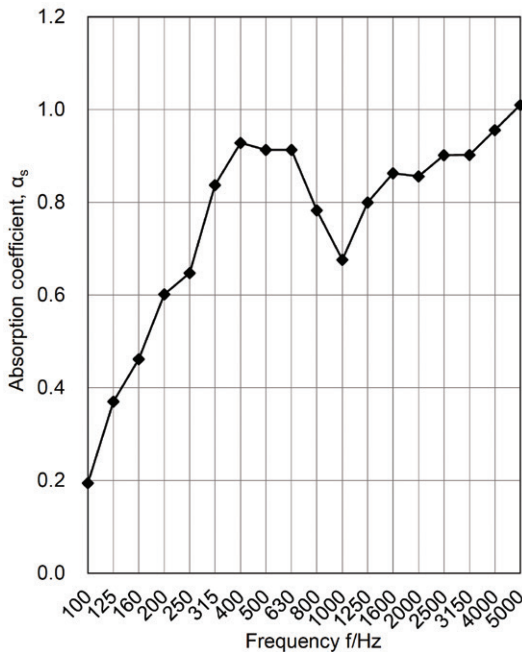

**ACOUSTIC MATERIAL - 9mm / 0.35" Thickness**

Our panels come in 4' x 8' and are made from 100% polyethylene terephthalate (PET), with 50% post-consumer recycled material. PET is a moisture resistant green product with no added chemicals, binders, adhesives or dyes.

**MAINTENANCE / CARE**

Acoustic material can be cleaned with a clean, soft, lint-free cloth or a vacuum.

**WARRANTY**

Limited 5-year Warranty. Please consult factory.

**LISTINGS**

ASTM E-84 Fire Rated  
SCS Recycled Content Certified

**PRODUCT SPECIFICS**

exact size - 6IN = 152.4 mm x 263.965 mm  
exact size - 10IN = 250 mm x 433 mm  
weight < 1lbs per tile

**MINI GUIDE / ADVICE**

Consider the dimensions of your space and the direction in which you would like to place this product. *One side has a larger measurement than the other.*

How would you prefer to mount this product? This product can be ordered with our adhesive backing or without if you wish to provide your own mounting method. You may use any type of adhesive that is appropriate for your space. You may also nail these to the surface that they will be applied to.

We advise ordering a few extras as back-up incase of any accidents and to cover any potentially exposed corners / edges.

**Recommended Field Cutting Method:**

**materials: cutting board, precision blade, metal ruler**

- place product on cutting board and align ruler to where you need to cut
- do not try to force the blade to cut all the way through on the first cut
- you should be cutting through on the 2nd or 3rd cut



**SOFTSENSE MATERIAL COLOR CHART**

Panel Thickness: 9 mm / 0.35" (+/- 0.5 mm)

**ASTM E84-16 Fire Rated\***



**Declare.  
Label Pending**

**Natural Print Patterns**

Thickness: 8.5 mm / 0.33" (+/- 0.5 mm)



\*quick ship available for any color depending on order quantity. Please consult factory.  
\*all colors are ASTM E84-16 fire rated, select colors are available as Class A