





Détaché are acoustic wall tiles which can be placed on any surface to reduce a space's reverberation rate. Perfect for minimizing distractions and increasing focus in open-concept spaces.

"SQUARE" tiles are 2D squares available in 12" and 24" sizes that can be mixed and matched into sound absorbing geometric patterns. Available in an array of colors including natural wood and marble patterns to suit various styles and concepts. Custom carvings available along with our 8 standard designs.

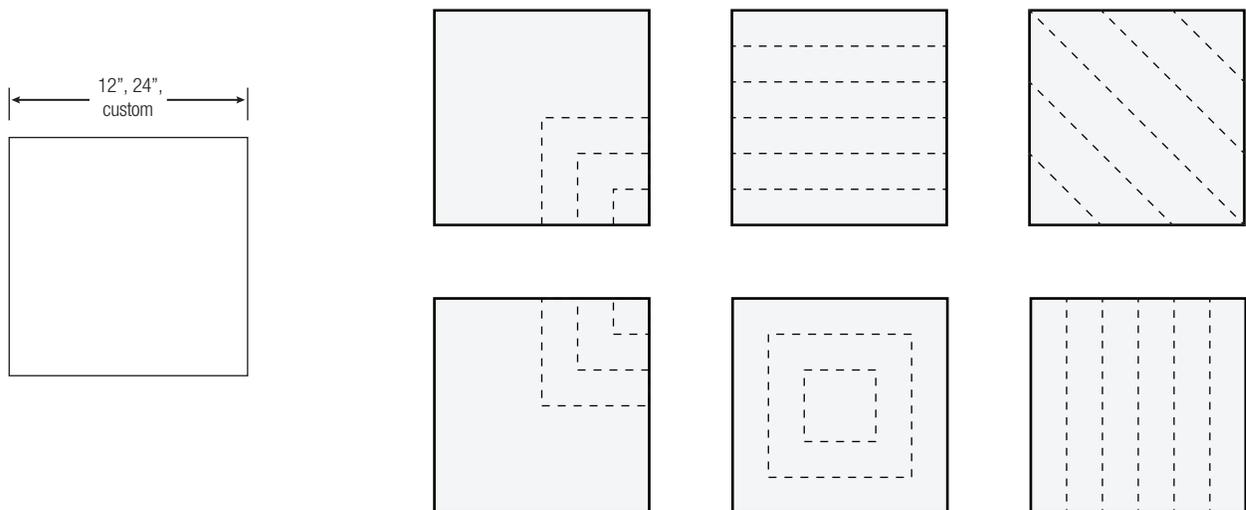

Example: DÉTACHÉ-SOFT-SQR1-24IN-GRN

SERIES	STYLE	SIZE	DEPTH	COLOR
DÉTACHÉ-SOFT SoftSense Wall Tiles	SQR1 - Square 1 SQR2 - Square 2 SQR3 - Square 3 SQR4 - Square 4 SQR5 - Square 5 SQR6 - Square 6 SQR7 - Square 7	24IN - 24 inches XXIN - custom ¹	[BLANK] - standard / no depth D1 - 1 inch ¹ D2 - 2 inches ^{1,2} DX - custom ^{1,2} <small>please consult factory for depth options</small>	reference SoftSense material color chart example: GRN - Green ³

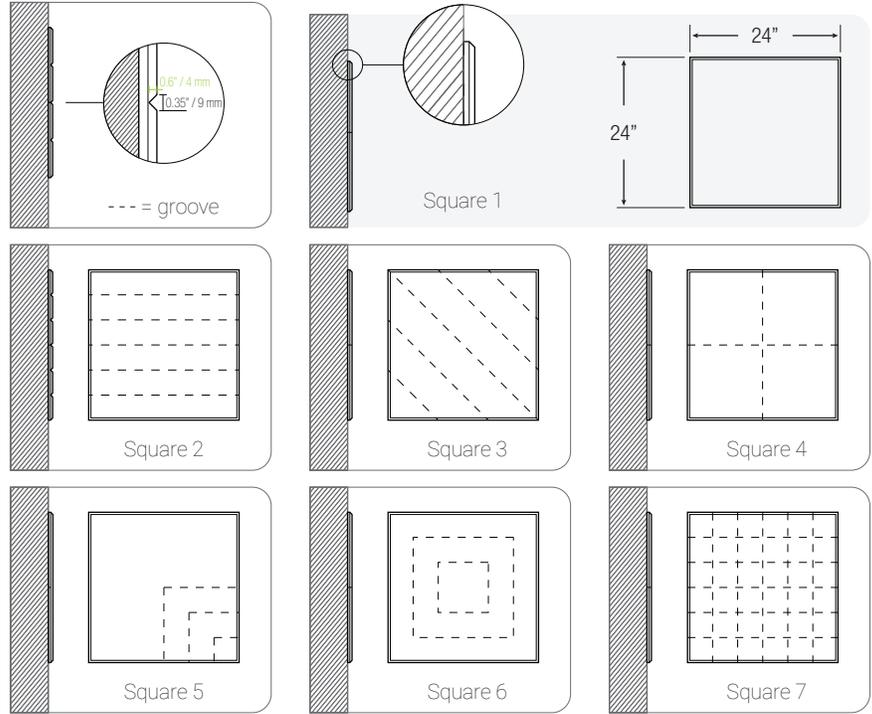

¹ please consult factory

² replace "X" with custom amount in inches - ex: D3 = 3 inches, D2.5 = 2.5 inches

³ For printed panel options, note that any grooves or cuts will expose the base panel color, as printing is applied only to the surface layer.


ACOUSTIC PANEL PERFORMANCE - 4' x 8' Panels

Acoustic performance of specific fixture / product will greatly vary based on mounting, installation, and configuration in a space.

Noise Reduction Coefficient (NRC) - 0.75

Weighted Sound Absorption Coefficient - $a_w = 0.85$

NRC is a widely used standard to test sound absorption for 2-dimensional objects. It is the average absorption coefficient obtained from four key 1/3 octave frequencies: 250, 500, 1000, 2000 Hz.

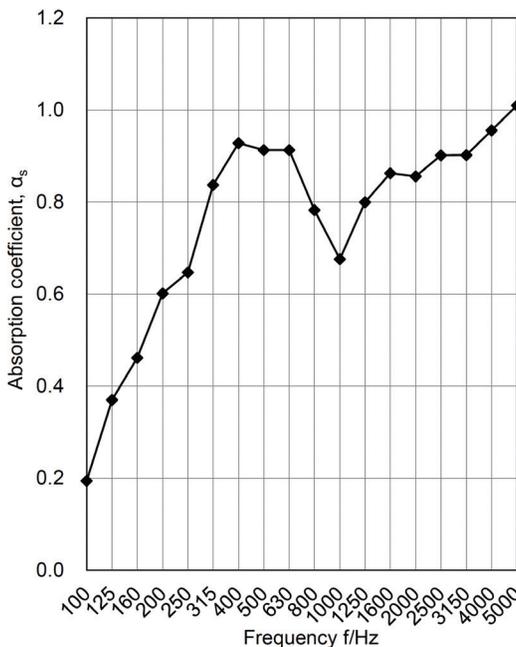

ACOUSTIC MATERIAL - 9mm / 0.35" Thickness

Our panels come in 4' x 8' and are made from 100% polyethylene terephthalate (PET), with 50% post-consumer recycled material. PET is a moisture resistant green product with no added chemicals, binders, adhesives or dyes.

MAINTENANCE / CARE

Acoustic material can be cleaned with a clean, soft, lint-free cloth or a vacuum.

WARRANTY

5-year warranty for parts and components (labor not included).

LISTINGS

ASTM E-84 Fire Rated
SCS Recycled Content Certified

PRODUCT SPECIFICS

exact size - 24IN = 600 mm x 600 mm
weight < 1lbs per tile

ADVICE - how would you prefer to mount this product?

For best acoustic results and pattern making, consider the dimensions of your space, placement direction, and even the type of surface you would like to place this product on.

You may use any type of adhesive that is appropriate for your space. Recommended choice would be Liquid Nails. You may also use physical nails to mount these to the surface that they will be applied to.

Ordering back-up quantities is advised in case of accidents and to help cover exposed corners or edges.

Recommended Field Cutting Method:

materials: **cutting board, precision blade, metal ruler**

- Place product on cutting board and align ruler to where you need to cut
- Do not try to force the blade to cut all the way through on the first cut, you should be cutting through on the 2nd or 3rd cut

STANDARD COLORS

Panel Thickness: 9 mm / 0.35" (+/- 0.25 mm)



All panels ASTM E84-16 Fire Rated

STANDARD PRINTS

Panel Thickness: 8.5 mm / 0.34" (+/- 0.5 mm)



prints shown at 12% scale

Declare.
Label Pending



quick ship available for any color depending on order quantity
*all colors are ASTM E84-16 fire rated, select colors are available as Class A