




EASY 3 COLORS
SELECCTOR
3000K • 3500K • 4000K



DIMENSIONS

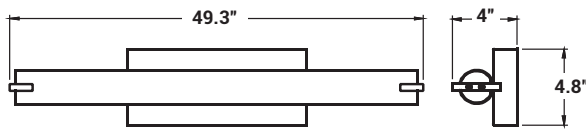

NOMINAL LUMENS	DELIVERED LUMENS	WATTAGE
3200L	3200L	36W

Based on 4000K, 80+ CRI. Actual wattage may vary +/- 5%



VERTICAL MOUNTING

FEATURES

ELEGANT ILLUMINATION FOR RELAXED SPACES

This 4 ft vanity light emits a gentle, diffused illumination and features a low, contemporary profile that seamlessly fits into modern design trends. Three selectable CCT options allow for an effortless variety of ambient settings, while a durable, light weight construction and high efficiency LEDs allow for extended lifetime and easy installation. Ideal for hotel, spa, and residential bathroom and vanity spaces. Damp location suitable.

LUMENS	3200L
WATTAGE	30K/35K/40K
CRI	80
COLOR QUALITY	3-Step MacAdam Ellipse
MOUNTING	Surface Mount
FINISH	Satin Nickel (SN)
WORKING TEMP.	-20°C (-4°F) to 40°C (105°F)
LIFETIME	L70 at 50,000 Hours
PHOTOMETRIC	In accordance with IES LM79-08, LM80 and TM-30, TM-21



OPTICS

Opaque lens made from high transmission acrylic for a uniform, gentle light distribution free of dark spots.

Made with high efficiency LEDs, binned and arranged to maximize uniformity and allow for a high CRI.

Available in 3200L, with 3 selectable CCT options of 30K/35K/40K for versatile warm tone illumination.

CONSTRUCTION

Base body built from a lightweight and durable die-formed cold rolled steel for a detailed profile and superior surface finish ideal for aesthetic applications.

Features two steel decorative end cap adornments and a square base with integrated driver inside.

Multi-CCT switch located inside body, across from driver.

MOUNTING

Suitable for surface mounting via integrated mounting bracket and provided screws. Can be installed vertically or horizontally.

MAINTENANCE

Luminaire can be wiped down with a dry cloth for optimal performance. A retractable sleeve LED tray can be easily pulled out for maintenance.

DRIVER & ELECTRICAL INFORMATION

Powered by high-quality constant-current LED drivers which are rated for 50 to 60Hz at 120-277V input, produce less than 20% THD, and have a power factor of .90 to 1.00.

WARRANTY

5-year warranty for parts and components (labor not included).

LISTINGS

UL and cUL listed.
ETL and cETL listed.
Energy Star compliant.
Damp location suitable.

Example: **ECH-FL5554D-MCT-3200L-MVOLT-30K/35K/40K-SN**

ECH-FL-5554D-MCT				
SERIES	LUMENS	VOLTAGE	CCT	FINISH
ECH-FL5554D-MCT	3200L	MVOLT	30K/35K/40K	SN - Satin Nickel