

ELM-820

Emergency Lighting Unit Wet Location

Architectural

Catalog Number:

Project Name:

Type:

Note:

MAXILUME
ARCHITECTURAL LIGHTING



FEATURES

This enclosed fixture is ideal for wet locations, resistant to corrosive atmospheres, non-hazardous dust environments, water spray or splashing water. In cases of AC power loss, it provides a minimum of 90 minutes illumination. A trouble-free lead-calcium battery is provided with the fixture. The lamp heads may be adjusted through the full range of motion because of the special swivel-track design.

BODY

- The thermoplastic housing of the product makes it corrosion-proof and scratch-and impact-resistant.
- UV-stabilization prevents discoloration of the product.
- Compartment shaped by injection.
- Power may be supplied via wall mount.

ELECTRICAL

- 120V or 277V input
- Reset is automatic
- Hassle-free wiring without the need for additional hardware

LAMPS

- Two 8 watt Sealed AC ready lights
- Emergency Light Fixtures: Two moveable glare free light heads that have a positioning lock. Two PAR36 lamps included.

BATTERY


- Indicator light shows high charge and readiness for operation
- 6V, 4 amp-hour sealed-lead acid battery works during power failures
- Replaceable and requires no maintenance
- When completely charged, supplies emergency power for 90 minutes.

TESTING

- Solid state line latched low voltage disconnect to avoid deep discharge
- Safeguarded against short circuits
- Power is automatically interrupted in cases of brown-out
- Sealed momentary test switch

LISTED

- UL 924, NFPA, NEC, State & Municipal
- Wet location

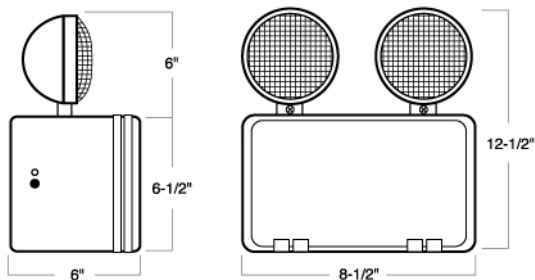

FOR
WET
LOCATION



MAXILUME
ARCHITECTURAL LIGHTING

A division of
Elite Lighting

Submittal form is available @ www.maxilume.com
Tel: 323-888-1973 • Fax: 323-888-1977

Specifications and Dimensions
subject to change without notice.

REV: MAXILUME-SPEC-03-10-2011