

ELM-851

Architecture Emergency Lighting

Architectural

Catalog Number:

Project Name:

Type:

Note:

MAXILUME
ARCHITECTURAL LIGHTING



FEATURES

This fixture is an excellent choice when an attractive emergency light is required. In cases of AC power loss, it provides a minimum of 120 minutes illumination. A trouble-free lead-calcium battery is provided with the fixture. The lamp heads may be adjusted through the full range of motion because of the special swivel-track design.

BODY

- Injection-molded thermoplastic ABS housing
- UL 94V-0 flame rating
- Innovative, snap-together design allows for fast and easy installation
- Two fully adjustable glare-free eyeball shape light heads for emergency light

FACE

- Beveled injection molded face with two round lamp heads molded into sloped side surfaces of fixture. Each head holds a 5 watt Halogen covered MR16 lamp.

MOUNTING

- Wall or ceiling mounting.
- Easily removed mounting knock-outs and j-box pattern on back panel

ELECTRICAL

- 120V or 277V VAC Dual voltage operation
- Test switch and charge rate indicator

LAMPS

- Beveled face with (2) 5 Watt Halogen MR16 lamp heads

BATTERY


- Sealed-lead acid battery (6V 5A) delivers more than 90 minutes capacity to emergency lamps.
- 24 hours recharge after 90 mins. discharge.
- Low voltage battery disconnection-preventing deep discharge damage to the battery.

TESTING

- Test Button
- Solid state line latched low voltage disconnect to avoid deep discharge
- Safeguarded against short circuits
- Power is automatically interrupted in cases of brown-out

LISTED

- Damp location approved

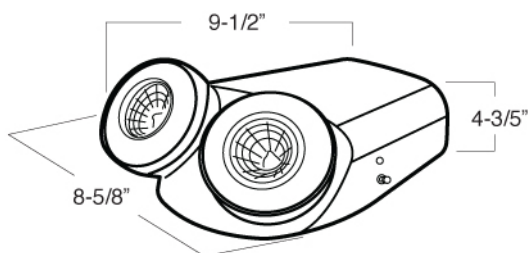

ELM-851 - ITEM SELECTOR: (Please check the boxes below for the option desired)

HOUSING COLOR

- ☐ **W** - White
- ☐ **B** - Black

Specified:

ELM-851

HOUSING COLOR



MAXILUME
ARCHITECTURAL LIGHTING

A division of
Elite Lighting

Submittal form is available @ www.maxilume.com
Tel: 323-888-1973 • Fax: 323-888-1977

Specifications and Dimensions
subject to change without notice.

REV: MAXILUME-SPEC-03-10-2011