

ELM-902

Chicago Approved Steel LED Emergency Unit
(Remote Capable of 5.4W)

Architectural Emergency Unit

Catalog Number:

Project Name:

Note:

Type:



ILLUMINATION

- Two, 6V, 5.3W adjustable white LED lamp heads..

ELECTRICAL

- Dual 120/277 voltage.
- Charge rate/power "ON" LED indicator light and push-to-test switch for mandated code compliance testing.
- LVD (low voltage disconnect) prevents battery from deep discharge.
- 6V sealed lead acid, maintenance-free, rechargeable battery.
- Internal solid-state transfer switch automatically connects the internal battery to the LED lamp heads for minimum 120-minute emergency illumination.
- Fully automatic solid-state, two rate charger initiates battery charging to recharge a discharged battery in 24 hours.
- Remote capacity of 5.4 watts.

MOUNTING


- Knockouts on the back for wall mount.
- Side and top knockouts for conduit feed applications.

HOUSING

- Durable 20-gauge steel construction.
- White or black finish.

WARRANTY/LISTING

- Five year warranty on all electronics and housing. Battery prorated for five years.
- UL listed for damp locations (0°-50°C/32°F-122°F standard).
- Meets UL924, NFPA101 Life Safety Code, NEC, OSHA, Local and State Codes.
- Meets city of Chicago requirements.

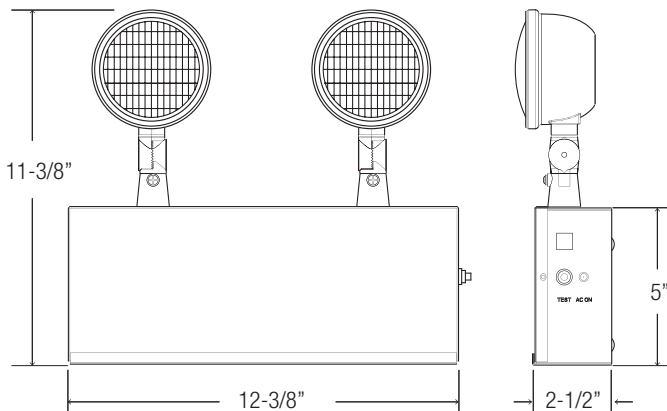

ELM-902

Chicago Approved Steel LED Emergency Unit

HOUSING	HOUSING COLOR
ELM-902	<input type="checkbox"/> W - White <input type="checkbox"/> B - Black