

ELM-905

Chicago Approved Steel Recessed Emergency Unit **(Remote Capable on 50W Model)**

Architectural Emergency Unit

Catalog Number:

Project Name:

Note:

Type:



ILLUMINATION

- Two, 6V/12V 12W adjustable bi-pin halogen lamp heads.

ELECTRICAL

- Dual 120V/277 voltage.
- Charge rate/power "ON" LED indicator light and push-to-test switch for mandated code compliance testing.
- LVD (low voltage disconnect) prevents battery from deep discharge.
- 6V sealed lead acid, maintenance-free, rechargeable battery.
- Internal solid-state transfer switch automatically connects the internal battery to lamp heads for minimum 120-minute emergency illumination.
- Fully automatic solid-state, two rate charger initiates battery charging to recharge a discharged battery in 24 hours.
- Remote capacity of 26W standard on 50W models.

MOUNTING


- Conveniently designed for use with T-bar grid ceilings.
- Holes provided on enclosure for wire-suspension mount.

HOUSING

- Durable 20-gauge steel construction.
- White or black finish.

WARRANTY/LISTING

- Five year warranty on all electronics and housing. Battery prorated for five years.
- UL listed for damp locations (0°-50°C/32°F-122°F standard).
- Meets UL924, NFPA101 Life Safety Code, NEC, OSHA, Local and State Codes.
- Meets city of Chicago requirements.

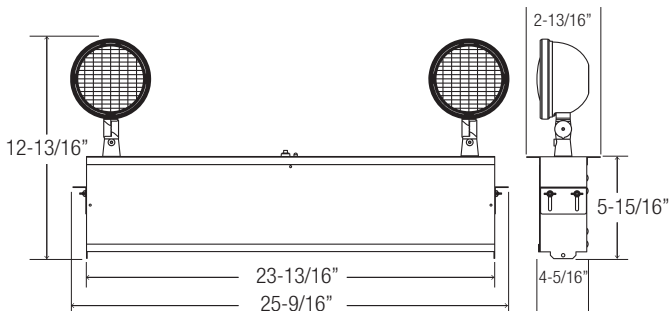

ELM-905

Chicago Approved Steel Recessed Emergency Unit

HOUSING COLOR	VOLTAGE	WATTAGE (for 90 mins)	WATTAGE FOR REMOTE APPLICATION
<input type="checkbox"/> W - White <input type="checkbox"/> B - Black	<input type="checkbox"/> 6 - 6V <input type="checkbox"/> 12 - 12V	27 - 27W 50 - 50W	26W (for 50W model only)