

# ELM-914

Chicago Approved Steel Emergency Unit  
(Remote Capable)

## Architectural Emergency Unit

Catalog Number:

Project Name:

Note:

Type:



### ILLUMINATION

- Two, 6V/12V adjustable bi-pin halogen lamp heads.

### ELECTRICAL

- Dual 120V/277 voltage.
- Charge rate/power "ON" LED indicator light and push-to-test switch for mandated code compliance testing.
- LVD (low voltage disconnect) prevents battery from deep discharge.
- 6V Sealed lead acid, maintenance-free, rechargeable battery.
- Internal solid-state transfer switch automatically connects the internal battery to lamp heads for minimum 120-minute emergency illumination.
- Fully automatic solid-state, two rate charger initiates battery charging to recharge a discharged battery in 24 hours.
- Remote capacity of 26W on 50W model respectively.

### MOUNTING


- Knockouts on the back for wall mount.
- Side and top knockouts for conduit feed applications.

### HOUSING

- Durable 20-gauge steel construction.
- Neutral white or black finish.

### WARRANTY/LISTING

- Five year warranty on all electronics and housing. Battery prorated for five years.
- UL listed for damp locations (0°-50°C/32°F-122°F standard).
- Meets UL924, NFPA101 Life Safety Code, NEC, OSHA, Local and State Codes.
- Meets city of Chicago requirements.

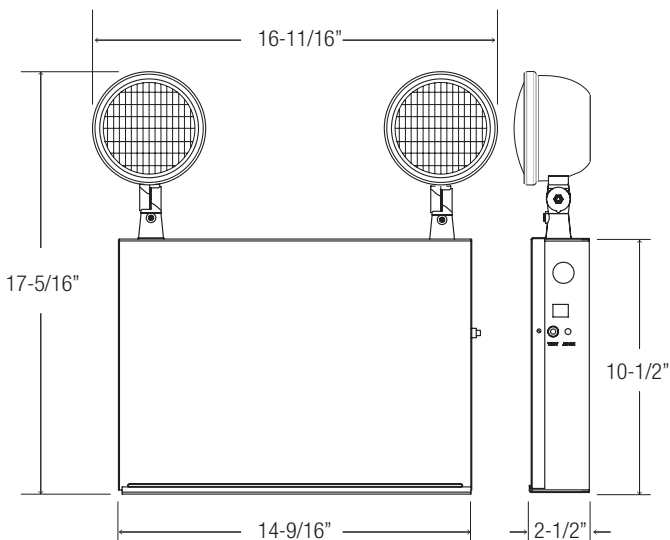

## ELM-914

Chicago Approved Steel Emergency Unit

HOUSING COLOR	VOLTAGE	WATTS (FOR 90-MINS.)	WATTAGE FOR REMOTE APPLICATION
<input type="checkbox"/> W - White <input type="checkbox"/> B - Black	6 - 6V	5 - 50W	26W