

# ELM-LED-806

## Beveled Integral Dual Head Emergency Light

Catalog Number:

Project Name:

Type:

Note:

**MAXILUME**  
ARCHITECTURAL LIGHTING

Architectural



### ILLUMINATION

- Long life, efficient, ultra bright white LED lamp heads.
- Two fixed, 2.0 watt LED lamp heads.
- High performance, chrome-plated metallized reflector and plastic lens for optimal light distribution.

### ELECTRICAL

- Dual 120/277 voltage.
- Charge rate/power "ON" LED indicator light and push-to-test switch for mandated code compliance testing.
- 3.6V long life, maintenance-free, rechargeable NiCd battery.
- Internal solid-state transfer switch automatically connects the internal battery to LED lamp heads for minimum 90-minute emergency illumination
- Fully automatic solid-state, two rate charger initiates battery charging to recharge a discharged battery in 24 hours.

### MOUNTING

- Universal knockout pattern on back plate for surface mount. Snaps into place making internal electrical connections.
- Suitable for wall or ceiling mount.

### HOUSING


- Injection-molded, engineering grade, 5VA flame retardant, high-impact resistant, thermoplastic in white or black finish.

### WARRANTY

- Five year warranty on all electronics and housing. Battery prorated for five years.

### LISTING

- Meets UL924, cULus, NFPA 101 Life Safety Code, NEC, OSHA, Local and State Codes.
- CSA Listed to UL 924 standards for damp locations (0°C – 40°C).

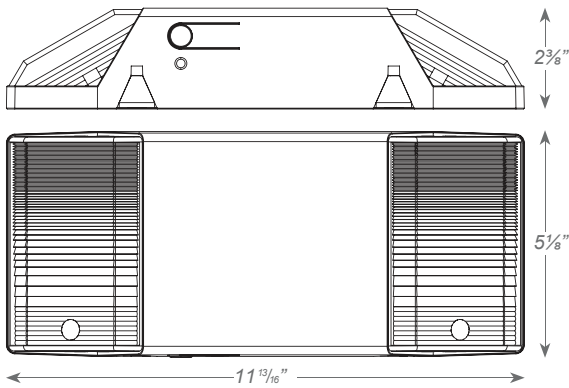

ELM-LED-806 - ITEM SELECTOR: (Please check the boxes below for the option desired)

HOUSING COLOR	CANOPY
<input type="checkbox"/> W - White	UNIVERSAL MOUNT TO WALL OR CEILING
<input type="checkbox"/> B - Black	



Specified:

ELM-LED-806

HOUSING COLOR

**MAXILUME**  
ARCHITECTURAL LIGHTING

A division of  
**Elite Lighting**

Submittal form is available @ [www.maxilume.com](http://www.maxilume.com)  
Tel: 323-888-1973 • Fax: 323-888-1977

Specifications and Dimensions  
subject to change without notice.

REV: MAXILUME-SPEC-03-10-2011