

ELM-LED-809

LED Emergency Light

Catalog Number:

Project Name:


Type:

Note:

MAXILUME
ARCHITECTURAL LIGHTING

Emergency

NEW

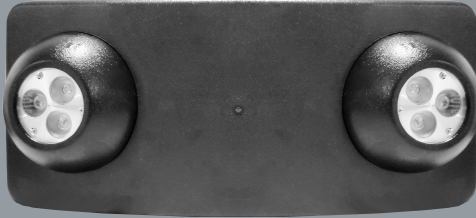

FEATURES

This fixture is an excellent choice when an attractive emergency light is required. In cases of AC power loss, it provides a minimum of 90 minutes illumination. A Lead-Acid battery is provided with the fixture. The lamp heads may be adjusted through the full range of motion.

BODY

- Injection-molded thermoplastic ABS housing.
- UL 5VA flammable material.
- Two fully adjustable glare-free eyeball shape light heads for emergency light.
- Quick and easy snap-together design.

MOUNTING

- Wall mounting with conduit application.
- Easily removed mounting knock-outs and J-box pattern on back panel.

ELECTRICAL

- 120/277VAC dual voltage operation.
- 5W max. power consumption on float charging.
- Test switch and charge indicator.

LAMPS

- Use MR16 LED lamp, 4 - 12V DC input, 3.5W, beam angle 36 degree.

OPERATING TEMPERATURE

- Suitable for use in 10°C - 40°C ambient temperature, suitable for damp location.

BATTERY


- Lead-Acid Battery(6V 4.5Ah) delivers more than 90 minutes capacity to emergency lamps.
- 24 hours recharge after 90 minutes discharge.
- Low voltage battery disconnection Preventing deep discharge damage to the battery.

TESTING

- Test switch and charge indicator

LISTED

- Damp location approved
- UL and cUL listed and meets or exceed all requirement in NFPA 70, NFPA 101 life safety code, suitable for U.S.A and Canada market.

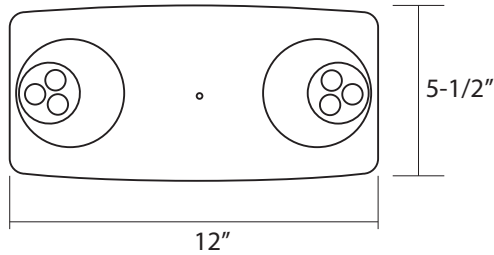

ELM-LED-809 - ITEM SELECTOR:

(Please check the boxes below for the option desired)

HOUSING COLOR

- W - White
- B - Black

Specified:

ELM-LED-809

HOUSING COLOR



MAXILUME
ARCHITECTURAL LIGHTING

A division of
Elite Lighting

Submittal form is available @ www.maxilume.com
Tel: 323-888-1973 • Fax: 323-888-1977

Specifications and Dimensions
subject to change without notice.

REV: MAXILUME-SPEC-10-16-2020