

ELM-LED-812

LED Emergency Light

Architectural

Catalog Number:

Project Name:

Type:

Note:

MAXILUME
ARCHITECTURAL LIGHTING



FEATURES

This fixture is an excellent choice when an attractive emergency light is required. In cases of AC power loss, it provides a minimum of 90 minutes illumination. A trouble-free lead-calcium battery is provided with the fixture. The lamp heads may be adjusted through the full range of motion because of the special swivel-track design.

BODY

- The thermoplastic housing of the product makes it corrosion-proof and scratch-and impact-resistant.
- UV-stabilization prevents discoloration of the product.
- Compartment shaped by injection.
- Power may be supplied via wall or ceiling

FACE

- Beveled injection molded face with two round lamp heads molded into sloped side surfaces of fixture. Each head holds a 7 watt LED covered MR16 lamp.

MOUNTING

- Unique "snap-together" universal mounting design permits top, back and side mounting. Necessary hardware and canopy are provided electrical

ELECTRICAL

- 120V or 277V input
- Reset is automatic
- Hassle-free wiring without the need for additional hardware

LAMPS

- Beveled face with (2) 7 Watt LED MR16 lamp heads

BATTERY


- Indicator light shows high charge and readiness for operation
- 6V, 4 amp-hour sealed-lead acid battery works during power failures
- Replaceable and requires no maintenance
- When completely charged, supplies emergency power for 90 minutes.

TESTING

- Test Button
- Solid state line latched low voltage disconnect to avoid deep discharge
- Safeguarded against short circuits
- Power is automatically interrupted in cases of brown-out

LISTED

- Damp location approved

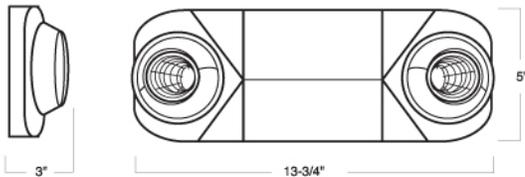

ELM-LED-812 - ITEM SELECTOR: (Please check the boxes below for the option desired)

HOUSING COLOR	CANOPY
<input type="checkbox"/> W - White	UNIVERSAL MOUNT TO WALL OR CEILING
<input type="checkbox"/> B - Black	

Specified:

ELM-LED-812

HOUSING COLOR



MAXILUME
ARCHITECTURAL LIGHTING

A division of
Elite Lighting

Submittal form is available @ www.maxilume.com
Tel: 323-888-1973 • Fax: 323-888-1977

Specifications and Dimensions
subject to change without notice.

REV: MAXILUME-SPEC-03-10-2011