

ELM-LED-813-WL

LED Emergency Light for wet location

Architectural


Catalog Number:

Project Name:

Type:

Note:

MAXILUME
ARCHITECTURAL LIGHTING

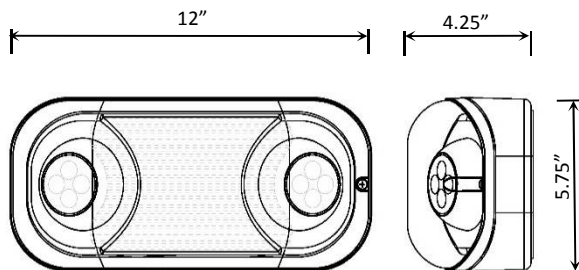

Housing

- Polycarbonate material and waterproof design suitable for wet location.
- Plastic enclosure with 5VA flame retardant and UV resistance, stainless steel screws for corrosion-resistant.
- Two fully adjustable round shape light heads for emergency light.

Electrical

- 120-277VAC 50/60Hz universal input.
- Lithium iron phosphate battery.
- 24 hours recharge after 90 minutes discharge.
- Test switch and charge indicator.

Illumination

- Three lumen output available, low lumen output, medium lumen output and high lumen output.

Mounting

- Suitable for wall mount and ceiling mount.

Options

- CT option with self-testing and self-diagnostics.
- RC option with remote capability.
- CL option for cold weather.

Listing

- Suitable for wet location, standard to 5°C-50°C. CL version with ta -20°C-50°C, for cold weather model.
- UL and cUL listed and meets or exceed all requirement in NFPA 70, NFPA 101 life safety code, suitable for U.S.A and Canada market.
- NEMA 4X rated.
- Comply CEC title 20 requirement.

ELM-LED-813-WL-W - ITEM SELECTOR: (Please check the boxes below for the option desired)

PART NUMBER

ELM-LED-813-WL-W



Specified:

ELM-LED-813-W

MAXILUME
ARCHITECTURAL LIGHTING

A division of
Elite Lighting

Submittal form is available @ www.maxilume.com
Tel: 323-888-1973 • Fax: 323-888-1977

Specifications and Dimensions
subject to change without notice.

REV: MAXILUME-SPEC-03-10-2011