

ELM-LED-823

LED NEMA 4X/NSF EMERGENCY UNIT
LED CLASS I DIVISION 2 EMERGENCY UNIT

Catalog Number:

Project Name:



Note:

Type:



MOUNTING

- NEMA 4X/NSF: Universal knockout pattern on back plate provided with gasket for watertight seal for wall mount.
- NEMA 4X/NSF: Knockouts provided for conduit feed applications.
- NEMA 4X-CLASS I DIVISION 2: Mounting brackets provided for surface wall mount.
- CLASS I DIVISION 2: Pre-installed conduit hub for conduit and pendant mount.

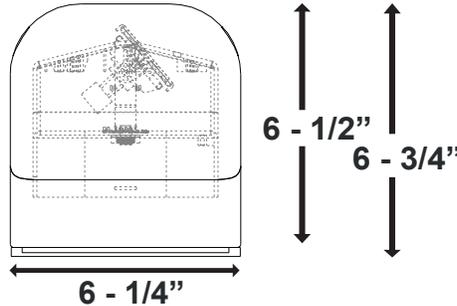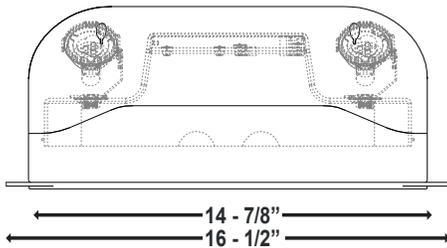

HOUSING

- NEMA 4X/NSF: Reinforced polycarbonate in white or black finish.
- CLASS I DIVISION 2: Fiberglass reinforced polycarbonate in gray finish.
- Corrosion-resistant enclosure with one piece, high-impact resistant, UV stabilized polycarbonate lens and molded gasket with stainless steel screws.

ELECTRICAL

- Dual 120/277 voltage.
- Unique bi-color LED indicator light alerts occupant on battery condition (Green-normal, Red-check battery).
- 6V/12V nickel cadmium battery, (15 watt models).
- NEMA 4X/NSF: 6V/12V sealed lead acid battery (36 watt models and 54 watt models).
- NEMA 4X/NSF: Remote capacity, standard for 6V/12V DC output, (7.8 watts in 15 watt model, 28.8 watts in 36 watt model and 46.8 watts in the 54 watt model).
- CLASS I DIVISION 2: Remote capacity standard for 6V/12V DC output, (7.8 watts).

ILLUMINATION

- Ultra-bright, energy efficient, long-life White LED adjustable lamp heads provide up to 45-ft center-to-center spacing.
- 3.6 watt (3 LEDs x 1.2 watt) per head.

ELM-LED-823-ITEM SELECTOR (Please check the boxes below for the option desired)

HOUSING COLOR	VOLTAGE	WATTAGE	OPTIONS
W - White ¹	6 - Volts	15 - Watts	SDT - Self-Diagnostics
B - Black ¹	12 - Volts	36 - Watts ¹	TP - Tamper Proof
G - Gray ²		54 - Watts ¹	CW - Cold Weather ³

¹ NOT Available with CLASS I DIVISION 2 models. ² NOT available with NEMA 4X/NSF models. ³ Available only in 15 watt models.

SPECIFIED:
ELM-LED-823 _____
HOUSING COLOR VOLTAGE WATTAGE OPTION