

ELM-LED-824

LED NEMA 4X/NSF EMERGENCY UNIT

LED CLASS I DIVISION 2 EMERGENCY UNIT

Catalog Number:

Project Name:


Note:

Type:




MOUNTING

- NEMA 4X/NSF: Universal knockout pattern on back plate provided with gasket for watertight seal for wall mount.
- NEMA 4X/NSF: Knockouts provided for conduit feed applications.
- NEMA 4X-CLASS I DIVISION 2: Mounting brackets provided for surface wall mount.
- CLASS I DIVISION 2: Pre-installed conduit hub for conduit and pendant mount.

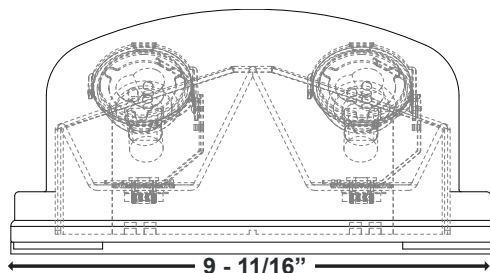

Note: Twin model shown.
Dimensions are the same for
single model.

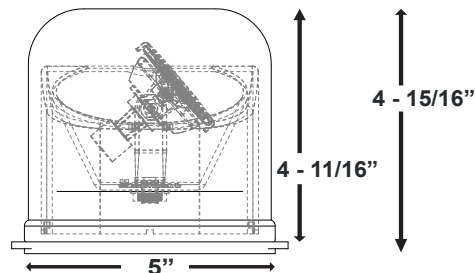

ELECTRICAL

- Powered from low voltage 6V/12V power source with low voltage wiring (not provided).

ILLUMINATION

- Ultra-bright, energy efficient, long-life White LED adjustable lamp heads provide up to 45-ft center-to-center spacing.
- 3.6 watt (3 LEDs x 1.2 watt) per head.

HOUSING

- NEMA 4X/NSF: Reinforced polycarbonate in white or black finish.
- CLASS I DIVISION 2: Fiberglass reinforced polycarbonate in gray finish.
- Corrosion-resistant enclosure with one piece, high-impact resistant, UV stabilized polycarbonate lens and molded gasket with stainless steel screws.

ELM-LED-824 ITEM SELECTOR

(Please check the boxes below for the option desired)

HOUSING COLOR	HEADS	OPTIONS
W - White ¹	1 - Single	TP - Tamper Proof
B - Black ¹	2 - Twin	
G - Gray ²		

¹ NOT Available with CLASS I DIVISION 2 models. ² NOT available with NEMA 4X/NSF models.

SPECIFIED:
ELM-LED-824 HOUSING COLOR - HEADS - OPTION