

ELM-LED-864

LED HAZARDOUS LOCATION REMOTE HEAD

Catalog Number:

Project Name:

Note:

Type:



OPTIONS

- TP: Tamper-proof hardware helps discourage unauthorized access to the unit.

ELECTRICAL

- Powered from low voltage 6V/12V DC power source with low voltage wiring (not provided).

MOUNTING

- Universal knockout pattern on back provided with gasket for watertight seal for back mount.
- Distance of maximum run is determined by system voltage, wire gauge, and total maximum wattage on the run.
- Suitable for wall or ceiling mount.

ILLUMINATION



- Two fully adjustable, ultra bright 3.3 watt high performance MR-16 base LED lamp heads for optimized center-to-center spacing.

HOUSING

- Housing is fiberglass reinforced polycarbonate construction in gray finish.
- Corrosion-resistant enclosure with one piece, high-impact resistant, UV stabilized polycarbonate lens and molded gasket with stainless steel screws.
- Knockout's provided for conduit feed applications.

WARRANTY / LISTING

- Five year warranty.
- UL listed with approved Best Lighting Products.
- IP66 rated for Ingress protection.
- Meets UL924, NFPA 101 Life Safety Code, NEC, OSHA, Local and State Codes.
- Rated for Class 1, Division 2, Groups A,B,C, & D.

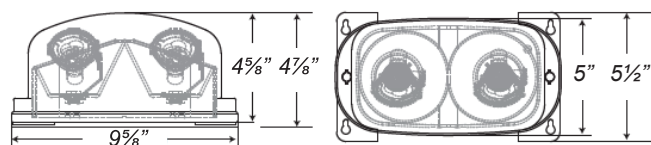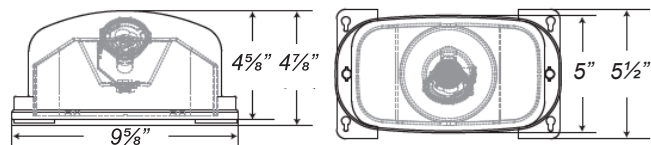

ELM-LED-864-ITEM SELECTOR: (Please check the boxes below for the option desired)

HOUSING COLOR	HEADS	OPTIONS
G - Gray	1 - Single 2 - Double	TP - Tamper-Proof

SPECIFIED:
ELM-LED-864

HOUSING COLOR

HEADS

OPTION

STANDARD



OPTIONAL

