


ELX-605 / ELX-505 / ELX-617 / ELX-518

LED Die-Cast Exit Sign

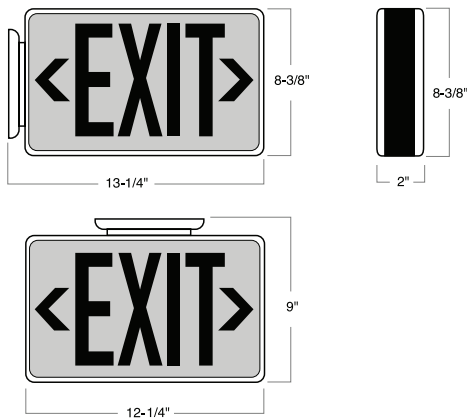

FEATURES

This fixture is ideal for applications that require energy efficiency and an attractive die-cast aluminum signage. The long-lasting LEDs in this product consume less than 3 Watts of energy and are rated for a life of up to 25 years without a drop in illumination. It provides a minimum 90 minutes of illumination during AC power loss and will automatically recharge after discharge.

BODY

- Molded from solid die-cast aluminum housing that makes it corrosion-proof and UV-stabilized to resist discoloration.
- The standard finish is brushed aluminum face with matte black housing.

FACE

- One face is supplied; extra ones are optional
- Letters are 6" and emit color in all directions
- Knockout directional chevrons

MOUNTING

- Unique "snap-together" universal mounting design permits top, back and side mounting. Necessary hardware and canopy are provided.
- The chevron directional indicator knockouts and mounting hardware are totally hidden from view.

ELECTRICAL

- Universal 120V or 277V dual input
- Consumes only 2 Watts of power
- LED light source
- Protected against short circuits and power surges

LISTED

- UL 924, NFPA, NEC, State & Municipal
- Damp location approved

AVAILABLE OPERATIONS:

ELX-605 - LED DIE-CAST EXIT SIGN W/ Self Diagnostic Battery Pack

- **Emergency Battery Back-Up** provides a minimum of 90 minutes illumination when AC power is lost.
- Ni-cad battery
- Minimum 90 minutes of illumination
- Solid-state charging circuitry
- Indicator light shows high charge and functional readiness
- Test button
- Automatic reset
- Short-circuit safeguard
- Brown-out prevention

ELX-505 - LED DIE-CAST EXIT SIGN W/ DUAL CIRCUIT

- **Dual Circuit** models have one source circuit to be powered with normal power source and a second circuit is to be powered by a generator or alternate source. Only one circuit shall be energized at a time.

ELX-617 - LED DIE-CAST EXIT SIGN W/ AC INPUT

- **AC Input** model offers a single circuit to be powered with main power source or back up source such as generator.

ELX-518 - LED DIE-CAST EXIT SIGN W/ SELF DIAGNOSTIC

- **Self Diagnostic** model automatically tests the overall performance of the unit every month and identifies problems with proper operation.

ITEM SELECTOR: (Please check the boxes below for the option desired)

CATALOG#	LETTER COLOR
<input type="checkbox"/> ELX-605 LED DIE-CAST EXIT SIGN W/ EMERGENCY BATTERY BACK-UP	<input type="checkbox"/> G - Green <input type="checkbox"/> R - Red
<input type="checkbox"/> ELX-505 LED DIE-CAST EXIT SIGN W/ DUAL CIRCUIT	<input type="checkbox"/> G - Green <input type="checkbox"/> R - Red
<input type="checkbox"/> ELX-617 LED DIE-CAST EXIT SIGN W/ AC INPUT	<input type="checkbox"/> G - Green <input type="checkbox"/> R - Red
*Only one circuit shall be energized at a time.	
<input type="checkbox"/> ELX-518 LED DIE-CAST EXIT SIGN W/ SELF DIAGNOSTIC	<input type="checkbox"/> G - Green <input type="checkbox"/> R - Red

ITEM SELECTOR: (Please check the boxes below for the option desired)

HOUSING COLOR	FACE COLOR	NO. OF FACES
<input type="checkbox"/> AL - Natural Aluminum	<input type="checkbox"/> AL - Natural Aluminum	<input type="checkbox"/> 1 - (1) Face
<input type="checkbox"/> W - White	<input type="checkbox"/> W - White	<input type="checkbox"/> 2 - (2) Faces
<input type="checkbox"/> B - Black	<input type="checkbox"/> B - Black	

SPECIFIED:

ELX- _____ - _____ - _____ - _____ - _____
 CATALOG NO. LETTER COLOR HOUSING COLOR FACE COLOR NO. OF FACES



EXIT SIGNS AND EMERGENCY LIGHTING