



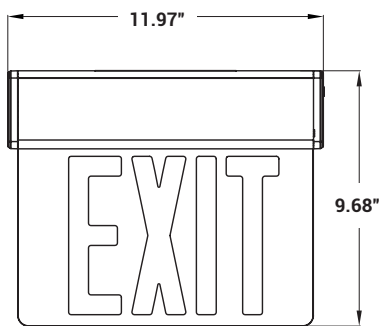










DIMENSIONS



MOUNTING OPTION



FEATURES

SAFE, SLIM, AND VERSATILE

This versatile LED exit sign satisfies convenience, aesthetics, and safety compliance. It features a slim profile for high-end architectural applications, red or green color options, and universal mounting. An integrated emergency battery back-up with a 90-minute discharge ensures safe illumination in the event of AC power failure. Ideal for marking exits and paths of egress across a variety of settings, including schools, offices, hospitals, retail and public spaces. Indoor damp location suitable and rated for a lifetime of up to 25 years without drops in illumination.

WATTAGE	5W
COLOR	Green (G), Red (R)
FACE	Double or Single Face
MOUNTING	"Universal": Ceiling Mount, Side Mount, and Wall Mount
FINISH	AL (Aluminum), Black (B), White (W)
AMBIENT TEMP.	10°C (50°F) to 40°C (104°F)
EMERGENCY	Ni-cad Battery (Self-Diagnostic Test Switch)
VOLTAGE	120/277VAC Input
WARRANTY	5-year



FACE

Features compact, slim, and decorative edge-lit acrylic panels with a 6" height and 3/4" lettering stroke, and removable chevron directional arrows. Light powered by 8 highly efficient LEDs with a rated life of up to 25 years, with no drop in illumination.

Face panels removable for storage or maintenance.

Available with single or double faced panel options.

Face panels available in clear, mirror, or white finish.

CONSTRUCTION

Fixture body consists of injection-molded acrylic panels supported by a small extruded, 2-piece aluminum frame. Frame contains PC board, LED source, and upper acrylic face end.

Designed with a removable front cover for easy installation and maintenance.

Self-diagnostic test switch and indicator for emergency battery back-up located on frame side.

Housing available in aluminum, black, and white finishes.

MOUNTING

Suitable for universal wall, side, or ceiling mounting.

Mounting canopy and wall mount backplate included.

EMERGENCY

Features a maintenance free, AAA, Ni-cad emergency battery back-up, and internal solid-state wiring for charging purposes.

Battery features a 24 hour recharge time and 90 minute discharge time.

Self-diagnostic test switch and charge indicator located on frame side. Indicator light will reflect high charge and readiness for operation.

Includes low voltage battery and brown-out protection. Disconnection required for full discharge.

MAINTENANCE

Fixture can be regularly and safely wiped down to ensure optimal fixture performance.

DRIVER & ELECTRICAL INFORMATION

Powered by high-quality constant-current LED drivers which are rated for 60Hz at 120/277VAC input. Consumes 4.5 Watts. 5 Watts when in emergency use.

WARRANTY

5-year warranty for parts and components (labor not included).


LISTINGS

UL 924 listed.
CEC Title 20 compliant.
Damp location suitable.
Meets or exceeds all requirements in NFPA 70, NFPA 101 life safety code.
BABA Build America Buy America Act compliant.

Aluminum, Black
and White Housing
Finishes

Green or Red
Color

Clear, Mirror
or White Face
Finish

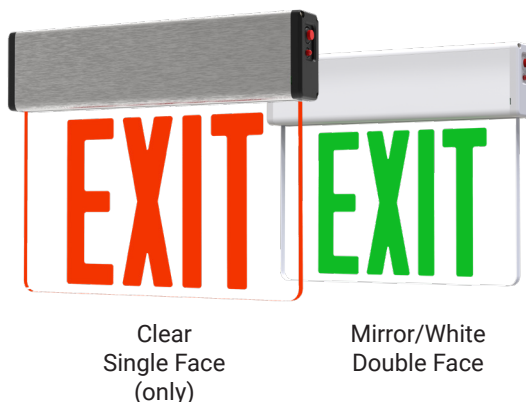

Example: **ELX-607-G-AL-1-CL-G2**

ELX-607						
SERIES	COLOR	HOUSING FINISH	FACE	FACE FINISH	GENERATION	OPTION
ELX-607 LED Edge-lit Exit Sign with Emergency and Self-Diagnostic	G - Green R - Red	AL - Aluminum B - Black W - White	1 - Single 2 - Double	CL - Clear (only available for single face option) M - Mirror WH - White	G2 - Generation 2	BABA - Build America Buy America Act Compliant