



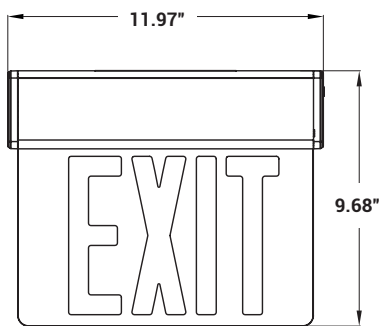










DIMENSIONS



MOUNTING OPTION



FEATURES

SAFE, SLIM, AND VERSATILE

This versatile LED exit sign satisfies convenience, aesthetics, and safety compliance. It features a slim profile for high-end architectural applications, red or green color options, and universal mounting. Dual circuit capability allows for alternative power sourcing in the event of a power failure. Ideal for marking exits and paths of egress across a variety of settings, including schools, offices, hospitals, retail and public spaces. Indoor damp location suitable and rated for a lifetime of up to 25 years without drops in illumination.

WATTAGE	3W
COLOR	Green (G), Red (R)
FACE	Double or Single Face
MOUNTING	"Universal": Ceiling Mount, Side Mount, and Wall Mount
FINISH	AL (Aluminum), Black (B), White (W)
AMBIENT TEMP.	10°C (50°F) to 40°C (104°F)
VOLTAGE	120/277VAC Dual Input
WARRANTY	5-year



FACE

Features compact, slim, and decorative edge-lit acrylic panels with a 6" height and 3/4" lettering stroke, and removable chevron directional arrows. Light powered by 8 highly efficient LEDs with a rated life of up to 25 years, with no drop in illumination.

Face panels removable for storage or maintenance.

Available with single or double faced panel options.

Face panels available in clear, mirror, or white finish.

CONSTRUCTION

Fixture body consists of injection-molded acrylic panels supported by a small extruded, 2-piece aluminum frame. Frame contains PC board, LED source, and upper acrylic face end.

Designed with a removable front cover for easy installation and maintenance.

Housing available in aluminum, black, and white finishes.

MOUNTING

Suitable for universal wall, side, or ceiling mounting.

Mounting canopy and wall mount backplate included.

MAINTENANCE

Fixture can be regularly and safely wiped down to ensure optimal fixture performance.

DRIVER & ELECTRICAL INFORMATION

Powered by high-quality constant-current LED drivers which are rated for 60Hz at dual 120/277VAC input. Dual-circuit input: accepts both normal and emergency power sources (generator or inverter), each supporting 120/277VAC. Consumes 3 Watts.

WARRANTY

5-year warranty for parts and components (labor not included).

LISTINGS


UL 924 listed.

CEC Title 20 compliant.

Damp location suitable.

Meets or exceeds all requirements in NFPA 70, NFPA 101 life safety code.

BABA Build America Buy America Act compliant.

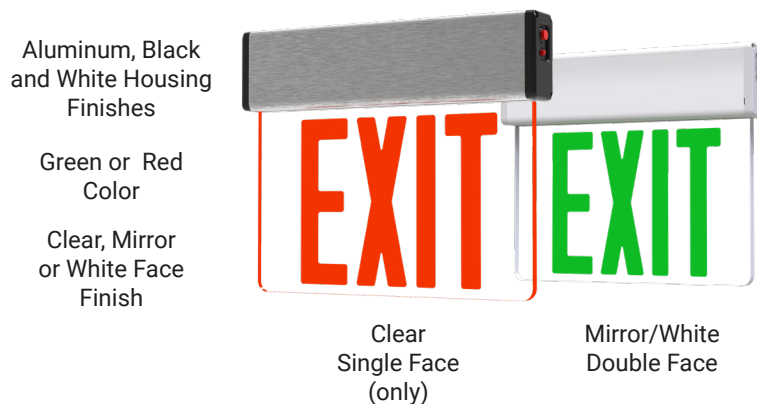

Example: **ELX-608-G-AL-1-CL-G2**

SERIES	COLOR	HOUSING FINISH	FACE	FACE FINISH	GENERATION	OPTION
ELX-608 LED Edge-lit Exit Sign Dual AC Input	G - Green R - Red	AL - Aluminum B - Black W - White	1 - Single 2 - Double	CL - Clear (only available for single face option) M - Mirror WH - White	G2 - Generation 2	BABA - Build America Buy America Act Compliant