

ELX-629

Remote Capable LED Exit Sign With Battery Back-Up

Architectural

Catalog Number:

Project Name:

Type:

Note:

MAXILUME
ARCHITECTURAL LIGHTING



HOUSING

Injection-molded thermoplastic ABS housing.
Plastic enclosure with 5VA flame retardant.
Replaceable directional chevron insert are easily remove and reinsert.
Red or green letter with 6" height and 3/4" stroke.
Single and double face configuration.

ELECTRICAL

120/277VAC Dual voltage operation.
Test switch and charge rate indicator.
Long-life, maintenance-free, rechargeable Ni-Cad battery.
24/48 hours recharge after 90 minutes discharge.

ILLUMINATION

6 red or green LED mount on LED PCBA.
Unit provide not less than 8.6cd/mm² on AC and DC mode.

MOUNTING


Suitable for wall mounting, ceiling mounting and side mounting.
Housing snaps to canopy with simple twist and locking tightly secure housing to canopy.

OPTIONS

CT option with self-testing and self-diagnostics.
Remote capability refer to model no. list.

LISTING

Suitable for use in 10°-40° ambient temperature, suitable for damp location.
UL listed and meets or exceed all requirement in NFPA 70,
NFPA 101 life safety code.
Compliant CEC title 20 efficiency regulations.

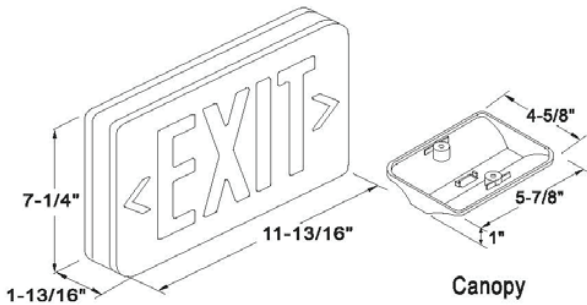

ELX-629 - ITEM SELECTOR: (Please check the boxes below for the option desired)

LETTER COLOR	HOUSING COLOR	OPTIONS	GENERATION
<input type="checkbox"/> G - Green	<input type="checkbox"/> W - White	<input type="checkbox"/> SDT	<input type="checkbox"/> G2
<input type="checkbox"/> R - Red			

Specified:

ELX-629 _____ - W-G2 - _____



MAXILUME
ARCHITECTURAL LIGHTING

A division of
Elite Lighting

Submittal form is available @ www.maxilume.com
Tel: 323-888-1973 • Fax: 323-888-1977

Specifications and Dimensions
subject to change without notice.

REV: MAXILUME-SPEC-03-17-2023