

ELX-714

New York City Approved LED Exit Sign & Incandescent Emergency Combo

Architectural Exit Sign

Catalog Number:

Project Name:

Note:

Type:



ILLUMINATION

- Two fully adjustable 12W, glare-free lamp heads with field installable 3rd emergency lighting head included.
- K/Os provided on sides of unit to relocate lamp heads.
- High performance smooth metal reflector and glass lens for optimal light distribution.
- Ultra bright, energy efficient, long life Red LED.
- New York City compliant 8" EXIT letters.

ELECTRICAL

- Dual 120/277 voltage.
- Charge rate/power "ON" LED indicator light and push-to-test switch for mandated code compliance testing.
- LVD (low voltage disconnect) prevents battery from deep discharge.
- 6V maintenance-free, rechargeable sealed lead acid battery.
- Internal solid-state transfer switch automatically connects the internal battery to LED board and lamp heads for minimum 90-minute emergency illumination.
- Fully automatic solid-state, two rate charger initiates battery charging to recharge a discharged battery in 24 hours.

MOUNTING


- Mounting hardware provided for back surface wall mount.
- Top and side K/Os provided for conduit feed applications.

HOUSING

- Durable, powder-coated 20-gauge steel construction in white or black finish.
- Injection-molded, engineering grade, high-impact, thermoplastic heads.
- Field removable steel knockout chevron directional indicators on exit face.

WARRANTY/LISTING

- Five year warranty on all electronics and housing. Battery prorated for five years.
- Meets UL924, NFPA 101 Life Safety Code, NEC, OSHA, Local and State Codes.

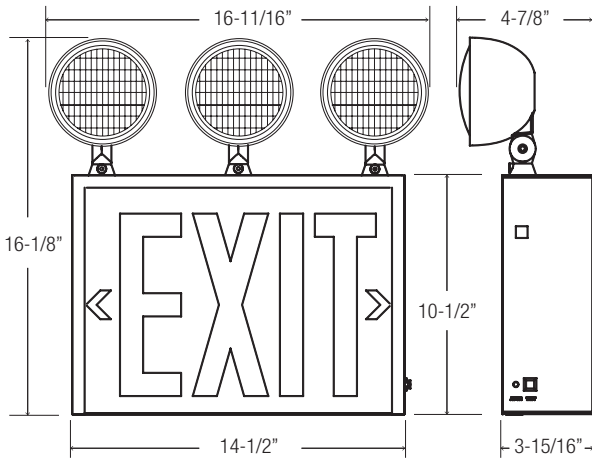

ELX-714 - ITEM SELECTOR: (Please check the boxes below for the option desired)

LETTER COLOR	HOUSING COLOR	NO. OF FACE
<input type="checkbox"/> R - Red	<input type="checkbox"/> W - White <input type="checkbox"/> B - Black	Single Face

SPECIFIED:

ELX-714 - _____ - _____
LETTER COLOR HOUSING COLOR