





DIMENSIONS

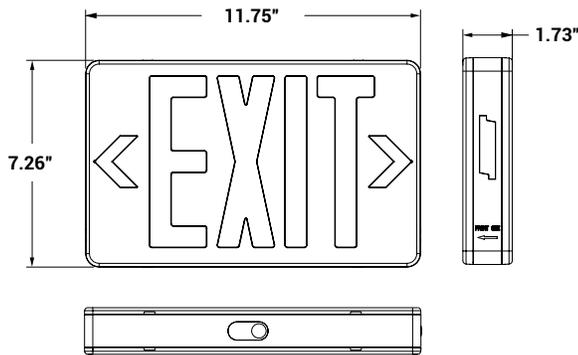

MOUNTING OPTION

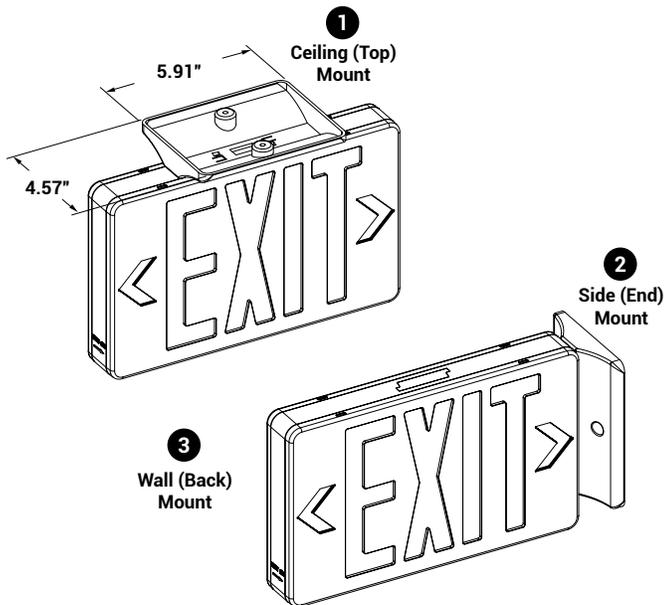

FEATURES

FIRE SAFE, SLIM, AND VERSATILE

This flame-retardant LED exit sign features a thermoplastic, compact profile, a "universal" double-faced design, and field switchable red or green colors, for a catch-all solution that goes beyond safety compliance. Universal mounting capability allows for wall, side, and ceiling mounting, for a truly all-purpose, versatile application.

Ideal for marking exits and paths of egress across a variety of settings, including schools, offices, hospitals, retail and public spaces. Indoor damp location suitable.

WATTAGE	3W
FACE	"Universal": Double or Single Face
MOUNTING	"Universal": Wall Mount, Side Mount, and Ceiling Mount
FINISH	Black (B), White (W)
AMBIEM TEMP.	50°-104°F (10°-40°C)
VOLTAGE	120/277VAC
BATTERY	1.2V, 900mAH Ni-Cad (Nickel Cadmium) battery pack with remote capacity
WARRANTY	5-year



OPTICS

Features a universal double faced design with field switchable red/green color. Backplate included for single face, wall mount configuration.

Matching color red or green diffuser should also be replaced when switching colors.

Default color factory set to red.

CONSTRUCTION

Includes a 6" height and 3/4" lettering stroke, and snap-in and snap-out direction indicators.

Housing built from injection molded thermoplastic for lightweight, durable exposure to elevated temperatures. A 5VA flame retardant plastic enclosure quickly stops combustion, dripping, or flaming particles to resist fire spread or burn through in accordance to UL 94 standards.

Color light switch located inside luminaire edge.

Available in black or white finishes.

MAINTENANCE

Fixture may be wiped down with a dry or damp cloth for optimal function.

MOUNTING

Mounting canopy and wall mount backplate included.

Mounting canopy allows for top, back or end mounting. Back mount standard for single face only. Canopy design uses cam locking pin to secure sign to canopy with no visible hardware seen from the floor.

Ships as a single sided exit with additional face plate and red/green color panels to easily convert from single face exit to double face exit.

Directional chevrons can be easily removed and reinserted depending on the application.

DRIVER & ELECTRICAL INFORMATION

Powered by high-quality constant-current LED drivers which are rated for 60Hz at 120/277VAC input. Consumes only 3 watts of power.

WARRANTY

5-year warranty for parts and components (labor not included).

LISTINGS

Meets UL924, NFPA 101 (current Life Safety Code), NEC, California Energy Commission Title 20 section 1605.3 (W)(4) and OSHA illumination standards. Meets all applicable FCC Title 47, Part 15, Subpart B requirements.

UL listed.

CEC Title 20 compliant.

RoHs compliant - lead and mercury free.

Damp location suitable.

BAA Buy American Act compliant



Switch from Red to Green



Example: **ELX-LED-503-G/R-W**

ELX-LED-503	G/R		
SERIES	COLOR	FINISH	OPTION
ELX-LED-503	G/R (Universal) Switchable Green/Red	B - Black W - White	BAA - Buy American Act Compliant