
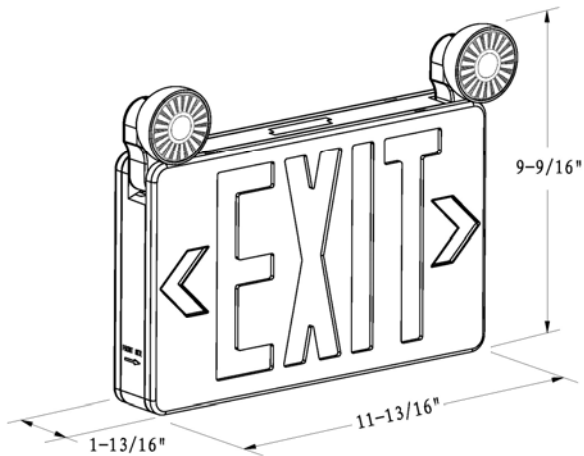


ELX-LED-718

LED EXIT SIGN AND EMERGENCY LIGHT COMBO

Catalog Number:	
Project Name:	
Note:	Type:

Architectural Exit Sign & Emergency

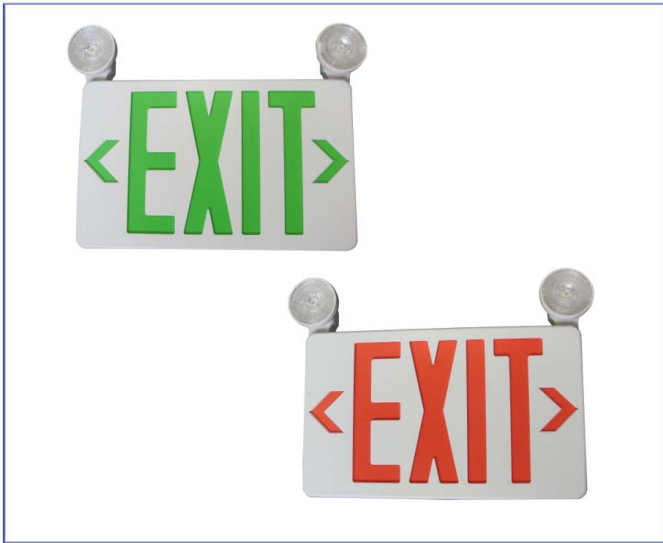

HOUSING

- Injection - molded thermoplastic ABS housing.
- Plastic enclosure with 5VA flame retardant.
- Replaceable directional chevron insert are easily remove and reinsert.
- Two fully adjustable round shape light heads.
- Red or green letter with 6 " height and 3/4" stroke.
- Single and double face configuration.

ELECTRICAL

- 120 - 277VAC Dual voltage operation.
- Test switch and charge rate indicator.
- 3.6V long - life, maintenance - free, rechargeable high temperature Ni - Cad battery or Ni - MH battery.
- 24/48 hours recharge after 90 minutes discharge.

ILLUMINATION

- SMD high power LED, CCT 5665K.
- Rated 0.8 watt per head for standard lumen output, fixture provide 150lm output on emergency mode.
- Rated 1.2 watts per head for high lumen model, fixture provide 260lm output on emergency mode.

MOUNTING

- Suitable for wall mounting, ceiling mounting and side mounting.
- Housing snaps to canopy with simple twist and locking tightly secure housing to canopy.

LISTING

- Suitable for use in 10°C (50°F)-40°C (104°F) ambient temperature, suitable for damp location.
- UL and cUL listed and meets or exceed all requirement in NFPA 70, NFPA 101 life safety code.
- Compliant CEC title 20 efficiency regulations



ELX-LED-718 - ITEM SELECTOR: (Please check the boxes below for the option desired)

LETTER COLOR	HOUSING COLOR
R - Red	W - White
G - Green	B - Black

SPECIFIED:

ELX-LED-718 - _____ - _____ - _____
 LETTER COLOR HOUSING COLOR OPTION