

ELX-LED-722

WET LOCATION ALL LED EXIT & EMERGENCY POLYCARBONATE COMBO

Catalog Number:

Project Name:

Note:

Type:

Architectural Combo Light



OPTIONS

- RC: Remote capacity of up to 7.2 watts.
- SDT: Self-diagnostic feature performs monthly, biannual, and annual tests to ensure reliable operation and meets electrical and life safety codes.
- TP: Tamper-proof hardware helps discourage unauthorized access to the unit.
- CW: Optional internal heater and battery blanket for extreme cold temperature applications (-20°C – 50°C).
- Custom: Signs available with requested "special" wording.

ELECTRICAL


- Dual 120/277V.
- Unique bi-color LED indicator light alerts occupant on battery condition (Green-normal, Red-check battery).
- 6V long life, maintenance free, rechargeable NiCd battery.
- Internal solid-state transfer switch automatically connects the internal battery to LED board and lampheads for minimum 90-minute emergency illumination.
- Fully automatic solid state, two rate charger initiates battery charging to recharge a discharged battery in 24 hours.

MOUNTING

- Die-cast aluminum mounting canopy included for top or end mount.
- Universal knockout pattern on back plate for wall mount.

ILLUMINATION

- Long lasting, efficient, ultra bright white LED lamp heads.
- 3.6 watt (3 LEDs x 1.2 watt) per head.
- Adjustable LED lamp heads provide optimal center-to-center spacing.
- Long-life, energy efficient Red or Green LED EXIT sign illumination.

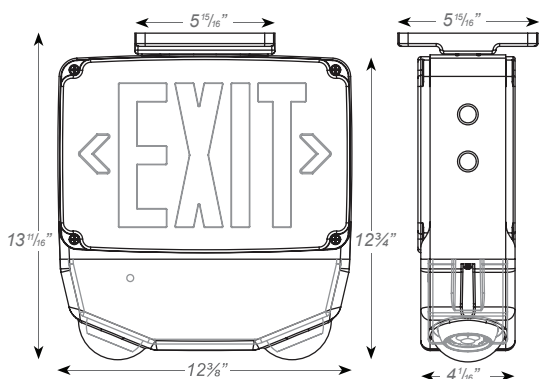

HOUSING

- 5VA flame retardant, UV stabilized polycarbonate in white, black or gray finish.
- High-impact resistant, UV stabilized polycarbonate clear lens.
- Corrosion resistant enclosure with engineering grade silicone gasket.
- Knockout's provided for conduit feed applications.
- EZ snap-out Chevron directional indicators.

WARRANTY / LISTING

- Five year warranty on all electronics and housing. Battery prorated for five years.
- Meets UL924, NFPA 101 Life Safety Code, NEC, OSHA, Local and State Codes.
- UL listed for wet locations (0°C – 50°C).
- Certified to CEC under Title 20 Regulations.

ELX-LED-722 - ITEM SELECTOR: (Please check the boxes below for the option desired)

LETTER COLOR	HOUSING COLOR	No of FACES	OPTIONS	
R - Red G - Green	W - White B - Black G - Gray (with white faceplate)	1 - Single 2 - Double	RC - Remote Capacity SDT - Self-Diagnostics TP - Tamper-Proof	CW - Cold Weather CUSTOM - Custom Wording

Special voltage options available. Check with your Elite Lighting Representative.

STANDARD



OPTIONAL



SPECIFIED:

ELX-LED-722

LETTER COLOR - HOUSING COLOR - No of FACES - OPTION



Submittal form is available @ www.maxilume.com
Tel: 323-888-1973 * Fax: 323-8881977

Specifications and Dimensions
subject to change without notice.