

ELX-LED-726

LOW LEVEL ALL LED EXIT & EMERGENCY THERMOPLASTIC COMBO


Catalog Number:

Project Name:

Note:

Type:

Architectural Exit Sign

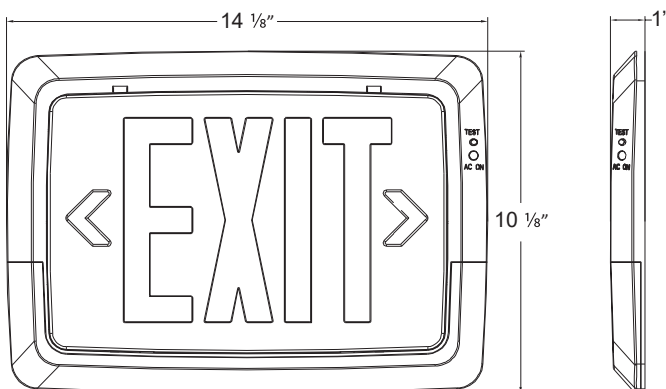

WARRANTY / LISTING

- Five year warranty on all electronics and housing. Battery prorated for five years.
- Meets UL924, NFPA 101 Life Safety Code, NEC, OSHA, Local and State Codes.
- UL listed for damp locations (0°C – 50°C).
- Certified to CEC UNDER Title 20 Regulations.

ELX-LED-726 - ITEM SELECTOR:

(Please check the boxes below for the option desired)

LETTER COLOR	HOUSING COLOR	No of FACES
R - Red G - Green	W - White B - Black	1 - Single Face

ELECTRICAL

- Dual 120/277 voltage.
- Unique bi-color LED indicator alerts occupant on battery condition (Green-normal, Red-check battery).
- Charge rate/power "ON" LED indicator light and push-to-test switch for mandated code compliance testing.
- 3.6V Long life, maintenance-free, rechargeable NiCd battery.
- Internal solid-state transfer switch automatically connects the internal battery to Red/Green LED board and the White LED light strip for minimum 90-minute emergency illumination.
- Fully automatic solid-state, two rate charger initiates battery charging to recharge a discharged battery in 24 hours.

ILLUMINATION

- Long lasting, efficient ultra bright white LED light strip.
- 3.1 watts (24 LEDs x 0.13 watts) per light strip.
- Patent-pending high performance, smooth, chrome plated, metallized reflector with acrylic UV stabilized lens for optical light distribution.
- Long life ultra-bright, energy efficient Red or Green LED EXIT sign illumination.

MOUNTING

- Universal knockout pattern on back plate for wall mount.

HOUSING

- Patented specification-grade, low profile thin plastic design is ideal for low level applications.
- Injection-molded, engineering grade, 5VA flame retardant, high-impact resistant, thermoplastic in white or black finish.
- EZ snap-out Chevron directional indicators.

SPECIFIED:
ELX-LED-726

LETTER COLOR - HOUSING COLOR - No of FACES

