

# ELX-LED-734

SPECIFICATION SHEET FOR LED EXIT SIGN AND EMERGENCY LIGHTING COMBO

Catalog Number:

Project Name:

Type:

Note:

**MAXILUME**  
ARCHITECTURAL LIGHTING

## Exit/Emergency Light Combo



### Housing

- Injection-molded thermoplastic ABS housing.
- Plastic enclosure with 5VA flame retardant.
- Two fully adjustable glare-free square shape light heads for emergency light.
- Single and double face universal.
- Easy replacement pictogram design.

### Electrical

- 120-347VAC universal voltage input, switching power.
- 24hours recharge after 2 hours discharge.
- Test switch and charge rate indicator.
- 3.6V long-life, maintenance-free, rechargeable Ni-Cad battery
- AC &UDC function available.

### Illumination


- SMD 2835 0.5W LED, CCT 5700K, L70 50,000 hours.

### Mounting

- Suitable for wall mounting, ceiling mounting and side mounting.
- Housing snaps to canopy with simple twist and locking tightly secure housing to canopy.

### Listing

- Suitable for use in 10°C-40°C ambient temperature, suitable for damp location.
- CSA listed meets all requirement in C22.2 No. 141-10, suitable for Canada market.

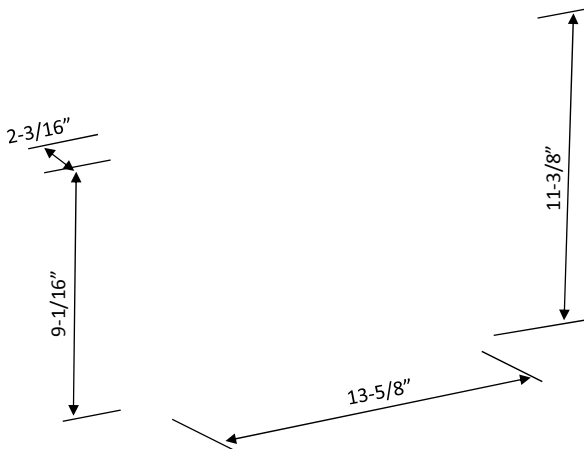

**ELX-LED-703** - ITEM SELECTOR: (Please check the boxes below for the option desired)

LETTER COLOR	HOUSING COLOR
<input type="checkbox"/> <b>G</b> - Green	<input type="checkbox"/> <b>W</b> - White
<input type="checkbox"/> <b>R</b> - Red	<input type="checkbox"/> <b>B</b> - Black



California Title 20 Compliant

**Specified:**

**ELX-LED-703** \_\_\_\_\_ - \_\_\_\_\_  
LETTER COLOR HOUSING COLOR

**MAXILUME**  
ARCHITECTURAL LIGHTING

A division of  
**Elite Lighting**

Submittal form is available @ [www.maxilume.com](http://www.maxilume.com)  
Tel: 323-888-1973 • Fax: 323-888-1977

Specifications and Dimensions  
subject to change without notice.

REV: MAXILUME-SPEC-03-10-2011