

ELX-LED-736

RECESSED MOUNT 6 INCH LED EXIT SIGN AND EMERGENCY LIGHTING COMBINATION

Catalog Number:

Project Name:

Type:

Note:

MAXILUME
ARCHITECTURAL LIGHTING

Exit/Emergency Light



GENERAL DESCRIPTION

- Recessed ceiling and recessed wall mount
- Full angle adjustable lamp head
- High temperature long life Ni-MH battery
- Extrusion aluminum alloy trim plate
- Acrylic panel changeable design
- 6" height letter
- Suitable for damp location
- Slim type design
- Self-test/self-diagnostics function available
- Remote capability design with additional battery
- 30 Degree beam angel

Rated Power Supply: 120/277VAC 60Hz

Charge time: 24 hours

Discharge duration: 1.5hour

Test facility: Manual test

Mounting: Recessed ceiling and recessed wall

LED: High power LED for lamp head , SMD LED for exit sign,

Luminance of safety sign: Meet UL 924

Ambient temperature: 10°C-40°C(50°F-104°F), suitable damp location

Insulation Class: Class I



Certification: UL 924



OPTION 1



OPTION 2

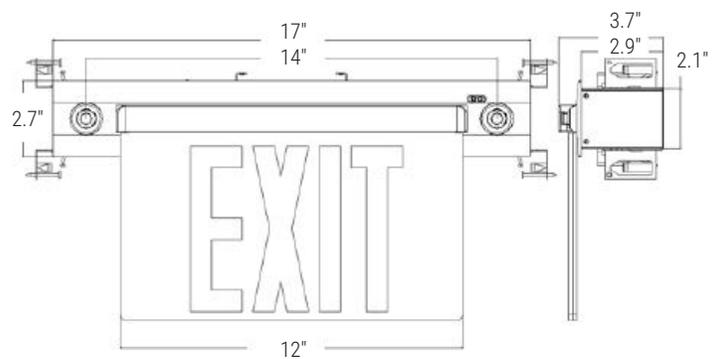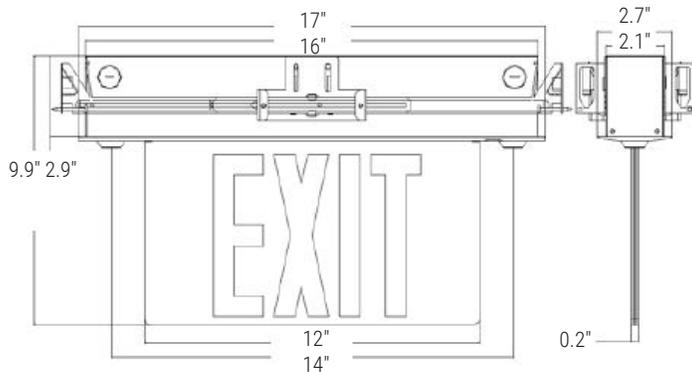

ORDERING GUIDE

PART NUMBERS

- ELX-LED-736-G-W-1 (Green)
- ELX-LED-736-R-W-1 (Red)
- ELX-LED-736-G-W-2 (Green)
- ELX-LED-736-R-W-2 (Red)



MAXILUME
ARCHITECTURAL LIGHTING

A division of
Elite Lighting

Submittal form is available @ www.maxilume.com
Tel: 323-888-1973 • Fax: 323-888-1977

Specifications and Dimensions
subject to change without notice.

REV: MAXILUME-SPEC-03-10-2011