


TRIM OPTIONS



ROUND FLANGED



SQUARE FLANGED

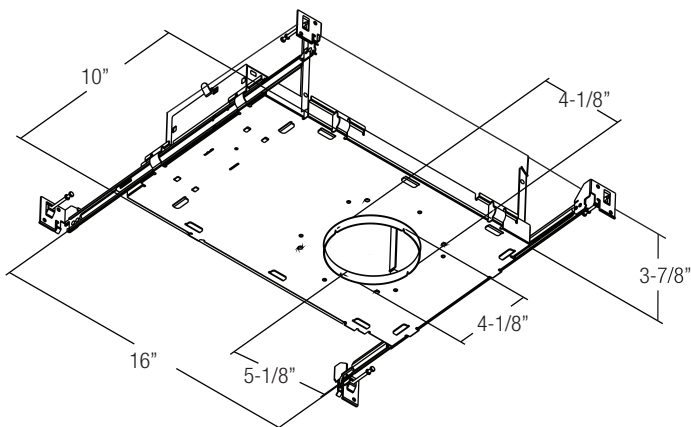

| NOMINAL LUMENS | ELITE |
|----------------|-------|
| 1500 | 18W |
| 1200 | 16W |
| 900 | 12W |


Based on 4000K, 90+ CRI. Actual wattage may vary +/- 5%

FEATURES


A small aperture, architectural LED downlight that delivers the ultimate in uncompromised quality and performance, with precise, glare-free illumination, and unmatched flexibility. With the use of a single universal housing, it utilizes a multitude of trims, field changeable optics, and is fully adjustable to any beam angle, up to 35 degrees, with a full 365-degree horizontal rotation. Whether it's high-end architectural, hospitality, commercial, residential, or retail, the ER3 provides the most innovative solution to any design application that requires a small aperture.

| | |
|-------------------------|--|
| LUMENS | Elite Platform: 900, 1200, 1500 |
| TUNABLE WHITE PLATFORMS | TWH-50K-27K (50K to 27K) TWH-65K-27K (65K-27K) |
| CRI | 90+ Standard |
| COLOR QUALITY | 2 Step MacAdam Ellipse |
| DISTRIBUTION PATTERNS | SPD(Sport-15°), ND(Narrow-24°), MD(Medium-35°), MWD(Medium Wide-45°), WD(Wide-52°) |
| TRIM OPTIONS | Round and Square, Trim and Trimless, with Open Downlight, Lensed Downlight, Wall Wash, Adjustable Accent, and Pinhole Downlight, |
| REFLECTOR COLORS | WH (White), CL (Chrome), SHZ (Satin Haze), BK (Black) |
| FLANGE COLORS | WH (White) |
| DIMMING | 1% Dimming Standard, 0-10V (DIM10), DMX-512 DMX-RDM, BLE, LUTECO, DALI |
| EMERGENCY | 10W - Up to 1000L Output (Bodine BSL310) 20W - Up to 2000L Output (Bodine BSL20) |
| LIFETIME | L70 at 50,000 Hours |
| PHOTOMETRIC TESTS | In Accordance with IES LM79-08, LM80 and TM-30, TM-21 |
| CCEA OPTION | For CCEA approved ER3 Family, please contact Elite Lighting for more information. |


WD: WIDE
Candlepower Distribution Curve




MWD: MEDIUM WIDE
Candlepower Distribution Curve




MD: MEDIUM
Candlepower Distribution Curve



ND: NARROW
Candlepower Distribution Curve



SPD: SPOT
Candlepower Distribution Curve



Reference IES files for additional distribution curve information.



FLANGED OPTION

Post-painted powder coated Die-Cast trim ring available in white and custom colors (Please consult factory for custom paint color options). Collar and trim rotate jointly, and a Solite frosted lens is standard on all trims (Please consult factory for additional lens options). Available in Open Downlight, Lensed Downlight, Pinhole Downlight, Slot, Adjustable Downlight Accent or Lensed Adjustable Wall Wash. Trims attach to the housing with piano springs for snug fit and zero light leakage.

TRIM-LESS OPTION

Die-Cast perforated mesh cover intended for installation in drywall or plaster ceilings. Mudding may be applied right up to the edge of the luminaire opening to provide a seamless appearance. Trimless accessory is secured to the housing to prevent fractures in the ceiling and/or drywall during and after installation. Trims attach to the housing with piano springs for snug fit and zero light leakage. Available in Open Downlight, Lensed Downlight, Pinhole Downlight, Slot, Adjustable Downlight Accent or Lensed Adjustable Wall Wash.

HOUSING

Designed for new construction installations and suitable for use in IC and Non IC applications. Thermally protected, specification grade adjustable recessed housing. For new construction insulated ceilings where housing will be in direct contact with insulation. die-formed all aluminum construction is painted matte black for maximum heat dissipation, rust protection and glare-free illumination.

MOUNTING

Pre-installed bar hangers allow housing to be positioned and locked at any point within a 24" joist span. They can be positioned on either the long or short axis of the housing and can be shortened for 12" joists. Bar hangers can fit onto T-Bar spline with additional slots and holes for special mounting methods, if necessary. Butterfly brackets are also provided and are constructed from 18-gauge steel and can be adjusted vertically. Butterfly brackets may be installed with 3/4" or 1-1/2" lathing channel, 1/2" EMT, or optional C-Channel mounting bars are available.

WARRANTY

Five-year warranty for parts and components. (Labor not included.)

LISTINGS

c-UL-us - Listed for Wet Location if used with 1328 or 1307 Trims.

CP - City of Chicago Environmental Air (CCEA) marking for plenum applications (option)

DIMMING & DRIVER INFORMATION

SMART WHITE High Performance platform with a tuning range of 5000K to 2700K (TWH-50K-27K).

Control via DIM10 (0-10V), ELITE-CONNECT 0-10V, LUTRON (Lutron PSQ02U T-series 1% 2-channel tunable white driver), DMX512-RDM, DALI

Control via DIM10, ELITE-CONNECT 0 10V, DMX512, DMX-RDM, BLE, DALI


Control via DIM10, DMX512-RDM, LUTECO, BLE, DALI

Junction box and Driver can be accessed from below the ceiling and above the ceiling. Junction Box is Listed for through branch circuit wiring.

LED DYNAMIC PLATFORM OPTIONS



Tunable White with Smart White technology allows the tuning of luminaires to mimic the natural color patterns throughout the day, enhancing interior office spaces, hospitality, and architectural elements. Tuning of intensity and color in classrooms enables a diversification in student activities, while the use of tunable white technology in healthcare stimulates circadian rhythm, accelerating the healing process. Complementing colors and textures in retail merchandising also has an impact on sales, utilizing the technology to adjust colors throughout the season. A CRI of 90+ is standard/

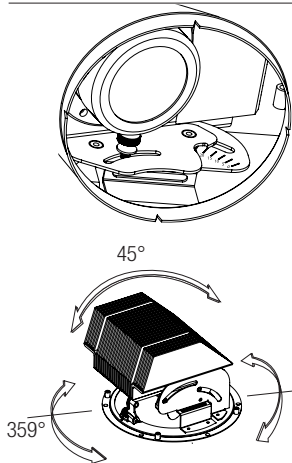


AIMING

Proprietary hot aiming system allows the lamp to be positioned at the perfect setting to ensure the proper position of the beam of light before trim is installed. Lamp holder is designed to ensure that the center beam of the light source emerges out of luminaire at any angled position from 0° to 35°.


OPTICS

SPD (Sport-15°), ND (Narrow-24°), MD (Medium-35°), MWD (Medium Wide-45°), WD (Wide-52°)




365° HORIZONTAL LOCKING

Effortlessly rotates on a 365° horizontal rotational smooth slotted groove track system



TOOL-LESS ADJUSTABILITY

Of the luminaire is to ensure whatever position is desired up to 35 degrees the beam and maximum lumen power is exiting the luminaire accordingly.





NUMERICAL DEGREE

Allows for the luminaires to be easily field adjusted for precision, performance, and versatility. At installation, you have the ability to lock the beam angle to 1 degree increments, which are marked at 5 degree increments.

CONTROL OPTIONS


With the integration of controls, Elite Lighting now offers its products with controls-ready performance that increases energy efficiency, smarter space planning, and the enhancement of safety and productivity in the workplace. By utilizing these controls, Elite Lighting fixtures enable your customer's facility to run smarter, with the use of an easily controlled system through any platform.
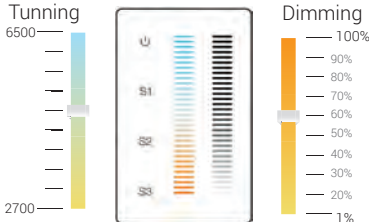
| CONTROL PROTOCOLS | SMART WHITE |
|---|-------------|
| <p>ELITE-CONNECT (EC-WC-TWH-HW-MVOLT) - Hard-wired, 0-10V, 120/277V wall mounted controller for CCT Tuning and Intensity Dimming through Simple Touch screen pad, provided by Elite Lighting. Programmable for up to 3-scenes, with a dimming range down to 1%. Applicable for office spaces, hospitality, educational, health care, and retail merchandising.</p>  | ✓ |
| <p>DIM10 (0-10V 1% Dimming Standard) In order to Control the Color Tuning and dimming option with 0-10V driver you must dedicate two control inputs, one for the Dimming Control and another for CCT Tuning. Can be dimmed and tuned with 2 wall box dimmers and compatible with most control systems and or daylight harvesting systems.</p> <p>DIM10-LUTRON Compatible with Lutron GRAFIK Eye QS or GRAFIK Eye 3000 by using two GRX-TVI Lutron 0-10V Dimming interfaces; one to tune and another to control dimming. Also compatible with Lutron VIVE system by using two FCJS-010 PowPak or FCJS-ECO EcoSystem PowPak modules per fixture; one to tune and one to control dimming.</p>  | ✓ |
| <p>DMX (Available on Elite, LED Engin) - Compatible with Digital Multiplex Controller, Available with two options: DMX-512: Standard DMX Controller and DMX-RDM: DMX Controller with Remote Device Management.</p> | ✓ |
| <p>LUTECO Compatible with Lutron EcoSystem. Compatible with Lutron GRAFIK Eye EcoSystem, Lutron Energi Saver node EcoSystem, or Lutron Quantum systems.</p> | ✓ |
| <p>DALI Compatible with Digital Addressable Lighting Interface, available with two options: DT6 and DT8.</p> | ✓ |

Round Flanged Trim Options



Round Trim-less Options

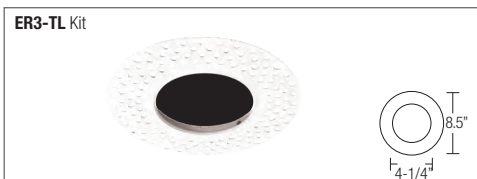

FLANGED OPTION:

Post-painted powder coated Die-Cast trim ring available in white and custom colors (Please consult factory for custom paint color options). Collar and trim rotate jointly, and a Solite frosted lens is standard on all trims (Please consult factory for additional lens options). Available in Open Downlight, Lensed Downlight, Pinhole Downlight, Slot, Adjustable Downlight Accent or Lensed Adjustable Wall Wash. Trims attach to the housing with piano springs for snug fit and zero light leakage.

FINISH



WH-White



CL-Chrome



SHZ-Satin Haze



BK-Black




TRIMLESS OPTION:

Die-Cast perforated mesh cover intended for installation in drywall or plaster ceilings. Mudding may be applied right up to the edge of the luminaire opening to provide a seamless appearance. Trimless accessory is secured to the housing to prevent fractures in the ceiling and/or drywall during and after installation. Trims attach to the housing with piano springs for snug fit and zero light leakage. Available in Open Downlight, Lensed Downlight, Pinhole Downlight, Slot, Adjustable Downlight Accent or Lensed Adjustable Wall Wash.


Note:

Additional lens filters must only be used on open non-lensed downlight trim options.

Square Flanged Trim Options

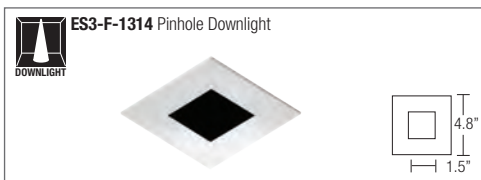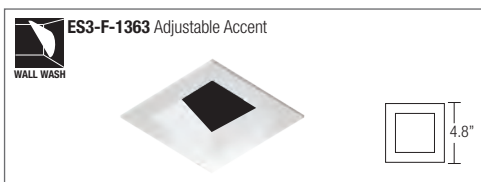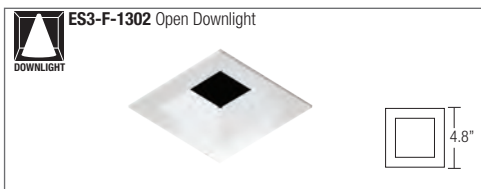

Square Trim-less Options

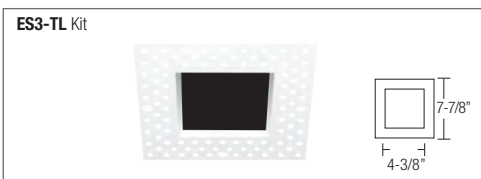

FLANGED OPTION:

Post-painted powder coated Die-Cast trim ring available in white and custom colors (Please consult factory for custom paint color options). Collar and trim rotate jointly, and a Solite frosted lens is standard on all trims (Please consult factory for additional lens options). Available in Open Downlight, Lensed Downlight, Pinhole Downlight, Slot, Adjustable Downlight Accent or Lensed Adjustable Wall Wash. Trims attach to the housing with piano springs for snug fit and zero light leakage.

FINISH



WH-White

CL-Chrome



SHZ-Satin Haze

BK-Black

TRIMLESS OPTION:

Die-Cast perforated mesh cover intended for installation in drywall or plaster ceilings. Mudding may be applied right up to the edge of the luminaire opening to provide a seamless appearance. Trimless accessory is secured to the housing to prevent fractures in the ceiling and/or drywall during and after installation. Trims attach to the housing with piano springs for snug fit and zero light leakage. Available in Open Downlight, Lensed Downlight, Pinhole Downlight, Slot, Adjustable Downlight Accent or Lensed Adjustable Wall Wash.

Note:

Additional lens filters must only be used on open non-lensed downlight trim options.

ORDERING GUIDE

| TUNABLE WHITE | ELITE | TYPE | LUMENS | DIMMING | VOLTAGE | OPTICS | CRI | EMERGENCY | DISC | WALL MOUNT CONTROLLER |
|---------------|-------|--|---|--|---|---|------------------------------|--|---|--|
| | | <input type="checkbox"/> ER3-SHAL-ADJ-LED-TWH-50K-27K <input type="checkbox"/> ER3-SHAL-ADJ-LED-TWH-65K-27K | <input type="checkbox"/> 900L <input type="checkbox"/> 1200L <input type="checkbox"/> 1500L | <input type="checkbox"/> DIM10* <input type="checkbox"/> DMX-512 <input type="checkbox"/> DMX-RDM <input type="checkbox"/> LUTECO | <input type="checkbox"/> 120 <input type="checkbox"/> 277 <input type="checkbox"/> MVOLT <small>(For 347V Consult Factory)</small> | <input type="checkbox"/> SPD (15°) <input type="checkbox"/> ND (24°) <input type="checkbox"/> MD (35°) <input type="checkbox"/> MWD (45°) <input type="checkbox"/> WD (52°) | <input type="checkbox"/> 90+ | <input type="checkbox"/> EMG-LED-10W <input type="checkbox"/> EMG-LED-20W <small>Only accessible from the top of the luminaire</small> | <input type="checkbox"/> Blank - Standard bar hangers (included) <input type="checkbox"/> BP31 - 27" C-channel bar hangers. <input type="checkbox"/> RIF - RIF filter <input type="checkbox"/> SF - Spray Foam suitable for insulation. <small>(Consult factory for details)</small> <input type="checkbox"/> CP - CCEA Chicago Plenum | <input type="checkbox"/> EC-WC-TWH-HW-MVOLT ¹ |

For 0-10V driver you must dedicate two control inputs, one for the Dimming Control and another for CCT Tuning.

LUTRON - (Available on Elite platform) Compatible with Lutron GRAFIK Eye QS or GRAFIK Eye 3000 by using two GRX-TVI Lutron 0-10V Dimming interfaces, one to tune and another control dimming. Also compatible with Lutron VIVE system by using two FCJS-010 PowPak modules per luminaire, one to tune and one to control dimming.

¹ Compatible with Elite 0-10V Platform and LED Engin 0-10V Platform

TRIM OPTIONS

TRIM & TRIM-LESS OPTIONS

| ROUND TRIM OPTIONS | | | | |
|---|--|--|--|--|
| TRIM OPTIONS | | FINISH | LENS FILTERS | |
| <input type="checkbox"/> ER3-F-1328- Lensed Downlight (wet Location) <input type="checkbox"/> ER3-F-1307- Lensed Wall Wash (wet Location) <input type="checkbox"/> ER3-F-1314** - Pinhole Downlight <input type="checkbox"/> ER3-F-1303** - Slot | | <input type="checkbox"/> W-WH - White <input type="checkbox"/> CL-WH - Chrome <input type="checkbox"/> SHZ-WH-Satin Haze <input type="checkbox"/> BK-WH-Black | <input type="checkbox"/> BP8MR16-FR - FROSTED <input type="checkbox"/> BP8MR16-SF - SOFT FOCUS <input type="checkbox"/> BP8MR16-CL - CLEAR <input type="checkbox"/> BP8MR16-UV - ULTRAVIOLET <input type="checkbox"/> BP8MR16-SP - SPREAD <input type="checkbox"/> BPmr16-HC - HONEY COMB <input type="checkbox"/> BPmr16-LI - LINEAR <input type="checkbox"/> BPmr16-SOL - SOLITE Note: Additional lens filters must only be used on open non-lensed downlight trim options | |
| <input type="checkbox"/> ER3-F-1302- Open Downlight <input type="checkbox"/> ER3-F-1363- Open Adjustable Accent <input type="checkbox"/> ER3-TL-KIT* - Kit | | | <input type="checkbox"/> BP8MR16-BL - BLUE <input type="checkbox"/> BP8MR16-GR - GREEN <input type="checkbox"/> BP8MR16-PI - PINK <input type="checkbox"/> BP8MR16-PU - PURPLE <input type="checkbox"/> BP8MR16-DL - DAY LIGHT <input type="checkbox"/> BP8MR16-YE - YELLOW <input type="checkbox"/> BP8MR16-AM - AMBER <input type="checkbox"/> BP8MR16-OR - ORANGE <input type="checkbox"/> BP8MR16-RE - RED | |

| SQUARE TRIM OPTIONS | | | | |
|---|--|--|--|--|
| TRIM OPTIONS | | FINISH | LENS FILTERS | |
| <input type="checkbox"/> ES3-F-1328- Lensed Downlight (wet Location) <input type="checkbox"/> ES3-F-1307- Lensed Wall Wash (wet Location) <input type="checkbox"/> ES3-F-1314** - Pinhole Downlight | | <input type="checkbox"/> W-WH - White <input type="checkbox"/> CL-WH - Chrome <input type="checkbox"/> SHZ-WH-Satin Haze <input type="checkbox"/> BK-WH-Black | <input type="checkbox"/> BP8MR16-FR - FROSTED <input type="checkbox"/> BP8MR16-SF - SOFT FOCUS <input type="checkbox"/> BP8MR16-CL - CLEAR <input type="checkbox"/> BP8MR16-UV - ULTRAVIOLET <input type="checkbox"/> BP8MR16-SP - SPREAD <input type="checkbox"/> BPmr16-HC - HONEY COMB <input type="checkbox"/> BPmr16-LI - LINEAR <input type="checkbox"/> BPmr16-SOL - SOLITE Note: Additional lens filters must only be used on open non-lensed downlight trim options | |
| <input type="checkbox"/> ES3-F-1302- Open Downlight <input type="checkbox"/> ES3-F-1363- Open Adjustable Accent <input type="checkbox"/> ES3-TL-KIT* - Kit | | | <input type="checkbox"/> BP8MR16-BL - BLUE <input type="checkbox"/> BP8MR16-GR - GREEN <input type="checkbox"/> BP8MR16-PI - PINK <input type="checkbox"/> BP8MR16-PU - PURPLE <input type="checkbox"/> BP8MR16-DL - DAY LIGHT <input type="checkbox"/> BP8MR16-YE - YELLOW <input type="checkbox"/> BP8MR16-AM - AMBER <input type="checkbox"/> BP8MR16-OR - ORANGE <input type="checkbox"/> BP8MR16-RE - RED | |

*Driver only accessible from the top of the luminaire when using Trim-less application

**Pinhole and Slot are only available in black (Reflector) and white (Trim)


Emergency only accessible from the top of the luminaire

COLOR FILTERS & DISTRIBUTION FILTERS



MR16 LENS FILTER

| CAT. # | COLOR |
|------------|-----------|
| BP8MR16-BL | BLUE |
| BP8MR16-GR | GREEN |
| BP8MR16-PI | PINK |
| BP8MR16-PU | PURPLE |
| BP8MR16-DL | DAY LIGHT |
| BP8MR16-YE | YELLOW |
| BP8MR16-AM | AMBER |
| BP8MR16-OR | ORANGE |
| BP8MR16-RE | RED |



MR16 SPECIALTY LENS FILTER




| CAT. # | COLOR |
|---------------|-------------|
| 1. BP8MR16-FR | FROSTED |
| 2. BP8MR16-SF | SOFT FOCUS |
| 3. BP8MR16-CL | CLEAR |
| 4. BP8MR16-UV | ULTRAVIOLET |
| 5. BP8MR16-SP | SPREAD |
| 6. BPmr16-HC | HONEY COMB |
| 7. BPmr16-LI | LINEAR |
| 8. BPmr16-SOL | SOLITE |

Note:

Additional lens filters must only be used on open non-lensed downlight trim options.

*Please consult factory


TWH-50K-27K

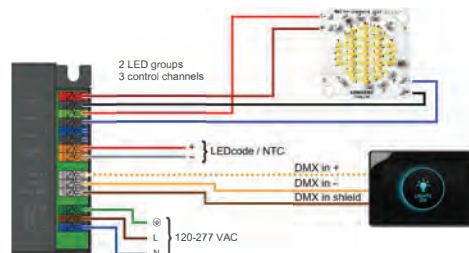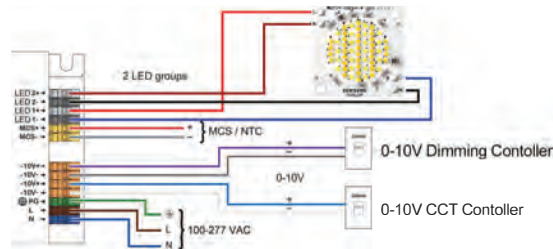

DMX512-A-RDM accessory board connects to an electrically isolated expansion port within the ALM

TWH Controller EC-WC-TWH-HW-MVOLT

Wiring Diagram:






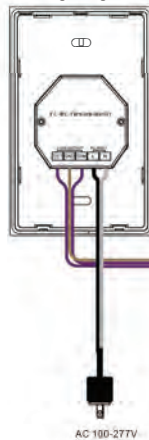


- 100-277VAC input
- Touch slide tunable white and brightness control.
- 2 channels 1-10V signal output.
- 0.1%-100% dimming
- Waterproof grade:IP20
- Save up to max 3 different colors









Safety & Warnings:

DO NOT install with power applied to device
DO NOT expose the device to moisture

| | |
|-----------------------|------------------|
| Output Signal | 2x(1-10V) signal |
| Power Supply | 100-277VAC |
| Power consumption | 30 mA max |
| Operating temperature | 0-40°C |
| Relative humidity | 8% to 80% |
| Dimensions | 75x120x40.8mm |

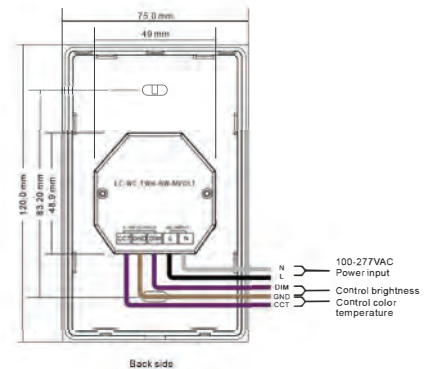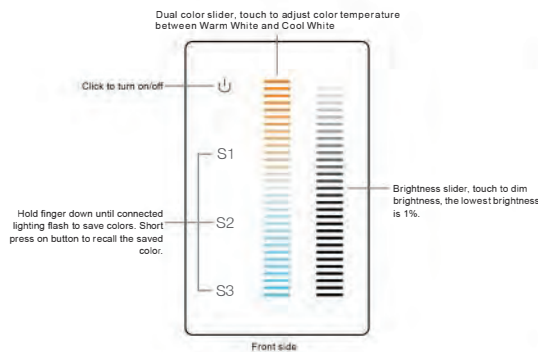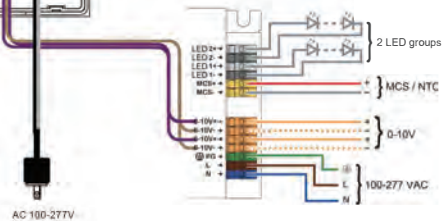


TWH-LENGN-65K-18K

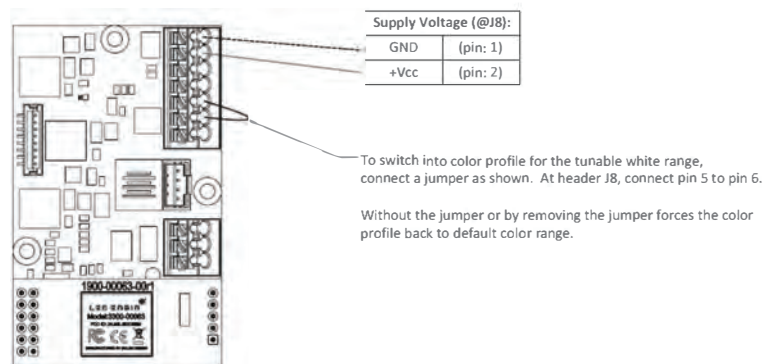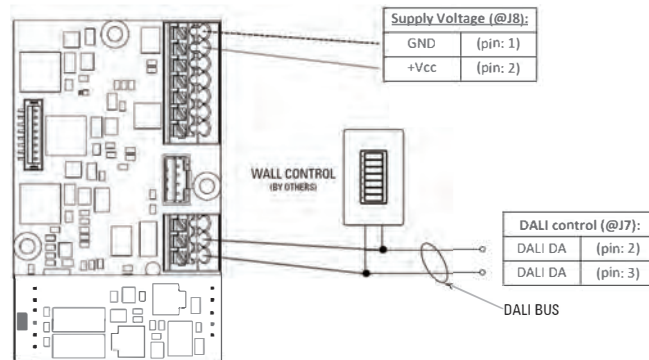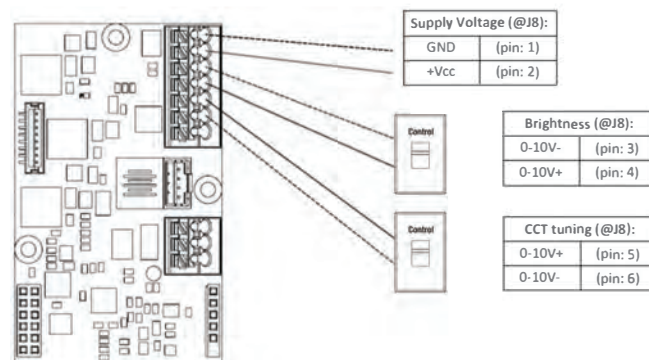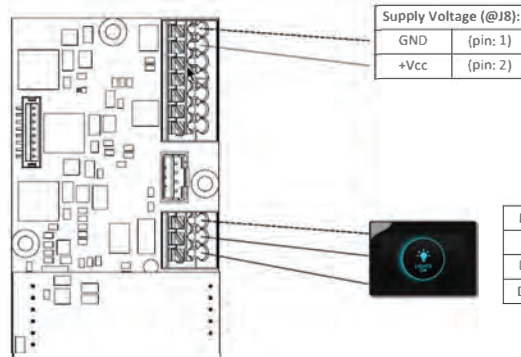


TWH-LTX-80K-16K


TUNABLE COLOR ROUND LED ARRAY

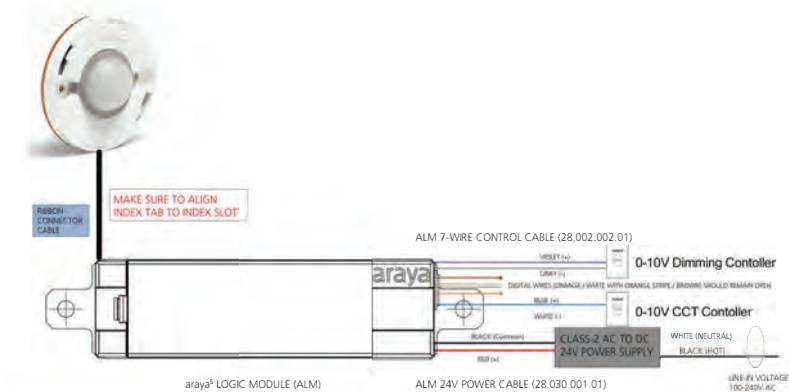

TUNABLE COLOR ROUND LED ARRAY

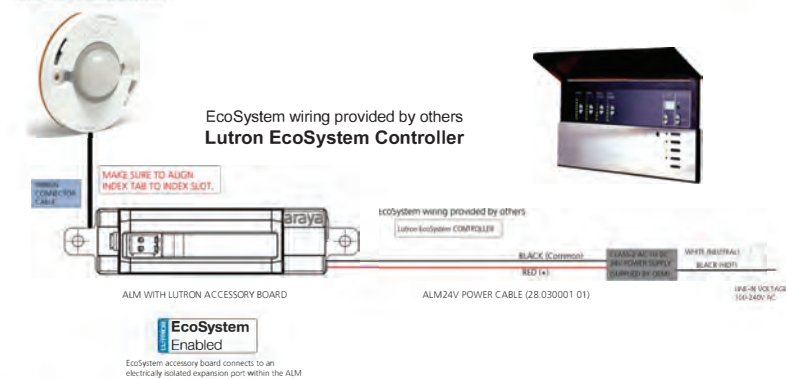

TUNABLE COLOR ROUND LED ARRAY

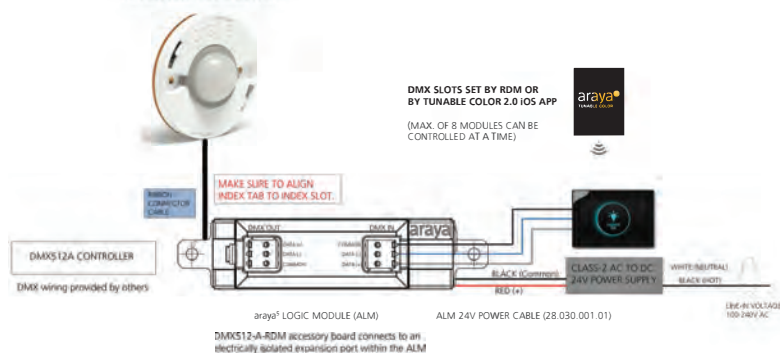

TUNABLE COLOR ROUND LED ARRAY

