

### Specifications of Mini Square Flexilight:

Structure	Voltage	Max. Loading Length (Color)	Cutting Unit (Color)	Bulb Spec.	Number of Bulbs/Unit	Wattage
	12V	30'	4"	3.0V 0.07A 0.21W	12	2.52W/foot
	24V	60'	9"	3.0V 0.07A 0.21W	12	2.52W/foot
	110-120V	150'	18"	6.5V 0.07A 0.46W	12	2.5W/foot

### Packages Available


Item Number	Length	Package	ERSF	- 120	- 150	- COLOR
			Item No.	Voltage	Length	Specify color
ERSF-120-150	150'	/Roll				
ERSF-24-150*	150'	/Roll				
ERSF-12-150**	150'	/Roll				

(Available in 150' Rolls only, no custom cut)

NOTE: EACH ROLL INCLUDES; 3pcs ERSM1XXX Power Cords, 3pcs SM3 Splice Connectors, 3pcs SM4 End Caps

### Mini Square Flexilight Accessories:

- ERSM1-120V Mini Square Flexilight 6ft. Power Cord w/ Power Connector
- ERSM1-24V\* Mini Square Flexilight 6ft. Power Cord w/ Power Connector
- ERSM1-12V\*\* Mini Square Flexilight 6ft. Power Cord w/ Power Connector
- SM3 Mini Square Flexilight Splice Connector
- SM4 Mini Square Flexilight End Caps
- F5 Mini Square Flexilight Tie Strap
- M6 Mini Square Flexilight Mounting Clips
- F7 Mini Square Flexilight Suction Cup
- M8 Mini Square Flexilight 6ft. Channel
- SM9 Mini Square Flexilight Easy Splice Connector
- SM10 Mini Square Flexilight Y-cord

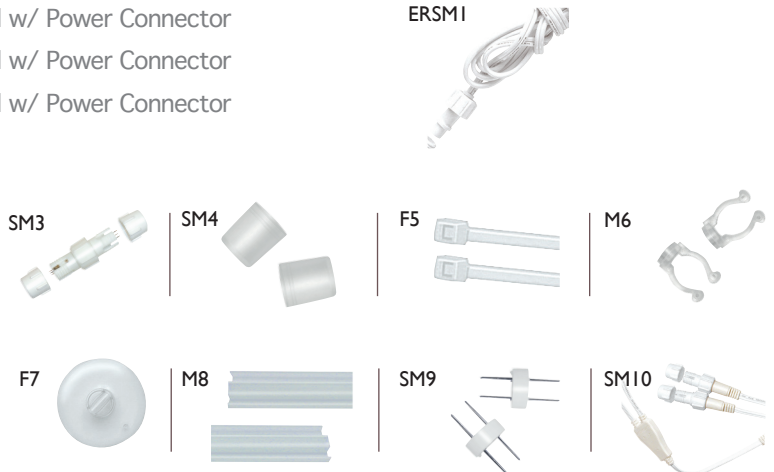

### Standard Controller

MODEL	VOLTAGE AVAILABLE	MAX. LENGTH	FUNCTIONS
ERWL-2C-M-S-110	120V	150 FT.	Static/Flashing
ERWL-2C-M-S-24A*	24V	60 FT.	Static/Flashing
ERWL-2C-M-S-12A**	12V	30 FT.	Static/Flashing

(\*Requires 24V AC power source)

(\*\*Requires 12V AC power source)



FLEXIBLE ROPELIGHT