


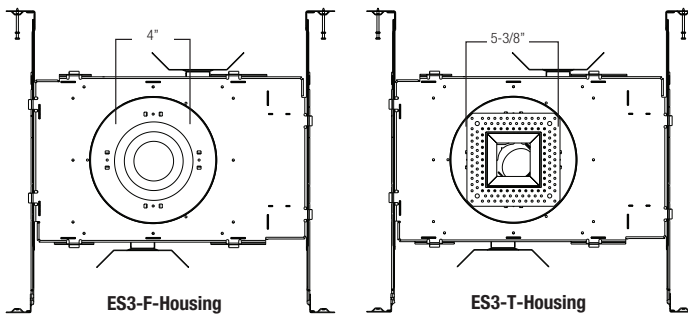
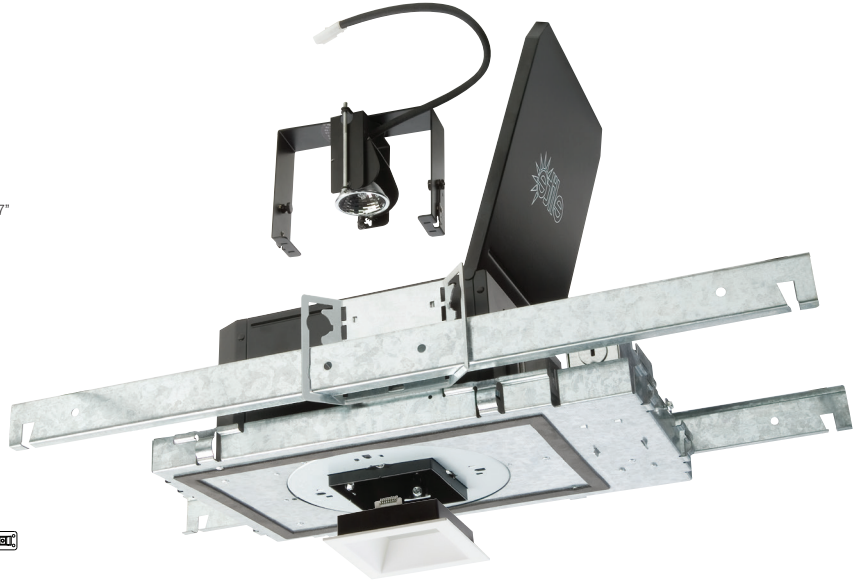
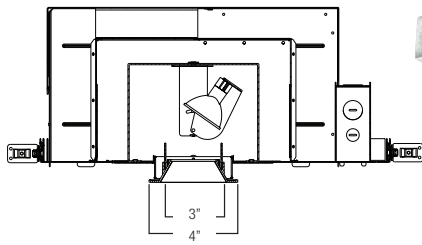


FUSION ES3 NON-IC LED/LV SERIES

LED/LOW VOLTAGE MR16 ES3 SQUARE APERTURE RECESSED

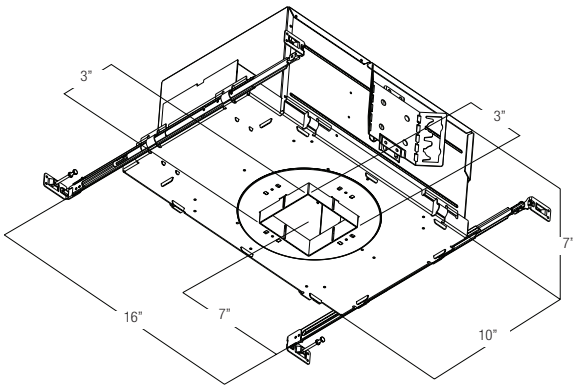

1302 - Lensed downlight



Trimless



1307 - Lensed wall wash



ES3

FUSION ES3 NON-IC LED / LOW VOLTAGE SERIES

ORDERING INFORMATION

Example: **ES3-F-LV-N-50W-MR16-E-120-BP31-EFS-1302-W-WH-BP-ES3-MR16-CL**

LUMINAIRE SELECTION

ES3		LV	N		E			
SERIES	FLANGE OPTION	LIGHT SOURCE	HOUSING TYPE	WATTAGE	BALLAST	VOLTAGE	ACCESSORIES	OPTIONS
ES3	F - (Flanged) T - (Trimless)	LV - Low voltage	N - New construction for non insulated ceiling	20W-MR16 37W-MR16 42W-MR16 50W-MR16 71W-MR16 10W-LED	E - (Electronic)	120V 277V	blank - Standard bar hangers (included) BP31 - 27" C-channel bar hangers	RIF - RIF filter

LED - LED Lamp

TRIM OPTION SELECTION

TRIM FLANGE OPTION	TRIM	TRIM COLOR	TRIM ACCESSORIES
ES3 - Flanged trim ETS - Trimless	1302 - Lensed downlight 1307 - Lensed wall wash	W-WH - White SI-SI - Silver	BP-ES3-MR16-CL - Clear Lens BP-ES3-MR16-LI - Linear spread Lens BP-ES3-MR16-SP - Spread/Prismatic Lens BP-ES3-MR16-SO - Solite Lens BP-ES3-MR16-UV - Anti UV/Ultraviolet Lens



LED MR16, 12VAC, 8-10W
Equivalent to 40-50W Halogen
is available, compatible with this fixtures.

FLOOD (36°)
NARROW FLOOD (25°)
SPOT (20°)
VERY SPOT (10°)



fusion by MAXILUME

Due to the changes of constant improvement in lighting technology, all details are subject to change without notice. Consult factory for up to date information.