


**FEATURES**

A small profile LED track light that delivers optimal lumen output, with precise aiming for accent, task, or general illumination, integrating into any design. Track heads are adjustable up to 360 degrees horizontally, 180 degrees vertically, and are compatible with 1-circuit and 2-circuit track. With the use of a friction-based locking movement system, the head can be adjusted and re-adjusted to a precise position, delivering light where needed. Available in an array of color temperatures, it can accentuate the full spectrum of cool to warm tones, and is the perfect complement for retail merchandising, galleries, museums, supermarkets, hospitality, and commercial.

**OPTICS**

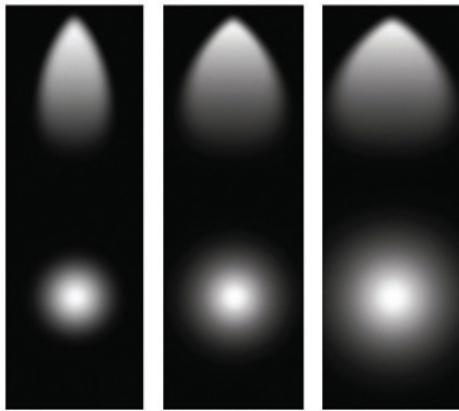

|                          |  |                                |
|--------------------------|--|--------------------------------|
| <b>SP</b><br>Spot<br>15° | <b>NFL</b><br>Narrow Flood<br>24°, 25° | <b>FL</b><br>Flood<br>36°, 38° |
|--------------------------|--|--------------------------------|

| NOMINAL LUMENS | DELIVERED LUMENS | WATTAGE |
|----------------|------------------|---------|
| 800            | 835              | 11 W    |

Based on 3000K, 90+ CRI. Actual wattage may vary +/- 5%

|                   |  |
|-------------------|--|
| LUMENS            | 800  |
| CCT               | 30K  |
| CRI               | 90+  |
| COLOR QUALITY     | 2 Step MacAdam Ellipse   |
| DISTRIBUTION      | SP (Spot), NFL (Narrow Flood), FL (Flood)                            |
| AIMING            | 360 degrees horizontally, 180 degrees vertically                     |
| FINISH            | AWH (Architectural White)<br>ABK (Architectural Black)<br>Custom RAL |
| DIMMING           | Flicker Free 10% Dimming TRIAC forward-phase or leading-edge 120V.   |
| LIFETIME          | L70 at 50,000 Hours  |
| PHOTOMETRIC TESTS | In Accordance with IES LM79-08, LM80 and TM-30, TM-21                |



**OPTICS**

A polycarbonate optical refractor allows for precise beam control and even distribution, with a variety of lumen options.

**CONSTRUCTION**

All track heads are designed using a proprietary coolLED Advanced Thermodynamic Design. The track head body is constructed of extruded aluminum, with a die-cast custom designed concealed heat sink, providing a thermal management system that is engineered for extremely long life and service period.

**FINISH**

Post-painted available in white, black and custom RAL colors.

**ACCESSORIES**

Track heads may accommodate 1 to 3 accessories. Please consult factory for standard or custom options.

**TRACK COMPATIBILITY**

Track heads are standard, with the compatibility for use with Mono-point, 1-Circuit, and 2-Circuit type H track. Please consult factory for 2-Circuit, 2-Neutral 120V Track, 2-Circuit, 2-Neutral 277V Track, 3-Circuit 1-Neutral, and Dali System Track.

**DIMMING AND DRIVER INFORMATION**

**DIMTR** – Electronic constant current LED driver compatible with TRIAC forward-phase or leading-edge dimming. Available in 120V. Dimmable down to 1%, standard. The LED driver is rated for 50 to 60Hz at 120V input, produces less than 20%THD, and has a power factor between 90% and 100%, and is thermally protected for additional safety. Please consult factory for 277V, or 0-10V dimming options.

**WARRANTY**

Five-year warranty for parts and components. (Labor not included)

| SERIES            | LUMENS  | DIMMING                                   | OPTICS  | CCT/CRI                                | COLOR  |
|-------------------|---|---|---|--|--|
| <b>ET-LED-212</b> | <input type="checkbox"/> <b>800L</b> - 800 lumens | <input type="checkbox"/> <b>DIMTR-120</b> | <input type="checkbox"/> <b>SP</b> - Spot 12°<br><input type="checkbox"/> <b>NFL</b> - Narrow Flood 24°-25°<br><input type="checkbox"/> <b>FL</b> - Flood 36°-38° | <input type="checkbox"/> <b>30K-90</b> | <input type="checkbox"/> <b>AWH</b> - Architectural White<br><input type="checkbox"/> <b>ABK</b> - Architectural Black |

**ET-LED-212-800L-DIMTR-120-FL-30K-90-AWH**

TEST NO.: **EL0818122**

INPUT WATTS: **11.3**

LUMENS: **835**


CRI: **90**

EFFICACY: **74**

CCT: **3000K**

SPACING CRITERIA: **0.58**

**Candle Power Distribution (Candelas)**



**Zonal Lumens Summary**

| Zone | Lumens | %Lamp  | %Fixt  |
|------|--------|--------|--------|
| 0-20 | 382.90 | 46.50  | 45.90  |
| 0-30 | 559.19 | 67.90  | 67.00  |
| 0-40 | 655.31 | 79.50  | 78.50  |
| 0-60 | 768.80 | 93.30  | 92.10  |
| 0-80 | 827.20 | 100.40 | 99.10  |
| 0-90 | 834.53 | 101.30 | 100.00 |

**Luminance (Average candela/M<sup>2</sup>)**

| Angle in Degrees | Average |       |       |
|------------------|---------|-------|-------|
|                  | 0°      | 45°   | 90°   |
| 45               | 59505   | 57609 | 60309 |
| 55               | 47124   | 46438 | 42011 |
| 65               | 46602   | 43519 | 40067 |
| 75               | 46844   | 43311 | 39027 |
| 85               | 44521   | 46260 | 41314 |

**Lumens Per Zone**

| Zone  | Lumens |
|-------|--------|
| 0-10  | 131.69 |
| 10-20 | 251.22 |
| 20-30 | 176.29 |
| 30-40 | 96.12  |
| 40-50 | 65.82  |
| 50-60 | 47.68  |
| 60-70 | 36.30  |
| 70-80 | 22.09  |
| 80-90 | 7.33   |

**Candela Tabulation**

| θ  | 0       | 5 | 15 | 25 | 35 | 45 | 55 | 65 | 75 | 85 | 90 |
|----|---------|---|----|----|----|----|----|----|----|----|----|
| 0  | 1565.94 |   |    |    |    |    |    |    |    |    |    |
| 5  | 1586.55 |   |    |    |    |    |    |    |    |    |    |
| 15 | 1138.76 |   |    |    |    |    |    |    |    |    |    |
| 25 | 501.87  |   |    |    |    |    |    |    |    |    |    |
| 35 | 172.40  |   |    |    |    |    |    |    |    |    |    |
| 45 | 88.81   |   |    |    |    |    |    |    |    |    |    |
| 55 | 57.05   |   |    |    |    |    |    |    |    |    |    |
| 65 | 41.57   |   |    |    |    |    |    |    |    |    |    |
| 75 | 25.59   |   |    |    |    |    |    |    |    |    |    |
| 85 | 8.19    |   |    |    |    |    |    |    |    |    |    |
| 90 | 0.13    |   |    |    |    |    |    |    |    |    |    |

**Coefficients of Utilization - Zonal Cavity Method**

Effective Floor Cavity Reflectance 0.20

| RC | 80% |     |     |     | 70% |     |     |     | 50% |     |     |     | 30% |     |     |     | 10% |     |     |     | 0% |  |
|----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|----|--|
|    | RW  | 70% | 50% | 30% | 10% | 70% | 50% | 30% | 10% | 50% | 30% | 10% | 50% | 30% | 10% | 50% | 30% | 10% | 50% | 30% |    |  |
| 0  | 121 | 121 | 121 | 121 | 121 | 118 | 118 | 118 | 118 | 113 | 113 | 113 | 108 | 108 | 108 | 103 | 103 | 103 | 103 | 101 |    |  |
| 1  | 114 | 110 | 107 | 105 | 105 | 111 | 108 | 106 | 103 | 104 | 102 | 100 | 100 | 99  | 97  | 97  | 95  | 94  | 92  | 92  |    |  |
| 2  | 107 | 102 | 97  | 93  | 93  | 105 | 100 | 96  | 92  | 96  | 93  | 90  | 93  | 90  | 88  | 91  | 88  | 86  | 84  | 84  |    |  |
| 3  | 101 | 94  | 88  | 84  | 84  | 99  | 93  | 87  | 83  | 90  | 85  | 82  | 87  | 84  | 81  | 85  | 82  | 79  | 78  | 78  |    |  |
| 4  | 96  | 88  | 81  | 77  | 77  | 94  | 86  | 81  | 76  | 84  | 79  | 75  | 82  | 78  | 74  | 80  | 77  | 74  | 72  | 72  |    |  |
| 5  | 91  | 82  | 76  | 71  | 71  | 89  | 81  | 75  | 71  | 79  | 74  | 70  | 77  | 73  | 69  | 76  | 72  | 69  | 67  | 67  |    |  |
| 6  | 87  | 77  | 71  | 66  | 66  | 85  | 76  | 70  | 66  | 75  | 69  | 65  | 73  | 69  | 65  | 72  | 68  | 65  | 63  | 63  |    |  |
| 7  | 83  | 73  | 66  | 62  | 62  | 81  | 72  | 66  | 62  | 71  | 65  | 62  | 70  | 65  | 61  | 68  | 64  | 61  | 59  | 59  |    |  |
| 8  | 79  | 69  | 63  | 58  | 58  | 78  | 68  | 62  | 58  | 67  | 62  | 58  | 66  | 61  | 58  | 65  | 61  | 58  | 56  | 56  |    |  |
| 9  | 76  | 66  | 59  | 55  | 55  | 74  | 65  | 59  | 55  | 64  | 59  | 55  | 63  | 58  | 55  | 62  | 58  | 55  | 53  | 53  |    |  |
| 10 | 72  | 63  | 57  | 53  | 53  | 71  | 62  | 56  | 53  | 61  | 56  | 52  | 60  | 56  | 52  | 60  | 55  | 52  | 51  | 51  |    |  |

RC - Ceiling Cavity Reflectance

RW - Wall Reflectance

| Cone of Light     |                             |               |
|-------------------|-----------------------------|---------------|
| 4.0               | 5.42 fc                     | 10.4 ft       |
| 8.0               | 1.35 fc                     | 20.8 ft       |
| 12.0              | 0.6 fc                      | 31.2 ft       |
| 16.0              | 0.34 fc                     | 41.5 ft       |
| 20.0              | 0.22 fc                     | 52 ft         |
| 24.0              | 0.15 fc                     | 62.4 ft       |
| Distance to Plane | Initial Footcandle at Nadir | Beam diameter |

BEAM DIA. MEASURED AT 50% OF NADIR F.C.