


**FEATURES**

A small profile LED track light that delivers optimal lumen output, with precise aiming for accent, task, or general illumination, integrating into any design. Track heads are adjustable up to 360 degrees horizontally, 180 degrees vertically, and are compatible with 1-circuit and 2-circuit track. With the use of a friction-based locking movement system, the head can be adjusted and re-adjusted to a precise position, delivering light where needed. Available in an array of color temperatures, it can accentuate the full spectrum of cool to warm tones, and is the perfect complement for retail merchandising, galleries, museums, supermarkets, hospitality, and commercial.

**OPTICS**

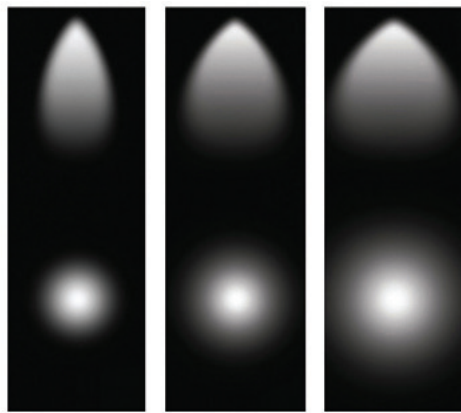

<b>SP</b> Spot 15°	<b>NFL</b> Narrow Flood 24°, 25°	<b>FL</b> Flood 36°, 38°
--------------------------	--	--------------------------------

NOMINAL LUMENS	DELIVERED LUMENS	WATTAGE
1100	1162	15.6 W

Based on 3000K, 90+ CRI. Actual wattage may vary +/- 5%

LUMENS	1100
CCT	30K
CRI	90+
COLOR QUALITY	2 Step MacAdam Ellipse
DISTRIBUTION	SP (Spot), NFL (Narrow Flood), FL (Flood)
AIMING	360 degrees horizontally, 180 degrees vertically
FINISH	AWH (Architectural White) ABK (Architectural Black) Custom RAL
DIMMING	Flicker Free 10% Dimming TRIAC forward-phase or leading-edge 120V.
LIFETIME	L70 at 50,000 Hours
PHOTOMETRIC TESTS	In Accordance with IES LM79-08, LM80 and TM-30, TM-21



**OPTICS**

A polycarbonate optical refractor allows for precise beam control and even distribution, with a variety of lumen options.

**CONSTRUCTION**

All track heads are designed using a proprietary coolLED Advanced Thermodynamic Design. The track head body is constructed of extruded aluminum, with a die-cast custom designed concealed heat sink, providing a thermal management system that is engineered for extremely long life and service period.

**FINISH**

Post-painted available in white, black and custom RAL colors.

**ACCESSORIES**

Track heads may accommodate 1 to 3 accessories. Please consult factory for standard or custom options.

**TRACK COMPATIBILITY**

Track heads are standard, with the compatibility for use with Mono-point, 1-Circuit, and 2-Circuit type H track. Please consult factory for 2-Circuit, 2-Neutral 120V Track, 2-Circuit, 2-Neutral 277V Track, 3-Circuit 1-Neutral, and Dali System Track.

**DIMMING AND DRIVER INFORMATION**

**DIMTR** – Electronic constant current LED driver compatible with TRIAC forward-phase or leading-edge dimming. Available in 120V. Dimmable down to 1%, standard. The LED driver is rated for 50 to 60Hz at 120V input, produces less than 20%THD, and has a power factor between 90% and 100%, and is thermally protected for additional safety.

**WARRANTY**

Five-year warranty for parts and components. (Labor not included)

Example: **ET-LED-217-1100L-DIMTR-120-30K-90-FL-AWH**


SERIES	LUMENS	DIMMING	CCT/CRI	OPTICS	COLOR
<b>ET-LED-217</b>	<input type="checkbox"/> <b>1100L</b> - 1100 lumens	<input type="checkbox"/> <b>DIMTR-120</b>	<input type="checkbox"/> <b>30K-90</b>	<input type="checkbox"/> <b>SP</b> - Spot 12° <input type="checkbox"/> <b>NFL</b> - Narrow Flood 24°-25° <input type="checkbox"/> <b>FL</b> - Flood 36°-38°	<input type="checkbox"/> <b>AWH</b> - Architectural White <input type="checkbox"/> <b>ABK</b> - Architectural Black

**ET-LED-217-1100L-DIMTR-120-30K-90-NFL-AWH**

TEST NO.: **EL0818123**

INPUT WATTS: **15.6**      LUMENS: **1162**      CRI: **90**      EFFICACY: **75**      CCT: **3000K**      SPACING CRITERIA: **0.52**

**Candle Power Distribution (Candelas)**



**Zonal Lumens Summary**

Zone	Lumens	%Lamp	%Fixt
0-20	643.42	56.40	55.40
0-30	899.90	78.90	77.40
0-40	1024.46	89.80	88.10
0-60	1121.23	98.30	96.50
0-80	1157.59	101.40	99.60
0-90	1162.36	101.90	100.00

**Luminance (Average candela/M<sup>2</sup>)**

Angle in Degrees	Average		
	0°	45°	90°
45	48878	56664	74842
55	28332	32181	31900
65	26390	25336	28609
75	25371	25335	26543
85	20004	28104	30170

**Lumens Per Zone**

Zone	Lumens
0-10	238.75
10-20	404.68
20-30	256.48
30-40	124.56
40-50	64.48
50-60	32.30
60-70	22.59
70-80	13.77
80-90	4.77

**Candela Tabulation**

Candela		0
0	3068.49	
5	2817.23	
15	1542.00	
25	557.30	
35	194.73	
45	72.95	
55	34.30	
65	23.54	
75	13.86	
85	3.68	
90	0.10	

**Coefficients of Utilization - Zonal Cavity Method**  
Effective Floor Cavity Reflectance 0.20

RC	80%					70%				50%			30%			10%			0%	
	70%	50%	30%	10%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%	0%	
0	121	121	121	121	118	118	118	118	113	108	108	108	108	104	104	104	104	104	102	
1	116	113	110	108	113	111	108	106	106	105	103	103	103	103	101	100	99	98	97	
2	110	105	101	98	108	104	100	97	100	97	95	97	95	93	94	92	91	89	89	
3	105	99	94	90	103	97	93	89	95	91	88	92	89	86	90	87	85	84	84	
4	100	93	88	84	99	92	87	83	90	86	82	88	84	81	86	83	80	79	79	
5	96	88	82	78	94	87	82	78	85	81	77	84	80	77	82	79	76	75	75	
6	92	84	78	74	91	83	77	74	81	77	73	80	76	73	79	75	72	71	71	
7	88	80	74	70	87	79	74	70	78	73	69	76	72	69	75	72	69	67	67	
8	85	76	70	67	84	75	70	66	74	69	66	73	69	66	72	68	66	64	64	
9	81	73	67	63	80	72	67	63	71	66	63	70	66	63	70	66	63	61	61	
10	78	70	64	61	78	69	64	61	68	64	60	68	63	60	67	63	60	59	59	

RC - Ceiling Cavity Reflectance

RW - Wall Reflectance

Cone of Light		
4.0	10.6 fc	8.9 ft
8.0	2.65 fc	17.7 ft
12.0	1.18 fc	26.6 ft
16.0	0.66 fc	35.4 ft
20.0	0.42 fc	44.3 ft
24.0	0.29 fc	53.1 ft

Distance to Plane      Initial Footcandle at Nadir      Beam diameter

BEAM DIA. MEASURED AT 50% OF NADIR F.C.