


FEATURES

A small profile LED track light that delivers optimal lumen output, with precise aiming for accent, task, or general illumination, integrating into any design. Track heads are adjustable up to 360 degrees horizontally, 180 degrees vertically, and are compatible with 1-circuit and 2-circuit track. With the use of a friction-based locking movement system, the head can be adjusted and re-adjusted to a precise position, delivering light where needed. Available in an array of color temperatures, it can accentuate the full spectrum of cool to warm tones, and is the perfect complement for retail merchandising, galleries, museums, supermarkets, hospitality, and commercial.

OPTICS

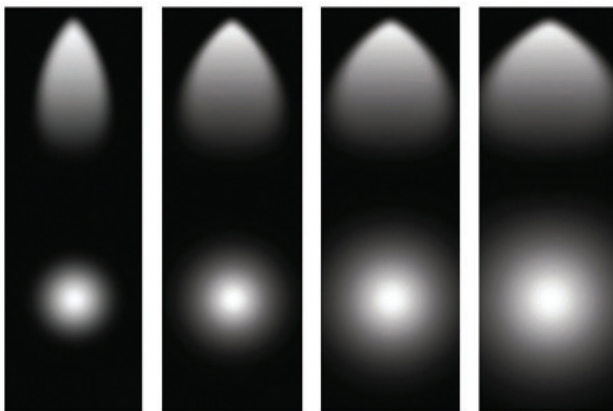

SP Spot 15°	NFL Narrow Flood 24°, 25°	FL Flood 36°, 38°	WFL Wide Flood 60°
--------------------------	--	--------------------------------	---------------------------------

NOMINAL LUMENS	DELIVERED LUMENS	WATTAGE
1200	1121	14.7 W

Based on 3000K, 90+ CRI. Actual wattage may vary +/- 5%

LUMENS	1200
CCT	30K
CRI	90+
COLOR QUALITY	2 Step MacAdam Ellipse
DISTRIBUTION	SP (Spot), NFL (Narrow Flood), FL (Flood), WFL (Wide Flood)
AIMING	360 degrees horizontally, 180 degrees vertically
FINISH	AWH (Architectural White) ABK (Architectural Black) Custom RAL
DIMMING	Flicker Free 10% Dimming TRIAC forward-phase or leading-edge 120V.
LIFETIME	L70 at 50,000 Hours
PHOTOMETRIC TESTS	In Accordance with IES LM79-08, LM80 and TM-30, TM-21



OPTICS

A polycarbonate optical refractor allows for precise beam control and even distribution, with a variety of lumen options.

CONSTRUCTION

All track heads are designed using a proprietary coolLED Advanced Thermodynamic Design. The track head body is constructed of extruded aluminum, with a die-cast custom designed concealed heat sink, providing a thermal management system that is engineered for extremely long life and service period.

FINISH

Post-painted available in white, black and custom RAL colors.

ACCESSORIES

Track heads may accommodate 1 to 3 accessories. Please consult factory for standard or custom options.

TRACK COMPATIBILITY

Track heads are standard, with the compatibility for use with Mono-point, 1-Circuit, and 2-Circuit type H track. Please consult factory for 2-Circuit, 2-Neutral 120V Track.

DIMMING AND DRIVER INFORMATION

DIMTR – Electronic constant current LED driver compatible with TRIAC forward-phase or leading-edge dimming. Available in 120V. Dimmable down to 1%, standard. The LED driver is rated for 50 to 60Hz at 120V input, produces less than 20%THD, and has a power factor between 90% and 100%, and is thermally protected for additional safety.

WARRANTY

Five-year warranty for parts and components. (Labor not included)

Example: **ET-LED-351-1200L-DIMTR-120-30K-90-FL-AWH**

SERIES	LUMENS	DIMMING	CCT/CRI	OPTICS	COLOR
ET-LED-351	<input type="checkbox"/> 1200L - 1200 lumens	<input type="checkbox"/> DIMTR-120	<input type="checkbox"/> 30K-90	<input type="checkbox"/> SP - Spot 15° <input type="checkbox"/> NFL - Narrow Flood 24°-25° <input type="checkbox"/> FL - Flood 36°-38° <input type="checkbox"/> WFL - Wide Flood 60°	<input type="checkbox"/> AWH - Architectural White <input type="checkbox"/> ABK - Architectural Black

ET-LED-351-1200L-DIMTR-120-30K-90-FL-AWH

INPUT WATTS: **14.7**

LUMENS: **1121**

CRI: **90**


EFFICACY: **76**

CCT: **3000K**

TEST NO.: **EL111815**

SPACING CRITERIA: **0.70**

Candle Power Distribution (Candelas)



Zonal Lumens Summary

Zone	Lumens	%Lamp	%Fixt
0-20	562.98	50.40	50.20
0-30	892.61	79.90	79.60
0-40	1029.58	92.10	91.90
0-60	1105.35	98.90	98.60
0-80	1118.68	100.10	99.80
0-90	1120.77	100.30	100.00

Luminance (Average candela/M²)

Angle in Degrees	Average		
	0°	45°	90°
45	36186	43538	98604
55	12738	19172	24515
65	7986	10314	16009
75	9299	10663	9775
85	9942	14912	15526

Lumens Per Zone

Zone	Lumens
0-10	169.93
10-20	393.06
20-30	329.62
30-40	136.97
40-50	57.39
50-60	18.38
60-70	8.66
70-80	4.68
80-90	2.09

Candela Tabulation

0	
0	1883.04
5	1835.92
15	1418.29
25	684.72
35	152.94
45	47.84
55	13.66
65	6.31
75	4.50
85	1.62
90	0.05

Coefficients of Utilization - Zonal Cavity Method
Effective Floor Cavity Reflectance 0.20

ROOM CAVITY RATIO	RC		80%				70%				50%				30%				10%				0%			
	RW	70%	50%	30%	10%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%				
0	119	119	119	119	119	117	117	117	117	111	111	111	107	107	107	102	102	102	102	102	102	100				
1	114	111	109	107	107	112	109	107	105	105	103	102	101	100	99	98	97	96	96	96	94					
2	109	104	100	97	107	102	99	96	99	96	94	94	96	94	92	93	92	90	88	88	88					
3	104	98	93	89	102	96	92	88	94	90	87	91	88	86	89	87	84	83	83	83	83					
4	99	92	87	83	97	91	86	82	89	85	81	87	83	80	85	82	79	78	78	78	78					
5	95	87	81	77	93	86	81	77	84	80	76	82	79	76	81	78	75	74	74	74	74					
6	90	82	76	72	89	81	76	72	80	75	72	78	74	71	77	74	71	69	69	69	69					
7	86	78	72	68	85	77	72	68	76	71	68	75	71	67	74	70	67	66	66	66	66					
8	83	74	68	65	82	73	68	64	72	68	64	71	67	64	70	67	64	62	62	62	62					
9	79	70	65	61	78	70	65	61	69	64	61	68	64	61	67	63	61	59	59	59	59					
10	76	67	62	58	75	67	62	58	66	61	58	65	61	58	65	61	58	56	56	56	56					

RC - Ceiling Cavity Reflectance

RW - Wall Reflectance

Cone of Light		
4.0	6.52 fc	14.1 ft
8.0	1.63 fc	28.2 ft
12.0	0.72 fc	42.3 ft
16.0	0.41 fc	56.5 ft
20.0	0.26 fc	70.6 ft
24.0	0.18 fc	84.7 ft
Distance to Plane	Initial Footcandle at Nadir	Beam diameter

BEAM DIA. MEASURED AT 50% OF NADIR F.C.