




**MULTILUMEN
SELECTOR**


**EASY 5 COLORS
SELECTOR**
2700K • 3000K • 3500K • 4000K • 5000K



DIMENSIONS

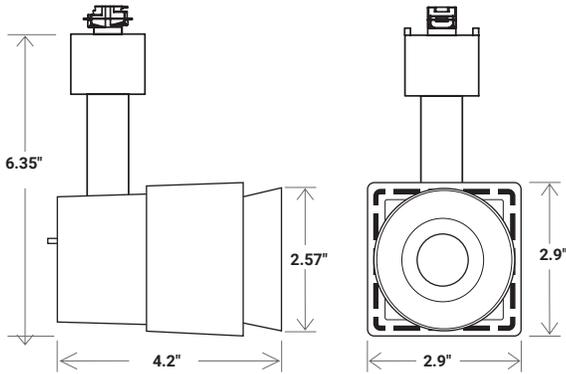

OPTICS

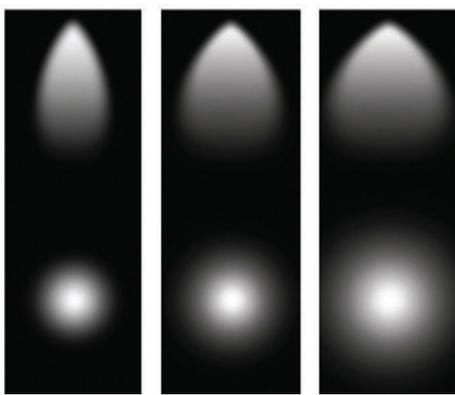

SP
Spot
15°

NFL
Narrow Flood
24°

FL
Flood
36°

NOMINAL LUMENS	DELIVERED LUMENS	WATTAGE
700L	700L	10W
1000L	1000L	14W
1300L	1300L	18W

Based on 4000K, 90+ CRI. Actual wattage may vary +/- 5%

FEATURES

A small profile LED track light that delivers optimal lumen output, with precise aiming for accent, task, or general illumination, integrating into any design. Track heads are adjustable up to 350 degrees horizontally, 90 degrees vertically, and are compatible with 1-circuit and 2-circuit track. With the use of a friction-based locking movement system, the head can be adjusted and re-adjusted to a precise position, delivering light where needed. Available in an array of color temperatures, it can accentuate the full spectrum of cool to warm tones, and is the perfect complement for retail merchandising, galleries, museums, supermarkets, hospitality, and commercial.

LUMENS	700L/1000L/1300L
CCT	27K/30K/35K/40K/50K
CRI	90+ Standard
COLOR QUALITY	2-Step MacAdam Ellipse
MOUNTING	Track
DIMMING	DIMTR 10% Triac Dimming at 120V
DISTRIBUTION	Spot (SP), Narrow Flood (NFL), Flood (FL)
AIMING	350° Horizontally, 90° Vertically
FINISH	Architectural White (AWH), Architectural Black (ABK)
LIFETIME	L70 at 50,000 Hours
PHOTOMETRIC	In accordance with IES LM79-08, LM80 and TM-30, TM-21



OPTICS

A polycarbonate optical refractor allows for precise beam control and even distribution, with a variety of lumen options.

Luminaire available in selectable lumens of 700L/1000L/1300L for customizable intensity with a variety of uses. Five selectable color temperatures of 2700K/3000K/3500K/4000K/5000K enable different warm to cool moods and atmospheres.

CCT factory set to 5000K; lumen factory set to 1300L.

CONSTRUCTION

All track heads are designed using a proprietary coolLED Advanced Thermodynamic Design. The track head body is constructed of extruded aluminum, with a die-cast custom designed concealed heat sink, providing a thermal management system that is engineered for extremely long life and service period.

Lumen and CCT switch located on back of luminaire.

Available in a white or black finish.

MAINTENANCE

Fixture can be regularly and safely wiped down to ensure optimal fixture performance.

OPTIONS & ACCESSORIES

Track heads may accommodate accessories. Please consult factory for standard or custom options.

TRACK COMPATIBILITY

Track heads are standard, with the compatibility for use with Mono-point, 1-Circuit, and 2-Circuit type H track.

DIMMING

DIMTR - 10% Triac dimming at 120V.

WARRANTY

5-year warranty for parts and components (labor not included).

LISTINGS

ETL listed.

Example: **ET-LED-398-700L/1000L/1300L-DIMTR-120-27K/30K/35K/40K/50K-90-FL-AWH**

ET-LED-398							
SERIES	LUMENS	DIMMING	VOLTAGE	CCT	CRI	OPTIC	FINISH
ET-LED-398	700L/1000L/1300L	DIMTR - Triac	120	27K/30K/35K/40K/50K	90	SP - Spot 15° NFL - Narrow Flood 24° FL - Flood 36°	ABK - Architectural Black AWH - Architectural White