

## Energy Efficient LED Pendants



INPUT VOLT.	INPUT FREQ.	INPUT CUR.	THD	POWER FACTOR	INPUT POWER	LUMENS
120/277	50/60Hz	83mA/36mA	<20%	>0.9	10W(+/-5%)	575

## DURABILITY

Die-cast aluminum housing and heat management system are engineered for extremely long life and service period. Without proper heat management, any LED luminaire will fail. Our die-cast system pulls the heat from the LED chip, allowing the continued cool operation for years. Life tests have shown the Elite **LED Lamp** light output will be maintained at 70% of initial at 50,000 hours of operation. Our superior design allows for installation in construction that requires the Elite Air-Shut™ system. Our LED driver is rated for 50 to 60 Hz at 120V input, produces less than 10% THD, has a power factor between 0.90 and 1.00 and is thermal protected for additional safety.

## REPEATABLE


Repeatability means quality. From our chip selection process, to our driver, to the thermal management, the Elite LED Lamp is engineered for quality. All Elite LED luminaires are rated at 85+ and 90+ CRI and 27K, 30K, 35K, 40K and 50K, as rated and tested to LM-79 and LM-80 standards by a certified laboratory, and meets the California Title-24 compliance standards. Elite's highly selective LED chips produce zero ultraviolet and virtually no infrared light.

## DIMMABLE

The Elite **LED Lamp** system is fully dimmable down to 10% of initial light output with a Triac dimmer when ordered with the following options (DIMTR-120). Dimmer control must have same AC input rating as the dimmable power supply driver it connects to. Other electronic low voltage dimmers may be compatible, but have not been tested by Elite LED Lighting.

## LISTING

UL/CUL listed

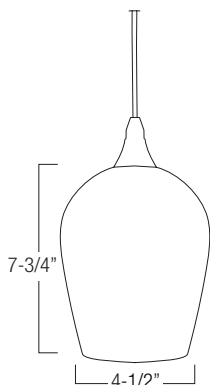

Example: ETP3-LED-650L-DIMTR-120-90CRI-30K-W-WH

TYPE	650L SERIES	CCT	CRI	FINISH
<input type="checkbox"/> ETP3-LED <input type="checkbox"/> ETP4-LED	<input type="checkbox"/> 650L-DIMTR-120 <input type="checkbox"/> 650L-277 (non dimmable)	<input type="checkbox"/> 27K <input type="checkbox"/> 30K <input type="checkbox"/> 35K	<input type="checkbox"/> 40K <input type="checkbox"/> 50K (CRI 85+ ONLY)	<input type="checkbox"/> 85+ <input type="checkbox"/> 90+
				<input type="checkbox"/> BLUE <input type="checkbox"/> WHITE <input type="checkbox"/> AMBER <input type="checkbox"/> RED <input type="checkbox"/> BROWN <input type="checkbox"/> BRWN/AMB

Ordering Example: ETP3-LED-Brown



ETP3-LED (Satin Nickel)  
-Canopy

## ITEM - Selector

ETP3-LED-Blue	5W Canopy LED Pendant
ETP3-LED-White	5W Canopy LED Pendant
ETP3-LED-Amber	5W Canopy LED Pendant
ETP3-LED-Red	5W Canopy LED Pendant
ETP3-LED-Brown	5W Canopy LED Pendant
ETP3-LED-Brwn/Amb	5W Canopy LED Pendant

Ordering Example: ETP4-LED-WH-Brown



TRACK ADAPTERS:  
ETP4-LED-WH (White)  
ETP4-LED-BK (Black)

## ITEM - Selector

ETP4-LED-____-Blue	5W LED Track Pendant
ETP4-LED-____-White	5W LED Track Pendant
ETP4-LED-____-Amber	5W LED Track Pendant
ETP4-LED-____-Red	5W LED Track Pendant
ETP4-LED-____-Brown	5W LED Track Pendant
ETP4-LED-____-Brwn/Amb	5W LED Track Pendant