



Features

- :: Easy-fit cover channel attachment.
- :: Tool-less wire-way access.
- :: Detachable channel cover gives hands-free wiring and quick installation.
- :: Romex/BX conduit connector included with every fixture.
- :: Soft-lumens, linear prismatic diffuser gives better visual comfort.
- :: Available with factory-installed lamp, rocker switch, cordset and outlet options.
- :: Knockouts available at the back, side and rear for easy installation
- :: Available keyhole mounting slots on the back
- :: Two level switch: high and low

Specifications

- :: Electrical
- Fixture conforms to UL 1570 and is suitable for damp locations.

Finish


U.V. coated rust resistance. Painted parts finished with polyester powder coating. 22 gauge die-formed steel housing.

listing

UL/C-UL listed and labeled.

Rep.Lamp Part#

BP-20W-120V-CL
BP-10W-120V-CL

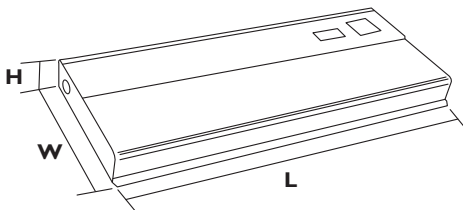

Example: **EUX-8-120**

TYPE	LAMP TYPE	VOLTAGE	OPTIONS	DIMENSION
<input type="checkbox"/> EUX-8	(1) 20W XENON	<input type="checkbox"/> 120 (STANDARD)	<input type="checkbox"/> CS 6', 3-wire grounded cordset	8-1/4" L X 3-1/2" W X 1-1/8" THICK
<input type="checkbox"/> EUX-12	(2) 20W XENON			12-1/4" L X 3-1/2" W X 1-1/8" THICK
<input type="checkbox"/> EUX-21	(3) 20W XENON			21-1/2" L X 3-1/2" W X 1-1/8" THICK
<input type="checkbox"/> EUX-30	(4) 20W XENON			30-1/2" L X 3-1/2" W X 1-1/8" THICK

