



ABOUT BOUNCE

The Bounce System redefines low-voltage lighting with a minimalist, modular approach. Utilizing a single load-bearing cable, the system simplifies installation and reduces structural impact. Spiral cable power transmission enables seamless connectivity between fixtures without additional wiring. Designed for flexibility, Bounce supports horizontal and vertical installations, adapting effortlessly to ceilings, walls, or floors.

Equipped with Spot and Flood luminaire options, Bounce delivers both precise accent lighting and broad area illumination. Its modular configuration allows easy expansion or reduction to suit dynamic spatial layouts—making it ideal for corridors, galleries, exhibition halls, and historical buildings with limited ceiling support or power access.

With a transparent structure and modern aesthetic, Bounce complements a wide range of interiors while maintaining high functionality.

PERFORMANCE

The Bounce Lighting System leverages premium LED chips from industry-leading brands, ensuring exceptional lighting quality and uniformity. Each luminaire is equipped with high-precision 3-step McAdam Eclipse LEDs, delivering superior color consistency across all fixtures and a high color rendering index (CRI 90+), making it ideal for applications demanding accurate color reproduction. The system supports a broad spectrum of color temperatures (2700K, 3000K, 4000K, 5000K, and 6000K), allowing for tailored ambiance and functional illumination. Models feature thoughtfully engineered beam angles for diverse application needs, ensuring both flexibility and optimal illumination throughout any space.

CONSTRUCTION

Constructed from high-grade ADC12 aluminum, Bounce offers the ideal balance of strength, lightness, and efficient thermal management. Available in pendant and surface-mount variants, the design accommodates easy installation and offers a 360-degree flexible angle in the pendant version, providing architects and designers with maximum versatility. To maintain fixture alignment and operational excellence, a maximum single-span steel wire length of 26' is recommended but can be tailored per project requirements. This customizable approach allows seamless integration into any environment.

FINISH

Bounce stands out with its premium sand-textured finish, available in refined Sand Black and Sand White options to suit a broad range of project aesthetics. The finish delivers both high visual appeal and enhanced durability, offering superior resistance to wear and environmental exposure. Complementary high-quality polycarbonate (PC) components contribute to both the fixture's style and structural integrity, reinforcing Bounce's reputation for lasting performance in demanding applications.

DRIVERS

Designed around a robust 48V DC input, the Bounce Lighting System's Elite driver is compatible with modern controls for seamless integration into advanced lighting systems ensuring stable and efficient operation. This enables energy savings, long-term reliability, and seamless integration into various lighting schemes. The Bounce Lighting system is powered by constant voltage drivers with a rating of 50/60Hz at a 120-277V. They produce less than 20% THD, have a 90% power factor, and are thermally protected for additional safety. Driver wattages range from 30W to 192W. They support both Triac dimming and 0-10V dimming with as low as 2% dimming. Higher Wattage options are available need to consult Elite customer.

CABLE SYSTEM ● BK (Black)

FBC-PC-2 / FBC-PC-3 / FBC-PC-4 | Retractable Power Cable






Dimension 2ft / 3ft / 4ft (unstretched)
Maximum Power 60W in One Circuit



FBC-SC | Solid System Base Cable

Dimension 25ft

ACCESSORIES - BOUNCE SYSTEM (FEED POWER) ● BK (Black) ○ WH (White)






FBC-ACC3-PF-L
Cylinder Feed Junction Box

FBC-ACC3-PF-S
Round Feed Junction Box

FBC-ACC3-PF-CM
Globe Feed Junction Box

ACCESSORIES - BOUCE SYSTEM BASE (PHYSICAL SUPPORT) ● BK (Black) ○ WH (White)





FBC-ACC3-BASE-L
Cylinder Base

FBC-ACC3-BASE-S
Round Base


FBC-ACC3-BASE-CM
Flat Base

INSTALLATION

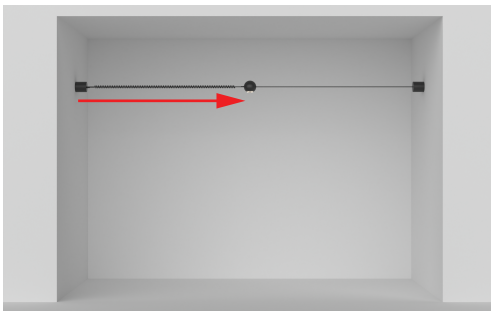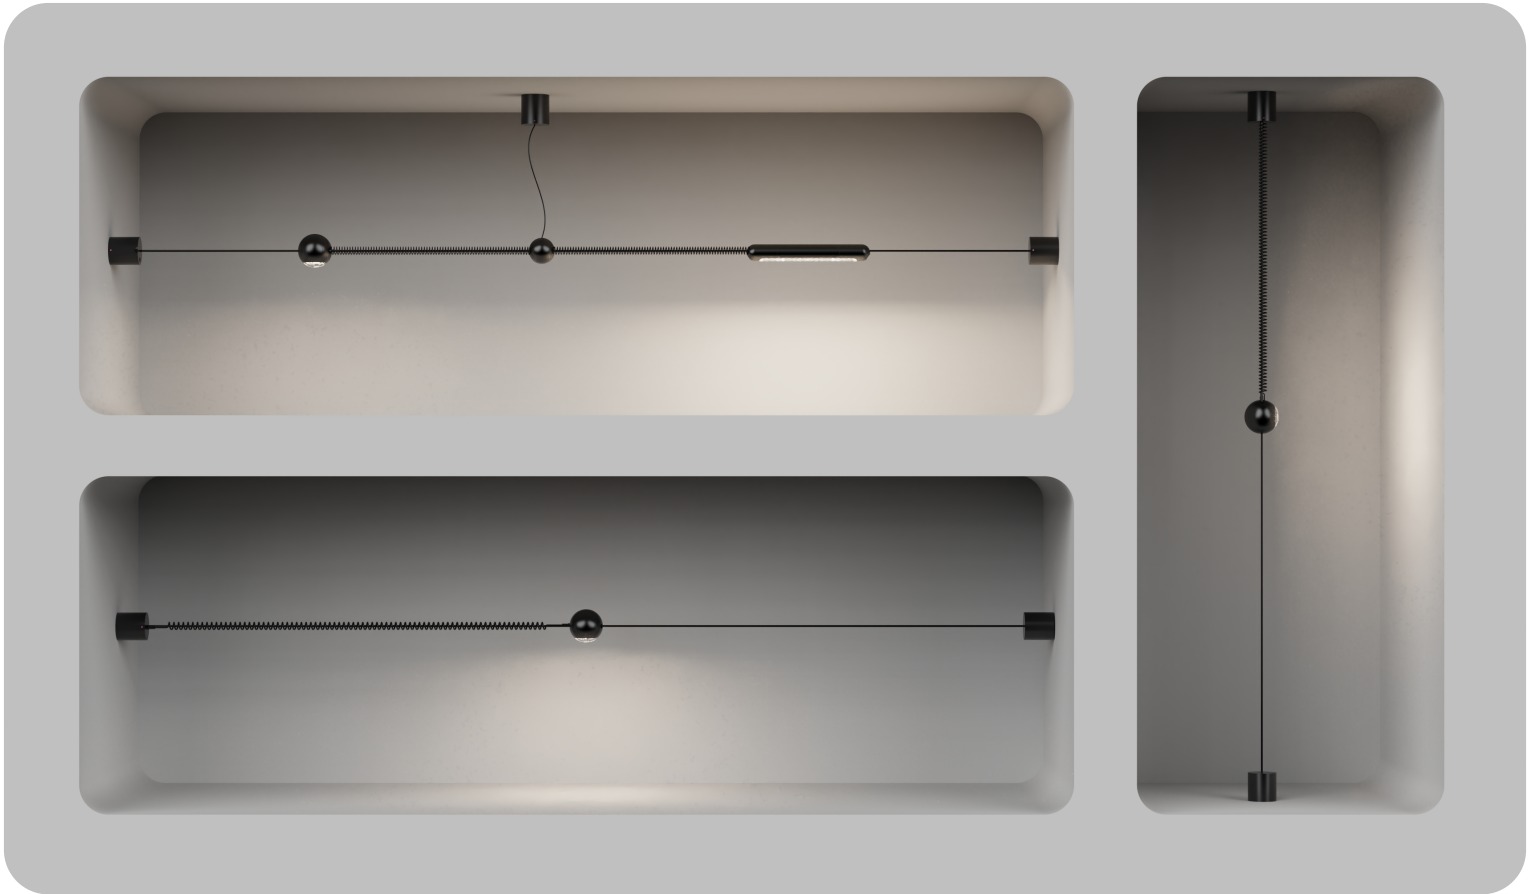


POWER FROM: WALL

Place holder Place holder Place holder Place holder Place holder
 Place holder Place holder Place holder Place holder Place holder
 Place holder Place holder Place holder Place holder Place holder
 Place holder Place holder Place holder Place holder Place holder
 Place holder Place holder Place holder Place holder Place holder
 Place holder Place holder

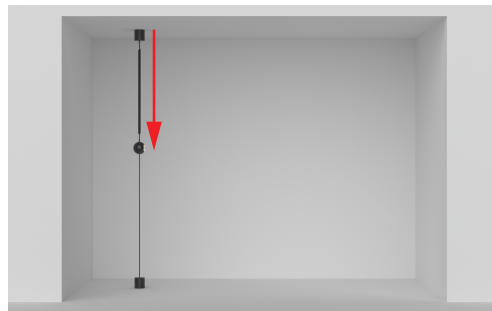

POWER FROM: CEILING

Place holder Place holder Place holder Place holder Place holder
 Place holder Place holder Place holder Place holder Place holder
 Place holder Place holder Place holder Place holder Place holder
 Place holder Place holder Place holder Place holder Place holder
 Place holder Place holder Place holder Place holder Place holder
 Place holder Place holder

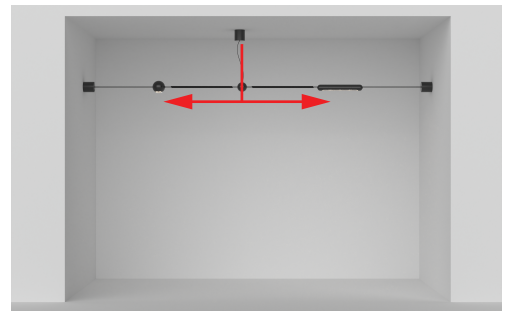


POWER FROM: MIDDLE

Place holder Place holder Place holder Place holder Place holder
 Place holder Place holder Place holder Place holder Place holder
 Place holder Place holder Place holder Place holder Place holder
 Place holder Place holder Place holder Place holder Place holder
 Place holder Place holder Place holder Place holder Place holder
 Place holder Place holder

1. 96W REMOTE DRIVER, 1 CHANNEL


Maximum Length = 9.8ft, Maximum 6 Fixtures

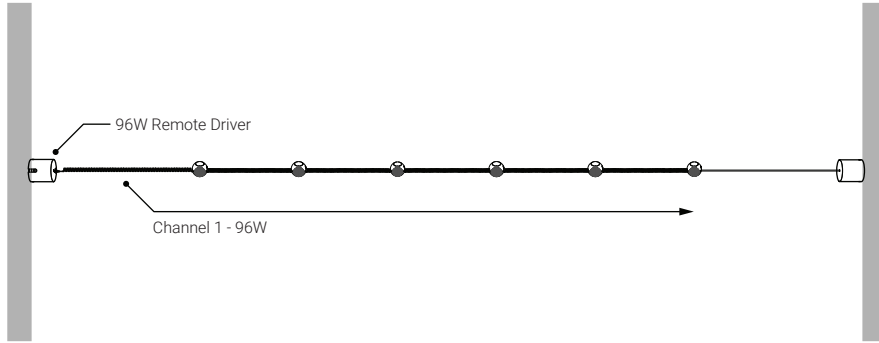

2. 96W REMOTE DRIVERS, 2 CHANNELS

Maximum Length = 19.7ft, Maximum 12 Fixtures

Disconnect two channels in the middle

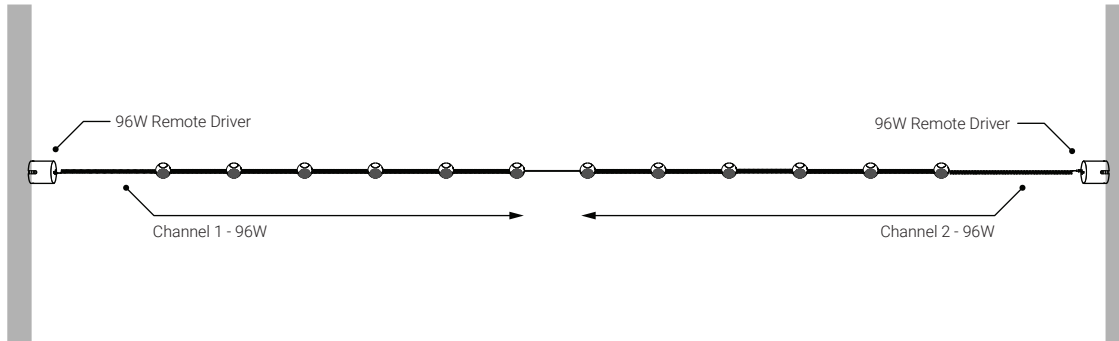

3. 96W REMOTE DRIVERS, 2 CHANNELS

Maximum Length = 25ft, Maximum 18 Fixtures

Disconnect power in the middle

