


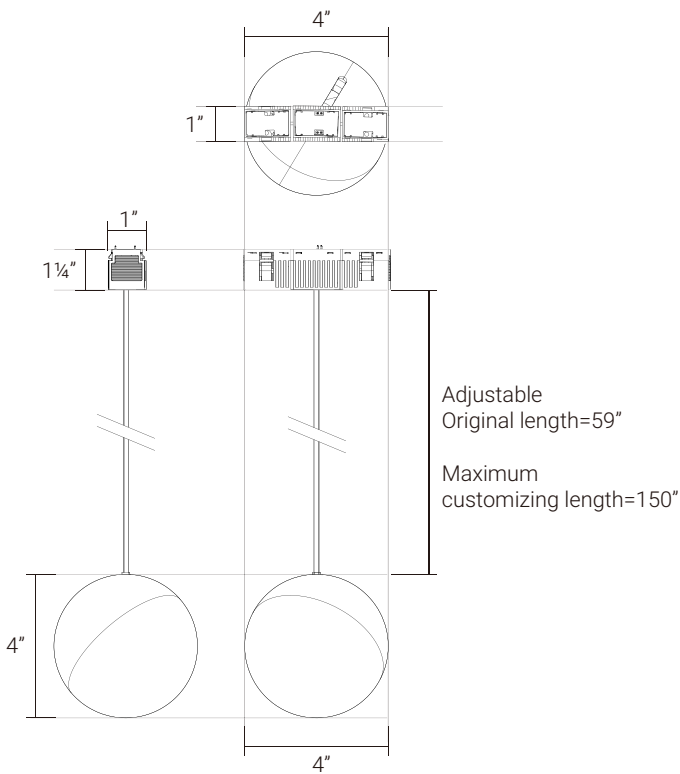

SERIES	LUMENS	WATTAGE
FG-R-P4-1	300lm	9W

Based on 4000K, 90+ CRI. Actual wattage may vary +/- 5%

GROOVE CURVE 'PENDANT GLOBE' SERIES

The FG-R-P4-1 Pendant Globe Luminaire is designed with a unique spherical construction and rotational capabilities that can be utilized to provide a soft downlight glow or focused on a wall or object to elegantly illuminate your space.

This decorative piece can be installed individually or combined with other Groove system track luminaires to create the perfect design. For a dynamic arrangement, it is recommended to use the FG-R-P4-1 as statement pieces between your choice of other linear, pendant, or recessed, or standard track luminaires.

SERIES	Groove Curve - 'Pendant Globe' Series
SIZE	4"
OPERATING VOLTAGE	48V DC
OUTPUT VOLTAGE	120-277V AC
CCT	2700K, 3000K, 3500K, 4000K, 5000K
CRI	90+
COLOR QUALITY	2-Step MacAdam Ellipse
FINISH	☐ WH-BK (White+Black) ● BK-BK (Black)
DIMMING	DIM10 - (0-10V Dimming), DIMTR, DALI 2, BLE
LIFETIME	L70 at 60,000 Hours
LISTING	5-year pro-rated warranty. ETL Listed. Title 24 Compliant. Assembled in America. Class 2, Title 24 JA8 listed
PHOTOMETRIC TESTS	In accordance with IES LM79-08, LM80 and TM-30, TM-21

FEATURES OF GROOVE FAMILY

The Groove Curve 48V Track System offers seamless curved track solutions for modern lighting design.

FLEXIBLE AND CREATIVE: Groove Curve connects curved and straight tracks at various angles and diameters to create complete circular shapes and custom curved layouts.

VERSATILE AND PRECISE: Groove Curve tracks support a wide range of interchangeable luminaires with flexible adapters to allow easy repositioning and replacement.

Available in Trimless Recessed, Ceiling Mount, and Suspended Mount options. Fixtures can be mounted individually or in continuous runs for curved paths of smooth, uninterrupted illumination.

THE ORIGINAL GROOVE 48V DC TRACK SYSTEM

The Groove 48V DC track system combines sleek, minimal profiles with the convenience and versatility of easily interchangeable click-in track heads.

Designed for easy customization, Groove is available with a suite of in-line linear, adjustable linear, spot, pendant, cylinder, and suspended track heads which can be seamlessly clicked-in or removed to meet the needs of any project, current or future. Track head accessories include a variety of field-changeable optics, including TIR and diffuser options, and even spot, flood, snoot, and wall-wash accessories.

As a result, Groove can be used for accent, task, and general illumination in galleries and museums or hospitality, retail, corporate, and residential spaces.

- Single drivers can power runs up to 65' long at 480 watts
- Discreet integrated or remote driver options keep track lines clean
- Connector accessories like T, X, and L corners can be used to tailor designs into custom rectangular, square, or linear patterns, or even build wall to ceiling or wrap configurations
- Multiple lumen packages and distribution options available
- Available in Trimless Recessed, Recessed Flanged, Ceiling/ Surface, and Suspended options
- Suspended and surface mounting options can be used for wood, drywall or T-Bar ceilings

For more details refer to individual track head spec sheets.

CONSTRUCTION

All Groove track heads are engineered for long lifespans and reduced maintenance through the use of coolLED's Advanced Thermodynamic Design, which includes an extruded aluminum body, a hidden die-cast heat sink, and thermal management system.

LED MODULE PERFORMANCE

The Groove Blade System's luminaires are equipped with 2-step McAdam Eclipse LEDs, which provide consistent color across all fixtures, and 90+CRI. The LEDs are available in a variety of kelvin temperature options.

DRIVERS

The Groove Blade System is powered by constant voltage drivers with a rating of 50/60Hz at a 120/277V input and a 48V output. They produce less than 20% THD, have a 90% power factor, and are thermally protected for additional safety. Driver wattages range from 75W to 450W and can power up to 65' of track. Groove drivers can be installed internally within the track or remotely mounted, and are available in 0-10V 1% Dimming, Dali Dimming, or 120V On/ Off Non-Dimming Driver. Please see Groove track system spec sheets for a complete list of drivers and capabilities.

FINISH

Luminaires are available in a powder-coated black or white post-paint finish. They may also be issued in custom RAL colors upon request. Consult the factory to find out which custom colors can be accommodated.

DIMMING INFORMATION

DIM10 - 0-10V dimming on either MVOLT 120, 277. Dimmable down to 1% of initial lumens, standard. Available in 75W, 100W, 150W, and 240W.
DIMTR - Electronic low voltage dimming. Available in 120V.
DALI - DALI DT6 dimming down to 1% Available in 75W, 100W, 150W, and 240W.
EldoLED PowerDrive dimming down to 0.1%. Please see the EldoLED website for wiring diagrams and a full list of compatible DMX and DALI control systems.

WARRANTY

5-year warranty for parts and components (labor not included).

EXAMPLE:				
SERIES	CCT	CRI	FINISH	OPTION
FG-R-P4-1	☐ 27K ☐ 30K ☐ 35K ☐ 40K ☐ 50K	☐ 90	☐ WH-BK (White+Black) ☐ BK-BK (Black)	☐ 48V ☐ 48V-BLE (Bluetooth) *Power supply must be ordered







ANSI/IES TM-30-18 Color Rendition Report

Source: LED-PCB

Manufacturer:

Date: 2024/12/3

Model: CRI:90 CCT:3000K

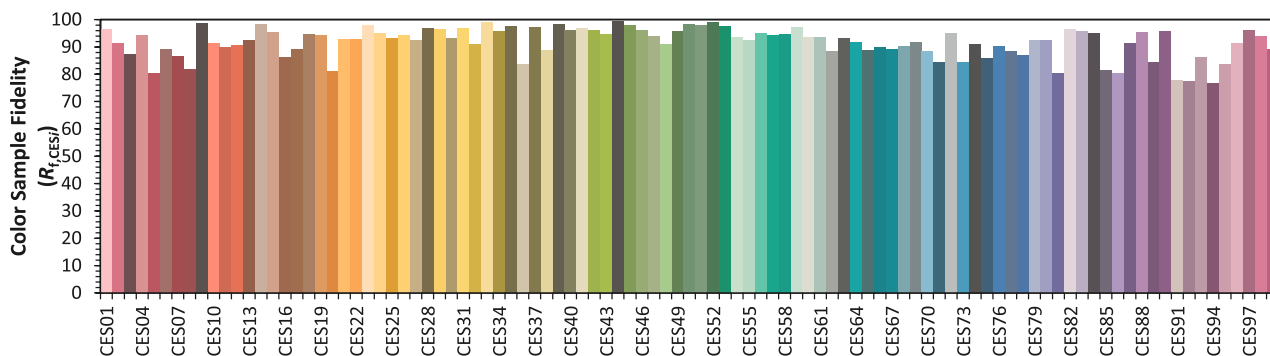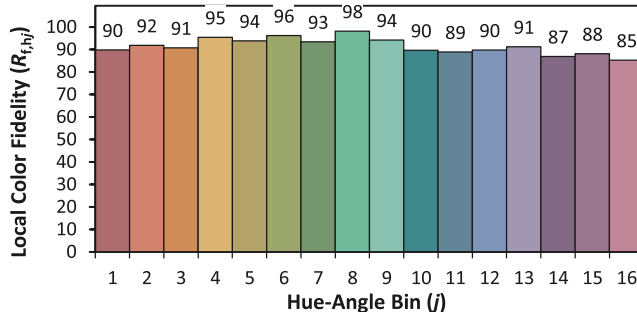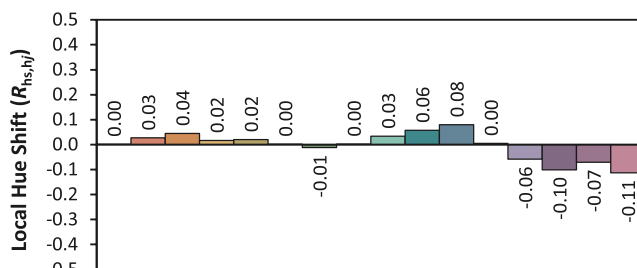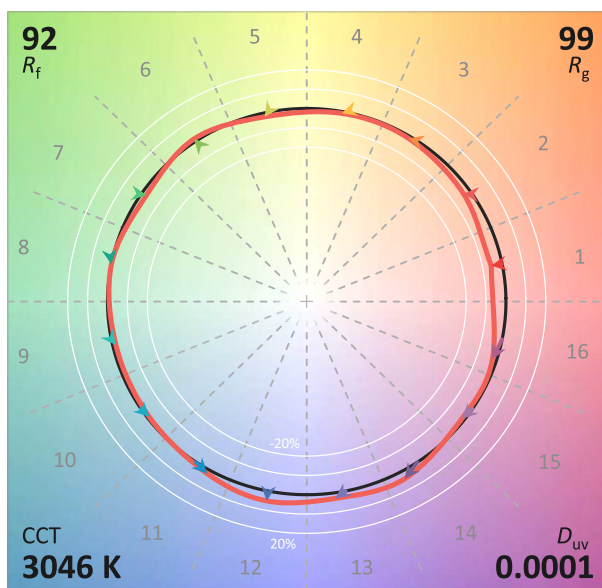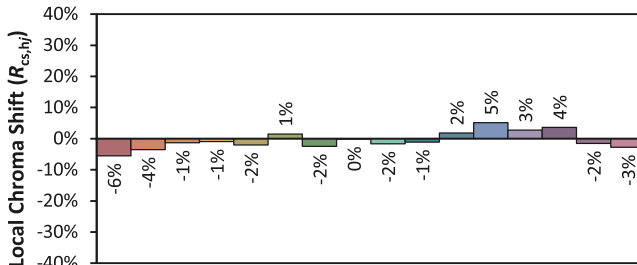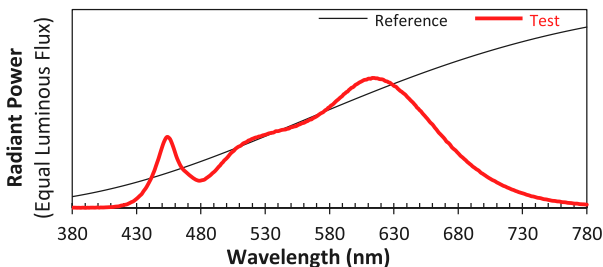

Notes: This is a recommended method for displaying ANSI/IES TM-30-18 information.

x 0.4339

y 0.4033

u' 0.2489

v' 0.5206

CIE 13.3-1995
(CRI)

R_a 93


R_g 52

Colors are for visual orientation purposes only. Created with the ANSI/IES TM-30-18 Calculator Version 2.00.

GROOVE CURVE LUMINAIRE OPTIONS



FG-R-L4R-8
Linear Downlight



FG-LS-3
Linear Silicone 3ft



FG-LS-6
Linear Silicone 6ft



FG-LS-9
Linear Silicone 9ft



FG-R-T1-1
Recessed Track Light



FG-R-T2-2
Cylinder



FG-R-T3-1
Cylinder



FG-R-T3-2
Cylinder




FG-R-T4-1
Beam Adjustable Cylinder



FG-R-T4-2
Beam Adjustable Cylinder



FG-R-T5-1
Flat Round



FG-R-T5-2
Flat Round



FG-R-T6-1
Flat Square



FG-R-T7-1
Square Track Light



FG-R-T7-2
Rectangle Track Light



FG-R-T8-1
Track Globe



FG-R-T9-1
Track Globe



FG-R-T10-1
Track Downlight




FG-R-T11-1
Globe



FG-R-WL-1
Wall Light



FG-R-LL-1
Line Light



FG-R-TPJ-1
Form Projector



FG-R-TPJ-2
Gobo Projector



FG-R-P1-1/2
Pendant




FG-R-P3-1/2
Pendant



FG-R-P4-1
Pendant Globe




FG-R-P4-2
Pendant Globe



FG-R-P4-3
Pendant Globe



FG-R-P5-1
Globe



FG-R-P9-1
Pendant Flat Round

FG-R-P4-1-40K-90

TEST NO.: **220062**


INPUT WATTS: 9.3

LUMENS: 309

EFFICACY: 33

BEAM ANGLE: 162

SPACING CRITERIA: 1.34



CANDELA TABLE

	0°	90°
0°	70	70
10°	69	70
20°	67	68
30°	63	65
40°	58	61
50°	53	56
60°	47	50
70°	41	44
80°	34	37
90°	27	30

LUMINANCE (cd/sq.m)

	0.00°	90.00°
0.00°	2411401	2411401
45.00°	2704737	2834111
55.00°	2990931	3161176
65.00°	3566366	3801475
75.00°	4993392	5385238
85.00°	12131656	13307082

LUMENS PER ZONE

ZONE	LUMENS
0° - 10°	7
10° - 20°	19
20° - 30°	31
30° - 40°	39
40° - 50°	44
50° - 60°	46
60° - 70°	45
70° - 80°	42
80° - 90°	36

ZONAL LUMEN SUMMARY

ZONE	UMENS	% LUMINAIRE
0° - 20°	26	8%
0° - 30°	57	18%
0° - 40°	96	31%
0° - 60°	186	60%
0° - 80°	274	89%
0° - 90°	309	100%

CONE OF LIGHT

MOUNTING HEIGHT	FC AT BEAM CENTER	BEAM DIA. 0°-180°	BEAM DIA. 90°-270°
6.0 ft	2.0 fc	84.4 ft	82.9 ft
8.0 ft	1.1 fc	112.6 ft	110.5 ft
10.0 ft	0.7 fc	140.7 ft	138.1 ft
12.0 ft	0.5 fc	168.8 ft	165.8 ft
14.0 ft	0.4 fc	197.0 ft	193.4 ft
16.0 ft	0.3 fc	225.1 ft	221.0 ft
18.0 ft	0.2 fc	253.3 ft	248.6 ft
20.0 ft	0.2 fc	281.4 ft	276.3 ft

INDOOR COEFFICIENTS OF UTILIZATION

pf pc pw	80%										20%										0%												
	70%	50%	30%	10%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	102	100	100	100	100	100	100	100	100	100	100	100	100	100	100	100
1	104	97	90	85	100	94	88	83	90	85	80	86	82	78	82	78	75	73	73	73	73	73	73	73	73	73	73	73	73	73	73	73	73
2	92	81	72	65	89	79	71	64	76	69	63	72	66	61	69	64	60	57	57	57	57	57	57	57	57	57	57	57	57	57	57	57	57
3	83	70	60	52	80	68	59	51	65	57	50	62	55	49	59	53	48	46	46	46	46	46	46	46	46	46	46	46	46	46	46	46	46
4	75	61	51	43	73	60	50	42	57	48	42	54	47	41	52	46	40	38	38	38	38	38	38	38	38	38	38	38	38	38	38	38	38
5	69	54	44	36	67	53	43	36	51	42	35	48	41	35	46	40	34	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32
6	63	48	38	31	61	47	38	31	45	37	30	44	36	30	42	35	30	28	28	28	28	28	28	28	28	28	28	28	28	28	28	28	28
7	59	44	34	27	57	43	33	27	41	33	27	40	32	26	38	31	26	24	24	24	24	24	24	24	24	24	24	24	24	24	24	24	24
8	54	40	30	24	53	39	30	24	37	29	24	36	29	23	35	28	23	21	21	21	21	21	21	21	21	21	21	21	21	21	21	21	21
9	51	36	27	21	49	36	27	21	34	27	21	33	26	21	32	26	21	19	19	19	19	19	19	19	19	19	19	19	19	19	19	19	19
10	48	33	25	19	46	33	25	19	32	24	19	31	24	19	30	23	19	17	17	17	17	17	17	17	17	17	17	17	17	17	17	17	17