

FEATURES


FPR2-Rhapsody is a small profile LED pendant mounted luminaire that delivers optimal lumen output for general illumination while providing the solution to high noise levels found in open, multi-functional spaces. Available in an array of color temperatures, it can accentuate the full spectrum of cool to warm tones and is the perfect complement for commercial, retail, hospitality, or high-end residential applications. The sound absorbing material consists of 9mm thick PET felt, with 50% post-consumer recycled content: a strong, durable and versatile product that is available in multiple color variations.

LUMENS	1200, 1800, 2200, 3000
CCT & DYNAMIC	27K, 30K, 35K, 40K, 50K WDM 30K-18K, Vibrant Series: CW (42K), RG (37K)
CRI	90+
COLOR QUALITY	2 Step MacAdam Ellipse
DISTRIBUTION	Spot (15°), Narrow Flood (25°), Flood (38°)
MOUNTING	Suspended, Pendant
FINISH	AWH (Architectural White) ABK (Architectural Black) Custom RAL
DIMMING	DIM10 (0-10V Dimming), DIMTR (Triac Dimming)
MATERIAL COLORS	Refer to SoftSense Material Color Chart
LIFETIME	L70 at 100,000 Hours
PHOTOMETRIC TESTS	In Accordance with IES LM79-08, LM80 and TM-30, TM-21

NOMINAL LUMENS	DELIVERED LUMENS	WATTAGE
3000	3037	42.5 W
2200	2506	32.4 W
1800	1862	21.7 W
1200	1198	13.4 W

Based on 3000K, 90+ CRI. Actual wattage may vary +/- 5%

CANDLEPOWER DISTRIBUTION CURVES

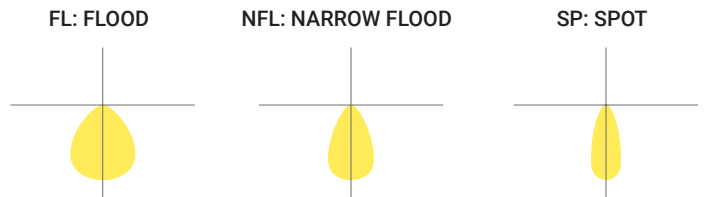

Reference IES files for additional distribution curve information.



PERFORMANCE

Available in eight color temperatures: (CW) Crisp White, (RG) Red Glow, (WDM) Warm Dim and 2700K, 3000K, 3500K, 4000K, and 5000K

Crisp White is ideal for retail applications, especially jewelry stores. Our Crisp White technology is designed to accentuate the full spectrum, enhancing cool tones such as blues and greens to be vibrant, and warm tones such as red and orange to be vivid.

Red Glow technology is designed to be used in restaurants and grocery stores, enhancing products in the produce, meat, fish, and poultry departments.

Warm Dim with Smart Dim technology mimics traditional incandescent halogen lighting through dimming. Using Warm Dim, luminaires shift over the black body radiator curve as the light dims, transitioning into the rich amber tones that encourage relaxation. Ideal for hospitality, commercial, and residential applications, it maintains a high lumen output and comes paired with a high CRI of 90+ that guarantees color consistency within a 2 Step MacAdam Ellipse.

OPTICS

A polycarbonate optical refractor allows for precise beam control and even distribution, with a variety of lumen options. Optics are field changeable and available in NS (Narrow Spot), FL (Flood), and WFL (Wide Flood) options.

CONSTRUCTION




Post-painted powder coated extruded aluminum body. Available in White, Black, and custom RAL colors.

ACOUSTIC MATERIAL

Acoustic material is made from 100% polyethylene terephthalate (PET), with 50% post-consumer recycled material. PET is a moisture resistant green product with no added chemicals, binders, adhesives or dyes.

SOUND ABSORPTION RESULTS (from left to right)

- A** - acoustic performance
Linear Felt Fixtures, alternating with / without light fixtures (8 units total)
- B** - spaced 12" on center
- C** - spaced 18" on center

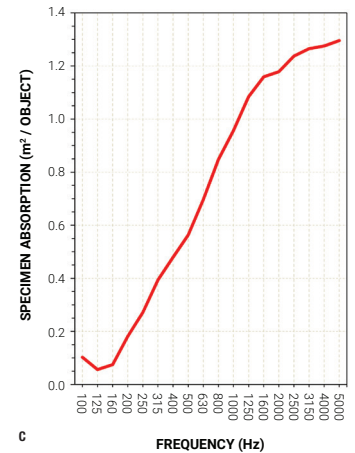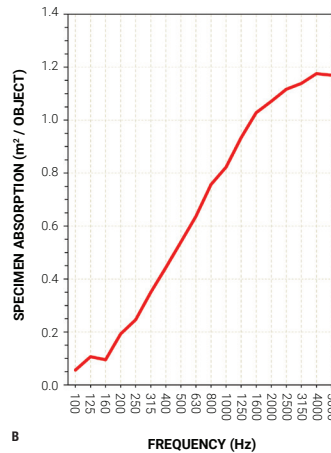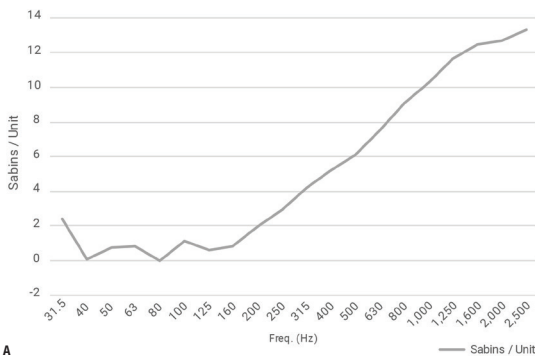

DIMMING & DRIVER INFORMATION

DIM10 - Flicker Free 1% Dimming Standard (DIM10) 0-10V dimming on either MVOLT or 120V.

DIMTR - Triac & Electronic low voltage dimming. Available in 120V.

MOUNTING

- Offered in various mounting options including cable, stem, and surface
- Cable / Pendant mount supplied with complete canopy assembly and matched to housing finish
- Cable mount height can be field adjusted up to 9ft.

MOUNTING BRACKET AND SUSPENSION SYSTEM

Pendant mounted option is supplied with a 10 ft. adjustable aircraft cable and power cord, which can be field adjusted for desired length. Please consult factory for custom mounting and stem options.

WARRANTY

All Fusion Pendants are designed using a proprietary coolLED advanced thermodynamic design heat management system that is engineered for an extremely long life and service period. Five-year warranty for parts and components. (Labor not included)

LISTINGS

c-UL-us - Listed for Feed Through Wiring.
UI Listed for Damp location


MAINTENANCE

Acoustic material can be cleaned with a clean, soft, lint-free cloth or a vacuum.

OPTIONS

Available without light source.

Example: **FPR2-RHAPSODY-SOFT-BLADE-1200L-DIM10-MVOLT-NFL-35K-90-WH-GRN**

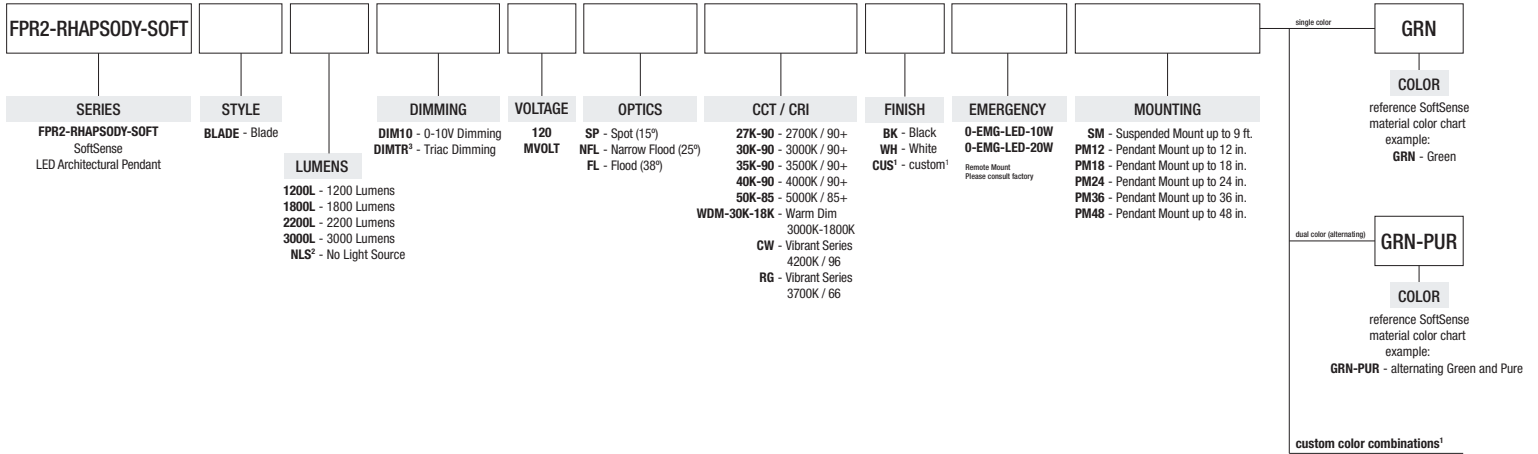


¹ Consult Factory
² No Light Source, please skip to "Mounting"
³ DIMTR available in 120V

QUICK SHIP COLORS



STANDARD COLORS

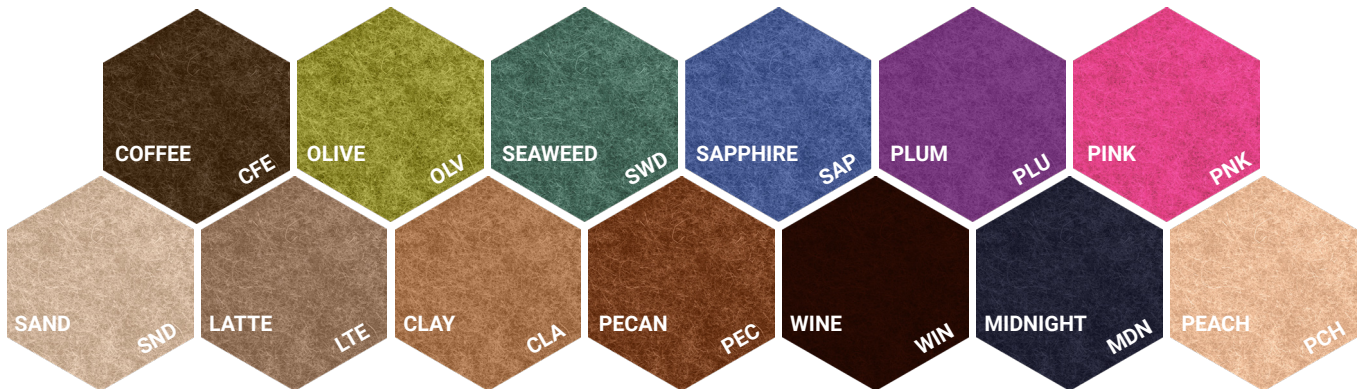

CUSTOM COLORS


Please consult factory for lead time and pricing.

TEST NO.: **EL061863**

FPR2-RHAPSODY-SOFT-1800L-DIM10-MVOLT-FL-40K-90-WH

INPUT WATTS: **21.7** LUMENS: **1862** CRI: **90** EFFICACY: **86** CCT: **4000K** SPACING CRITERIA: **0.46**

Candle Power Distribution (Candelas)



Cone of Light		
4.0	25.4 fc	8.1 ft
8.0	6.36 fc	16.3 ft
12.0	2.83 fc	24.4 ft
16.0	1.59 fc	32.5 ft
20.0	1.02 fc	40.7 ft
24.0	0.71 fc	48.8 ft
Distance to Plane	Initial Footcandle at Nadir	Beam diameter

BEAM DIA. MEASURED AT 50% OF NADIR F.C.

Zonal Lumens Summary

Zone	Lumens	%Lamp	%Fixt
0-20	1387.36	76.60	74.50
0-30	1749.14	96.60	93.90
0-40	1819.66	100.50	97.70
0-60	1852.14	102.30	99.50
0-80	1860.53	102.80	99.90
0-90	1862.22	102.90	100.00

Luminance (Average candela/M²)

Angle in Degrees	Average		
	0°	45°	90°
45	3666	4355	9636
55	1640	2085	2229
65	1377	1419	1877
75	1409	1695	1817
85	1197	3275	3534

Lumens Per Zone

Zone	Lumens
0-10	570.06
10-20	817.30
20-30	361.78
30-40	70.52
40-50	23.95
50-60	8.53
60-70	5.11
70-80	3.28
80-90	1.68

Candela Tabulation

0	10	20	30	40	50	60	70	80	90
0	7349.16	5	6508.68	15	2736.30	25	721.22	35	57.16
45	20.62	55	7.48	65	4.63	75	2.90	85	0.83
85	0.05	90							

Coefficients of Utilization - Zonal Cavity Method

Effective Floor Cavity Reflectance 0.20

ROOM CAVITY RATIO	RC	80%				70%				50%				30%				10%				0%			
		RW	70%	50%	30%	10%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%	30%	10%	0%		
0	122	122	122	122	120	120	120	120	114	114	114	109	109	109	105	105	105	105	105	105	103				
1	118	116	114	112	116	114	112	110	109	108	107	106	105	104	102	101	101	101	101	101	99				
2	114	110	107	104	112	108	105	103	105	103	101	102	100	99	99	98	97	95	95	95	97				
3	110	105	101	98	108	104	100	97	101	98	96	99	96	94	96	94	93	91	91	91	93				
4	106	100	96	93	105	99	95	92	97	94	91	95	93	90	94	91	89	88	88	88	91				
5	103	96	92	89	101	96	91	88	94	90	88	92	89	87	91	88	86	85	85	85	88				
6	100	93	88	85	98	92	88	85	91	87	84	89	86	84	88	85	83	82	82	82	85				
7	97	90	85	82	95	89	85	82	88	84	81	87	83	81	86	83	81	79	79	79	81				
8	94	87	82	79	93	86	82	79	85	81	79	84	81	78	83	80	78	77	77	77	79				
9	91	84	79	76	90	83	79	76	83	79	76	82	78	76	81	78	76	75	75	75	77				
10	88	81	77	74	88	81	77	74	80	76	74	79	76	74	79	76	73	72	72	72					


RC - Ceiling Cavity Reflectance RW - Wall Reflectance

FPR2-RHAPSODY-SOFT-1200L-DIM10-MVOLT-FL-40K-90-WH

TEST NO.: **EL061856**

INPUT WATTS: **13.4** LUMENS: **1198** CRI: **90** EFFICACY: **89** CCT: **4000K** SPACING CRITERIA: **0.46**

Candle Power Distribution (Candelas)



Cone of Light		
4.0	16.5 fc	8.1 ft
8.0	4.12 fc	16.2 ft
12.0	1.83 fc	24.2 ft
16.0	1.03 fc	32.2 ft
20.0	0.66 fc	40.4 ft
24.0	0.46 fc	48.5 ft
Distance to Plane	Initial Footcandle at Nadir	Beam diameter

BEAM DIA. MEASURED AT 50% OF NADIR F.C.

Zonal Lumens Summary

Zone	Lumens	%Lamp	%Fixt
0-20	894.86	76.20	74.70
0-30	1122.47	95.60	93.70
0-40	1166.47	99.30	97.40
0-60	1189.58	101.30	99.30
0-80	1196.28	101.80	99.90
0-90	1197.51	102.00	100.00

Luminance (Average candela/M²)

Angle in Degrees	Average		
	0°	45°	90°
45	2119	2311	4769
55	1035	1207	1274
65	865	862	1094
75	794	920	1061
85	453	1700	1915

Lumens Per Zone

Zone	Lumens
0-10	370.22
10-20	524.64
20-30	227.61
30-40	44.00
40-50	16.42
50-60	6.69
60-70	4.10
70-80	2.60
80-90	1.24

Candela Tabulation

0	10	20	30	40	50	60	70	80	90
0	4767.16	5	4340.53	15	1764.29	25	442.70	35	40.88
45	15.17	55	6.01	65	3.70	75	2.08	85	0.40
85	0.03	90							

Coefficients of Utilization - Zonal Cavity Method

Effective Floor Cavity Reflectance 0.20

ROOM CAVITY RATIO	RC	80%				70%				50%				30%				10%				0%			
		RW	70%	50%	30%	10%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%	30%	10%	0%		
0	121	121	121	121	119	119	119	119	113	113	113	108	108	108	104	104	104	104	104	104	102				
1	117	115	113	111	115	113	111	109	108	107	106	105	104	103	101	101	101	101	101	101	99				
2	113	109	106	103	111	107	104	102	104	102	100	101	99	98	98	97	96	94	94	94	96				
3	109	104	100	97	107	103	99	96	100	97	95	98	95	93	96	94	92	91	91	91	93				
4	105	100	95	92	104	98	95	92	96	93	91	95	92	90	93	90	89	87	87	87	90				
5	102	96	91	88	101	95	91	88	93	90	87	92	88	86	90	87	85	84	84	84	87				
6	99	92	88	84	97	91	87	84	90	86	84	89	85	83	87	85	82	81	81	81	84				
7	96	89	84	81	95	88	84	81	87	83	81	86	83	80	85	82	80	79	79	79	81				
8	93	86	81	78	92	85	81	78	84	81	78	83	80	78	83	80	77	76	76	76	78				
9	90	83	79	76	89	83	78	76	82	78	75	81	78	75	80	77	75	74	74	74	76				
10	88	81	76	73	87	80	76	73	79	76	73	79	75	73	78	75	73	72	72	72					


RC - Ceiling Cavity Reflectance RW - Wall Reflectance

FPR2-RHAPSODY-SOFT-2200L-DIM10-MVOLT-FL-40K-90-WH

TEST NO.: **EL061859**

INPUT WATTS: **32.4** LUMENS: **2506** CRI: **90** EFFICACY: **77** CCT: **4000K** SPACING CRITERIA: **0.46**

Candle Power Distribution (Candelas)



Cone of Light		
4.0	35.3 fc	8.1 ft
8.0	8.84 fc	16.1 ft
12.0	3.93 fc	24.2 ft
16.0	2.21 fc	32.3 ft
20.0	1.41 fc	40.4 ft
24.0	0.98 fc	48.4 ft
Distance to Plane	Initial Footcandle at Nadir	Beam diameter

BEAM DIA. MEASURED AT 50% OF NADIR F.C.

Zonal Lumens Summary

Zone	Lumens	%Lamp	%Fixt
0-20	1820.94	74.90	72.70
0-30	2338.93	96.20	93.30
0-40	2442.99	100.50	97.50
0-60	2490.33	102.50	99.40
0-80	2503.31	103.00	99.90
0-90	2505.76	103.10	100.00

Luminance (Average candela/M²)

Angle in Degrees	Average		
	0°	45°	90°
45	4278	5033	9625
55	2013	2508	2710
65	1727	1734	2238
75	1721	1984	2095
85	1201	3682	3932

Lumens Per Zone

Zone	Lumens
0-10	699.52
10-20	1121.42

FPR2-RHAPSODY-SOFT-3000L-DIM10-MVOLT-NS-40K-90-WH

INPUT WATTS: **42.8**

LUMENS: **3181**

CRI: **90**


EFFICACY: **74**

CCT: **4000K**

TEST NO.: **EL061855**

SPACING CRITERIA: **0.30**

Candle Power Distribution (Candelas)



Cone of Light		
4.0	81.6 fc	4.6 ft
8.0	20.4 fc	9.1 ft
12.0	9.07 fc	13.7 ft
16.0	5.1 fc	18.2 ft
20.0	3.27 fc	22.8 ft
24.0	2.27 fc	27.3 ft
Distance to Plane	Initial Footcandle at Nadir	Beam diameter

BEAM DIA. MEASURED AT 50% OF NADIR F.C.

Zonal Lumens Summary

Zone	Lumens	%Lamp	%Fixt
0-20	2420.72	80.70	76.10
0-30	2984.96	99.50	93.80
0-40	3109.5	103.60	97.80
0-60	3161.54	105.30	99.40
0-80	3177.58	105.90	99.90
0-90	3180.77	106.00	100.00

Luminance (Average candela/M²)

Angle in Degrees	Average		
	0°	45°	90°
45	7355	5044	4557
55	2320	2358	2177
65	2360	1925	2246
75	2703	2244	2238
85	5032	4418	1805

Lumens Per Zone

Zone	Lumens
0-10	1118.53
10-20	1302.19
20-30	564.24
30-40	124.54
40-50	38.82
50-60	13.22
60-70	9.42
70-80	6.62
80-90	3.18

Candela Tabulation

0	
0	23591.197
5	7540.987
15	3773.290
25	961.760
35	127.701
45	52.664
55	13.475
65	10.102
75	7.085
85	4.441
90	3.119

Coefficients of Utilization - Zonal Cavity Method

Effective Floor Cavity Reflectance 0.20

ROOM CAVITY RATIO	RC	80%				70%				50%				30%				10%				0%			
		RW	70%	50%	30%	10%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%					
0	126	126	126	126	126	123	123	123	123	118	118	118	113	113	113	108	108	108	106						
1	122	119	117	115	115	119	117	115	114	113	112	110	109	108	107	105	105	104	102						
2	118	114	110	108	108	115	112	109	106	109	106	104	104	104	102	103	101	100	98						
3	114	109	105	102	102	112	107	104	101	105	102	99	102	100	98	100	98	96	95						
4	110	104	100	97	97	108	103	99	96	101	98	95	99	96	94	97	95	93	92						
5	107	100	96	93	93	105	99	95	92	98	94	91	96	93	91	95	92	90	89						
6	103	97	92	89	89	102	96	92	89	95	91	88	93	90	88	92	89	87	86						
7	101	94	89	86	86	99	93	89	86	92	88	85	91	87	85	90	87	84	83						
8	98	91	86	83	83	97	90	86	83	89	85	83	88	85	82	87	84	82	81						
9	95	88	83	80	80	94	87	83	80	87	83	80	86	82	80	85	82	80	79						
10	93	85	81	78	78	92	85	81	78	84	80	78	84	80	78	83	80	77	76						

RC - Ceiling Cavity Reflectance

RW - Wall Reflectance

FPR2-RHAPSODY-SOFT-3000L-DIM10-MVOLT-FL-40K-90-WH

INPUT WATTS: **42.5**

LUMENS: **3037**

CRI: **90**


EFFICACY: **71**

CCT: **4000K**

TEST NO.: **EL061860**

SPACING CRITERIA: **0.46**

Candle Power Distribution (Candelas)



Cone of Light		
4.0	42.4 fc	7.7 ft
8.0	10.6 fc	15.4 ft
12.0	4.71 fc	23.1 ft
16.0	2.65 fc	30.8 ft
20.0	1.7 fc	38.5 ft
24.0	1.18 fc	46.2 ft
Distance to Plane	Initial Footcandle at Nadir	Beam diameter

BEAM DIA. MEASURED AT 50% OF NADIR F.C.

Zonal Lumens Summary

Zone	Lumens	%Lamp	%Fixt
0-20	2230.00	75.60	73.40
0-30	2837.97	96.20	93.40
0-40	2961.32	100.30	97.50
0-60	3018.3	102.30	99.40
0-80	3034.01	102.80	99.90
0-90	3036.98	102.90	100.00

Luminance (Average candela/M²)

Angle in Degrees	Average		
	0°	45°	90°
45	6684	7929	16096
55	3152	3954	4272
65	2689	2716	3508
75	2716	3099	3250
85	2438	5698	6059

Lumens Per Zone

Zone	Lumens
0-10	930.71
10-20	1299.29
20-30	607.97
30-40	123.36
40-50	41.07
50-60	15.91
60-70	9.65
70-80	6.07
80-90	2.97

Candela Tabulation

0	
0	12255.45
5	10924.23
15	4605.42
25	1203.98
35	102.03
45	37.59
55	14.38
65	9.04
75	5.59
85	1.69
90	0.08

Coefficients of Utilization - Zonal Cavity Method

Effective Floor Cavity Reflectance 0.20

ROOM CAVITY RATIO	RC	80%				70%				50%				30%				10%				0%			
		RW	70%	50%	30%	10%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%					
0	122	122	122	122	122	120	120	120	120	114	114	114	109	109	109	105	105	105	103						
1	118	116	114	112	112	116	114	112	110	109	108	107	106	105	104	102	101	101	99						
2	114	110	107	104	104	112	108	105	103	105	103	101	102	100	98	99	98	96	95						
3	110	105	101	98	98	108	103	100	97	101	98	95	99	96	94	96	94	92	91						
4	106	100	96	93	93	105	99	95	92	97	94	91	95	92	90	93	91	89	88						
5	103	96	92	89	89	101	95	91	88	94	90	87	92	89	87	91	88	86	85						
6	99	93	88	85	85	98	92	88	85	91	87	84	89	86	83	88	85	83	82						
7	96	89	85	82	82	95	89	84	81	88	84	81	87	83	81	85	83	80	79						
8	94	86	82	79	79	93	86	82	79	85	81	78	84	80	78	83	80	78	77						
9	91	84	79	76	76	90	83	79	76	82	78	76	81	78	75	81	78	75	74						
10	88	81	77	74	74	87	81	76	74	80	76	73	79	76	73	79	75	73	72						

RC - Ceiling Cavity Reflectance

RW - Wall Reflectance

FPR2-RHAPSODY-SOFT-3000L-DIM10-MVOLT-WFL-40K-90-WH

INPUT WATTS: **42.6**

LUMENS: **3036**

CRI: **85**


EFFICACY: **71**

CCT: **4000K**

TEST NO.: **EL061861**

SPACING CRITERIA: **0.60**

Candle Power Distribution (Candelas)



Cone of Light		
4.0	25.5 fc	11.4 ft
8.0	6.37 fc	22.8 ft
12.0	2.83 fc	34.2 ft
16.0	1.59 fc	45.6 ft
20.0	1.02 fc	57 ft
24.0	0.71 fc	68.4 ft
Distance to Plane	Initial Footcandle at Nadir	Beam diameter

BEAM DIA. MEASURED AT 50% OF NADIR F.C.

Zonal Lumens Summary

Zone	Lumens	%Lamp	%Fixt
0-20	1964.66	65.80	64.70
0-30	2781.59	93.20	91.60
0-40	2950.41	98.80	97.20
0-60	3018.92	101.10	99.50
0-80	3033.05	101.60	99.90
0-90	3035.53	101.70	100.00

Luminance (Average candela/M²)

Angle in Degrees	Average		
	0°	45°	90°
45	6698	7840	24134
55	3222	3887	4165
65	2208	2481	3171
75	1865	2385	2686
85	721		