

G3S3" Miniature Line Voltage GU10 Non-IC Shallow Housing

LAMP WATTAGE: (1) MAXIMUM 120V 50W GU10





Catalog Number: Project Name: Type: Note:

DESCRIPTION

Small aperture line voltage, thermally protected, specification grade recessed housing. For new construction. Non-insulated ceilings or where insulation can be kept 3" from the housing. Accommodates up to 50W GU10 lamps. Furnished with preinstalled adjustable bar hangers. Junction box is provided with four ½" KOs, one ¾" KO and four Romex knockouts with strain relief.

SPECIFICATION

- **A. HOUSING** High temperature painted 22 gauge deep drawn single piece housing. Adjusts vertically in plaster frame to accommodate ½" to 1-3/8" ceiling. Accommodates lamps up to 50W depending on trim used.
- **B. SOCKET** GU10 floating socket allows for lamp to snap into trim and provide secure lamp retention.
- **C. BAR HANGERS** Preinstalled bar hangers allow housing to be positioned and locked at any point within a 24" joist span and can be shortened for 12" joists. They contain a double-headed real nail for secure attachment into the joist. Bar hanger nails are installed on a 20° downward angle for better contact, and the 90° pivoting mounting plate makes installation fast and accurate. Bar hangers can fit onto T-Bar spline with additional slots and holes for special mounting methods if necessary.
- **D. JUNCTION BOX** listed for through-branch cir-cuit wiring and has four % "KOs,one %" KO and four Ro-mex knockouts with true pry-out slots and strain clamps.

120V



GU10 SOCKET

FEATURES

- Thermally Protected Non-IC housing.
- Designed for accent and task lighting applications.
- Wire through junction box.
- · Preinstalled adjustable bar hanger.
- Dependable, favorable design and effortless installation.
- 5-½" height allows use in 2" x 6" joist construction.
- Special screw on the frame locks bar hangers in place which prevents the housing from any movement once in-

OPTIONS

- 1. AIR-SHUT
- Gasket to prevent air flow from heated or air conditioned spaces.
- Meets all national air flow requirements.





G3 - ITEM SELECTOR: (Please check the boxes below for the option desired)

WATTAGE	VOLTAGE	TRIM TYPE				BAFFLE	REFLECTOR	TRIM RING	MR 16 LENS FILTER	
□ 50W	□ 120	☐ B1351 ¹	☐ B1372 ²	□ B1390	☐ B1314	□W	□ CL	□ WH	☐ BP8MR16-BL (Blue)	☐ BP8MR16-FR (Frosted)
		☐ B1353 ¹	☐ B1374 ²	☐ B1391	☐ B1315	□P	□ RG	□ BK	☐ BP8MR16-GR (Green)	☐ BP8MR16-SP (Spread)
		☐ B1354 ¹	☐ B1375 ²	☐ B1320	☐ B1362	□ SN	□W	□ SN	☐ BP8MR16-PI (Pink)	☐ BP8MR16-SF (Soft Focus)
		☐ B1355 ¹	☐ B1376 ²	☐ B1325	☐ B1352	□ CP	☐ MB	□ CP	☐ BP8MR16-PU (Purple)	☐ BP8MR16-HC (Honey Comb)
	OPTION	☐ B1356 ¹	□ B1396	☐ B1324	☐ B1312	□ BZ	□ BZ	☐ CH	☐ BP8MR16-DL (Day Light)	☐ BP8MR16-LI (Linear)
	☐ AT (Air-Shut)	☐ B1357 ¹	□ B1378	☐ B1301	□ B1368		□ CP	□ PB	☐ BP8MR16-YE (Yellow)	☐ BP8MR16-SOL (Solite)
		☐ B1358 ¹	□ B1379	□ B1302	□ B1304		□ SN	□ BZ	☐ BP8MR16-AM (Amber)	☐ BP8MR16-CL (Clear)
		☐ B1359 ¹	□ B1383	□ B1316	□ B1377		□ SHZ	☐ CH¹	☐ BP8MR16-OR (Orange)	☐ BP8MR16-UV (Ultraviolet)
		☐ B1360 ¹	□ B1380	□ B1326				☐ SS ²	☐ BP8MR16-RE (Red)	
		☐ B1370 ²	☐ B1384	☐ B1366						
		☐ B1371 ²	☐ B1395	☐ B1303						

1 = CH - Chrome finished • 2 = SS - Stainless Steel finished

Specifications:

WATT VOLTAGE OPTION TRIM TYPE BAFFLE REFLECTOR TRIM/RING FILTER (1) FILTER (2)

*For custom baffle, reflector, trim ring, glass color and lens options, please consult factory.



Submittal form is available @ www.iuseelite.com Tel: 323-888-1973 • Fax: 323-888-1977

3" Low Voltage Trims

(LAMP WATTAGE: 75W 12V MR16 / 50W 120V GU10)

Catalog Number:	
Project Name:	Туре:
Note:	

B1351CH RUBY I



0.D.: 3-7/8" **FINISH TRIM:** CH (CHROME)

B1353CH RUBY II



0.D.: 3-7/8" **FINISH TRIM:** CH (CHROME)

B1354CH SAPPHIRE I



O.D.: 3-7/8"

FINISH TRIM: CH (CHROME)

B1355CH SAPPHIRE II



0.D.: 3-7/8"

FINISH TRIM: CH (CHROME)

B1356CH EMERALD



0.D.: 3-7/8" FINISH TRIM: CH (CHROME)

B1357CH EMERALD II



O.D.: 3-7/8"

FINISH TRIM: CH (CHROME)

B1358CH TOPAZ I



0.D.: 3-7/8" **FINISH TRIM:** CH (CHROME)

B1359CH TOPAZ II



0.D.: 3-7/8" **FINISH TRIM:** CH (CHROME)

B1360CH ONYX



0.D.: 3-7/8" FINISH TRIM: CH (CHROME)

B1370SS ADJ. STAINLESS STEEL GIMBAL TRIM



0.D.: 3-7/8" **FINISH TRIM:** SS (STAINLESS STEEL)

B1371SS STAINLESS STEEL LENSED TRIM



0.D.: 3-7/8"

FINISH TRIM: SS (STAINLESS STEEL)

STAINLESS STEEL EYEBALL TRIM



0.D.: 3-7/8"

FINISH TRIM: SS (STAINLESS STEEL)

SQUARE BAFFLE W/ SQUARE TRIM RING

B1374SS

ADJ. STAINLESS STEEL SQUARE GIMBAL TRIM



0.D.: 3-7/8"

FINISH TRIM: SS (STAINLESS STEEL)

B1375SS

0.D.:

STAINLESS STEEL SQUARE EYEBALL TRIM



J.: 3-7/8"

FINISH TRIM: SS (STAINLESS STEEL)

B1376SS Adj. Stainless Steel Square Eyeball Trim



0.D.: 3-7/8"

FINISH TRIM: SS (STAINLESS STEEL)



TRIM FINISH: WH, BK, SN, CP, CH, PB, BZ



Submittal form is available @ www.iuseelite.com Tel: 323-888-1973 • Fax: 323-888-1977 Specifications and Dimensions subject to change without notice.

REV: MAXILUME-SPEC-05-26-2011

3" Low Voltage Trims


(LAMP WATTAGE: 75W 12V MR16 / 50W 120V GU10)

Catalog Number:	
Project Name:	Type:
Note:	elite

B1378SN-SN STEPPED BAFFLE (35° TILT)




AVAILABLE COLOR COMBINATIONS:CP-CP, SN-SN, W-WH, P-WH, P-BK, BZ-BZ



B1379CL-WH REFLECTOR (35° TILT)




AVAILABLE COLOR COMBINATIONS: CL-WH, CL-SN, RG-WH, MB-WH, W-WH,MB-BK, RG-PB, SN-SN, CL-CH,CP-CP, CP-WH, SN-WH



B1383WH SLOT APERTURE (35° TILT)



TRIM FINISH: WH, BK, SN, CP, CH, PB, BZ



B1384P-WH FULLY ADJUSTABLE W/ BAFFLE



(35° TILT, 359° ROTATION)



B1395CL-SN



B1380WH FULLY ADJUSTABLE (35° TILT, 359° ROT.)



TRIM FINISH: WH, BK, SN, CP, CH, PB, BZ



B1391P-WH PINHOLE WITH BAFFLE



AVAILABLE COLOR COMBINATIONS: CP-CP, SN-SN, W-WH, P-WH, P-BK, BZ-BZ



B1390WH-PEACH METROPOLITAN ICE LITE



TRIM FINISH: WH, BK, SN, CP, CH, PB





SEMI-FROSTED SHOWER TRIM



REFLECTOR FINISH:






B1301CP-CP STEPPED BAFFLE




AVAILABLE COLOR COMBINATIONS: CP-CP, SN-SN, W-WH, P-WH, P-BK, BZ-BZ



B1302CP-WH REFLECTOR



AVAILABLE COLOR COMBINATIONS: CP-CP, CP-WH, W-WH, RG-WH, SN-SN, SN-WH, MB-WH, CL-WH, MB-BK, RG-PB, CL-CH, CL-SN



B1316CL-WH REFLECTOR (35° TILT)



AVAILABLE COLOR COMBINATIONS: CL-WH, CL-SN, CL-PB



B1326CL-WH The Illuminator II



AVAILABLE COLOR COMBINATIONS: CL-WH, CL-SN, CL-BK, MB-BK




B1366CL-WH THE ILLUMINATOR



B1303WH SLOT APERTURE



B1314P-WH PINHOLE WITH BAFFLE





B1315RG-WH PINHOLE WITH REFLECTOR





Catalog Number:	
Project Name:	Type:
Note:	elitë

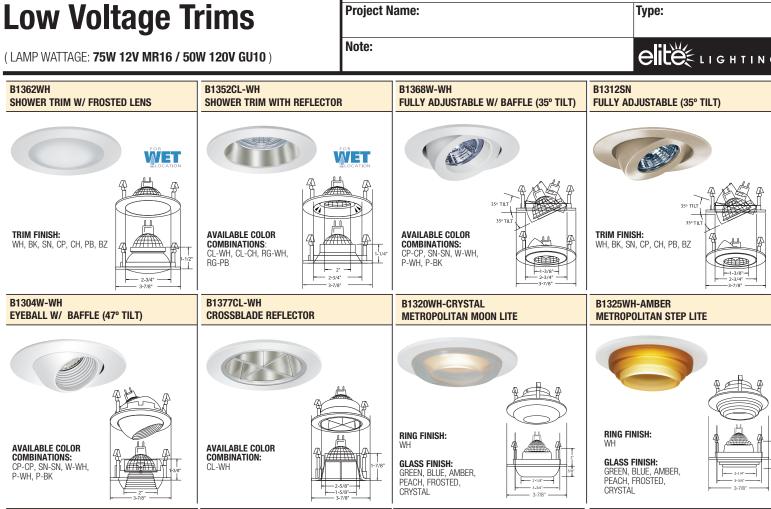





*For custom baffle, reflector, trim ring, glass color and lens options, please consult factory.