


VIBRANT



- A Height = 7-3/4"
- B Trim Aperture = 6"
- C Cut-out = 6-1/2"
- D Trim Outside Dia. = 7-7/8"
- E Width = 10"
- F Length = 12-1/2"

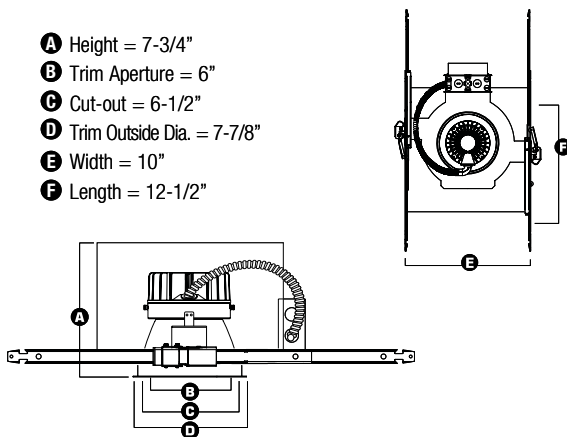

VIBRANT - Vibrant is the perfect solution for any application with precision color control or special purpose lighting application. Vibrant by Maxilume is a high chromatic option in downlighting that enables a vivid appearance of color. Vibrant has CRI and R9 values up to 98 delivering you the purest color LED lighting can offer. Vibrant series is available in four different CCT/CRI/R9 combinations:

CRISP WHITE (CW-42K) has an CRI of 96 and R9 value of 93 and is designed for most retail applications, especially for jewelry and gems.

WARM WHITE (WW-34K) has an CRI of 95 and R9 value of 93 and is designed for Healthcare applications.

TWILIGHT (TL-32K) has an CRI of 96 and R9 value of 98 and is designed for Hospitality, high-end residential, high-rise condominiums.

RED GLOW (RG-37K) has an CRI of 66 and is designed to be used in restaurants and grocery stores, especially to show products in the produce, meat, fish, and poultry departments.

OPTICS - MAXILUME LED Optilux technology combines unmatched performance with visual comfort. Spun 0.05" thick 1-step anodized reflector has been designed to gather the light scattered by the LED chip and shape it into functional beams that minimize brightness and glare, while eliminating lamp image. Reflector offers a 45-55 degree cutoff and smooth frost Solite diffuser distributes light even throughout the workplace in 3 different distribution; Wide (WD), Medium (MD) and Narrow (ND).

THERMAL MANAGEMENT SYSTEM - Using a proprietary coolLED Advanced Thermodynamic Design, Die-cast aluminum housing and heat management system are engineered for extremely long life and service period. Heat sink is attached to top of reflector. The LED light engine is attached to the die-cast heat sink and is easily replaceable and upgradeable. Our die-cast system pulls the heat from the LED chip, allowing continued cool operation for years. Life tests have shown the MAXILUME light engine output will be maintained at 70% of initial at 50,000hrs of operation.

DESCRIPTION - 6" LED dedicated Architectural New Construction Downlight with integral LED heat management casting and driver (installed on junction box). Available in 900 lumens, 1200 lumens, 1500 lumens, & 2000 lumens. ELITE's eco-friendly MAXILUME LED system is Energy Star and California Title 24 compliant and features 70% lumen maintenance at 50,000hrs of life. MAXILUME LED luminaires are ideally suited for use in hospitality, health care, commercial, academic institutions, retail and other architectural applications.

PERFORMANCE - Operating system delivers 900, 1200, 1500, & 2000 lumens. All MAXILUME LED luminaires are rated at 85+ and 90+ CRI, and are binned to within 2 MacAdam ellipse. Elite's highly selective LED chips produce zero ultraviolet and virtually no infrared light. All LED luminaires are rated and tested to LM-79 and LM-80 standards by an independent laboratory.

INSTALLATION TYPE:

NEW CONSTRUCTION: MOUNTING BRACKET AND FRAME - Constructed from 16 gauge steel and is supplied with C-channel that are adjustable up to 28". Mounting bracket maybe adjusted up to 2-3/4" vertically from inside the housing. Mounting frame is made from Die-formed construction for maximum heat dissipation and rust protection.

RETROFIT - Our retrofit is designed to install into an existing downlights mounting frame and convert them into energy efficient LED downlights. Flex is designed to attach into existing junction box.

REMODEL - Die-formed all construction for maximum heat dissipation and rust protection. For fast and easy installation in existing plaster or mechanical ceiling thickness from 1/2" to 1-3/4". Four remodel clips are easily retractable for fixture removal if necessary.

LED DRIVER/JUNCTION BOX - The LED driver is rated for 50 to 60Hz at 120V /277V input, produces less than 20%THD, and has a power factor between 90% and 100% and is thermally protected for additional safety. MAXILUME's LED driver is installed on the junction box cover so it may be serviced from below the ceiling. UL Listed for through-branch circuit wiring, provided with four 1/2" knockouts, one 3/4" knockout and four Romex knockouts with true pryout slots and strain clamps. Designed for straight through conduit runs.

DIMMING INFORMATION FOR MAXILUME HIGH PERFORMANCE / VIBRANT / SMART DIM / SMART WHITE DOWNLIGHT:

DIM10 (0-10V 1% Dimming up to 3000 lumens only and 10% for 4000L and above)

LUTH (Lutron® Hi-Lume A-Series 3-Wire or Eco System 1% Dimming up to 4000 lumens only)

LUT2W (Lutron® Hi-Lume A-Series 2-Wire Forward Phase Control 1% Dimming in 120V only and up to 3000 lumens only)

ELD010-1 (EldoLed 0-10V .1% Dimming driver option)

ELD0DALI-1 (EldoLed DALI .1% Dimming driver options)

ELD0DMX-1 (EldoLed DMX .1% Dimming driver options/ Consult Factory for Details)

DIMTR (Triac & Electronic Low Voltage Dimming in 120V only for High Performance & Vibrant series only)

DIMMING INFORMATION FOR SMART HUE DOWNLIGHT- Smart Hue by Vibrant is compatible with traditional 0-10V wired controls, and digital protocols including Lutron®, Ecosystem® and DMX using the optional Digital Control Adapter. For simple deployment, Digital Control allows up to five scenes to be pre-programmed into the module during production and recalled at the venue using a 0 - 10V. Maxilume Smart Hue controller. Commissioning of the module and re-programming of Scenes is done via the wireless Maxilume Smart Hue Digital Controlling Light Commissioning Tool or smart-phone that connects to the embedded radio.

OUR WORD - The MAXILUME LED lighting system carries a five-year carefree warranty for parts and components. (Labor not included)

LED Driver options:



ROUND & FEATURES

Architectural High Lumen LED Downlight

HH6IC-LED
2000 LUMENS

6"

Round



HH6-6501
Reflector with Diffuse Lens



HH6-6507
Wall Wash Reflector
with Diffuse Lens



HH6-6577
Double Wall Wash
Reflector with Diffuse Lens



HH6-6528 (WH)
Reflector with Aluminum Disk
& Diffuse Lens-White



HH6-6528 (AL)
Reflector w/ Aluminum Disk
& Diffuse Lens- Aluminum



HH6-6528 (BZ)
Reflector with Aluminum
Disk & Diffuse Lens- Bronze



HH6-6509
Deco Glass Reflector with
Diffuse Lens



HH6-6510
Double Ring Glass
Reflector with Diffuse Lens



HH6-6511
Triple Ring Glass Reflector
with Diffuse Lens



HH6-6525
Central Etched Float Glass
with Diffuse Lens



HH6-6521
Standard Ring Glass
Reflector with Diffuse Lens



HH6-6523
Prismo Deco Ring Glass
with Diffuse Lens



HH6-6522
Euro Deco Ring Glass
with Diffuse Lens

VIBRANT	TYPE	LUMENS/DRIVER				VOLTAGE	OPTICS	CCT	CRI	EMERGENCY	TRIM TYPE		REFLECTOR/ RING FINISH	DISC
		900L SERIES	1200L SERIES	1500L SERIES	2000L SERIES						NO DISC	WITH DISC		
HH6IC-LED -VIB	<input type="checkbox"/> 900L-DIM10	<input type="checkbox"/> 1200L-DIM10	<input type="checkbox"/> 1500L-DIM10	<input type="checkbox"/> 2000L-DIM10	<input type="checkbox"/> 120	<input type="checkbox"/> WD (70°-75°)	<input type="checkbox"/> CW	<input type="checkbox"/> 85+	<input type="checkbox"/> EMG-LED Typical lumen output of the fixture is up to 1000L in emergency mode. Contact the factory for details.	<input type="checkbox"/> HH6-6501	<input type="checkbox"/> HH6-6509	<input type="checkbox"/> CL-WH	<input type="checkbox"/> BLUE	
	<input type="checkbox"/> 900L-DIMTR ¹	<input type="checkbox"/> 1200L-DIMTR ¹	<input type="checkbox"/> 1500L-DIMTR ¹	<input type="checkbox"/> 2000L-DIMTR ¹	<input type="checkbox"/> 277	<input type="checkbox"/> MD (65°-60°)	<input type="checkbox"/> VW	<input type="checkbox"/> 90+		<input type="checkbox"/> HH6-6507	<input type="checkbox"/> HH6-6510	<input type="checkbox"/> CL-SCH	<input type="checkbox"/> RED	
	<input type="checkbox"/> 900L-LUTTH ²	<input type="checkbox"/> 1200L-LUTTH ²	<input type="checkbox"/> 1500L-LUTTH ²	<input type="checkbox"/> 2000L-LUTTH ²	<input type="checkbox"/> 347	<input type="checkbox"/> ND (35°-40°)	<input type="checkbox"/> TL	<input type="checkbox"/> HH6-6521		<input type="checkbox"/> HH6-6511	<input type="checkbox"/> SHZ-SHZ	<input type="checkbox"/> GREEN		
	<input type="checkbox"/> 900L-LUT2W ¹	<input type="checkbox"/> 1200L-LUT2W ¹	<input type="checkbox"/> 1500L-LUT2W ¹	<input type="checkbox"/> 2000L-LUT2W ¹	(DIM10 only)		<input type="checkbox"/> RG	<input type="checkbox"/> HH6-6522		<input type="checkbox"/> HH6-6528	<input type="checkbox"/> SHZ-WH	<input type="checkbox"/> FROST		
	<input type="checkbox"/> 900L-ELD010-1 ²	<input type="checkbox"/> 1200L-ELD010-1 ²	<input type="checkbox"/> 1500L-ELD010-1 ²	<input type="checkbox"/> 2000L-ELD010-1 ²				<input type="checkbox"/> HH6-6523			<input type="checkbox"/> W-WH	<input type="checkbox"/> AL		
	<input type="checkbox"/> 900L-ELD0DALI-1 ²	<input type="checkbox"/> 1200L-ELD0DALI-1 ²	<input type="checkbox"/> 1500L-ELD0DALI-1 ²	<input type="checkbox"/> 2000L-ELD0DALI-1 ²				<input type="checkbox"/> HH6-6525			<input type="checkbox"/> MB-WH	<input type="checkbox"/> BZ		
	<input type="checkbox"/> 900L-ELD0DMX-1 ²	<input type="checkbox"/> 1200L-ELD0DMX-1 ²	<input type="checkbox"/> 1500L-ELD0DMX-1 ²	<input type="checkbox"/> 2000L-ELD0DMX-1 ²				<input type="checkbox"/> HH6-6577			<input type="checkbox"/> WT-WH	<input type="checkbox"/> WH		

¹ LUT2W and DIMTR are available in 120V only

² LUTH, ELD010-1, ELD0DALI -1, and ELD0DMX-1 are available in 120V and 277V

50K series are available with 85+ CRI only

RG (Red Glow) Vibrant series are available up to 1500L only

REFLECTOR		RING		DISC	
CL -Clear	WT -Wheat	WH Self-Flange White	BLUE	WH White	
SHZ -Satin Haze	MB -Black	SCH Self-Flange Chrome	RED	BZ Bronze	
(Low Iridescent)	W -White	SHZ Satin Haze	GREEN	AL Aluminum	
			FROST		

*For custom baffle, reflector, trim ring, glass color and lens options, please consult factory.