


MOS-6614
Reflector with
Frosted Glass Lens



MOS-6607
Wall Wash Reflector
with Diffuse Lens



MOS-6601
Open Reflector



EX-TL-6614
Trimless Reflector with
Frosted Glass Lens



EX-TL-6607
Trimless Wall Wash Reflector
with Diffuse Lens



EX-TL-6601
Trimless Open
Reflector

REFLECTOR/
FLANGE COLORS



CL-WH



CL-SCH



SHZ-WH



SHZ-SHZ




WT-WH



W-WH



MB-BK

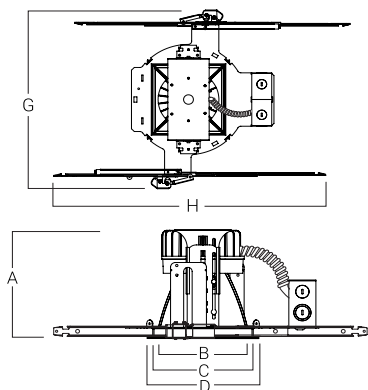

A: Height = 7-3/8"
B: Trim Aperture = 6"
C: Cut-Out = 6-1/2"
D: Trim Outside Dia = 7-1/8"
G: Flange = 16"
H= Max: 32" Min: 21"

NOMINAL	ELITE	LED ENGINE
4000	50 W	-
3000	36 W	30 W
2500	28 W	-
2000	23 W	20 W
1500	19 W	-
1200	16 W	-
1100	-	11 W
900	12 W	-


Based on 4000K, 90CRI with semi-specular chrome reflector.
Actual wattage may vary +/-5%

DYNAMIC PLATFORM

SMART WHITE - Tunable White with Smart White technology allows the tuning of luminaires to mimic the natural color patterns throughout the day, enhancing interior office spaces, hospitality, and architectural elements. Tuning of intensity and color in classrooms enables a diversification in student activities, while the use of tunable white technology in healthcare stimulates circadian rhythm, accelerating the healing process. Complementing colors and textures in retail merchandising also has an impact on sales, utilizing the technology to adjust colors throughout the season. A CRI of 90+ is standard, and available on all three platforms. Elite Platform (50K-27K), LED Engin Platform (65K-18K)

LUMENS	Elite Platform: 900, 1200, 1500, 2000, 2500, 3000, 4000 Engin Platform: 1100 & 2000
TUNABLE WHITE PLATFORM	High Performance: TWH-50K-27K (50K to 27K) : TWH-65K-27K (65K to 27K)
CRI	90+ Standard
COLOR QUALITY	2 Step MacAdam Ellipse
DISTRIBUTIONS	MD (Medium Distribution) - 45° visual cutoff
TRIM OPTIONS	Downlight, Wall Wash, Wet Location
REFLECTOR COLORS	CL (Semi-Specular Chrome), SHZ (Low Iridescent Satin Haze), WT (Wheat), WH (White), MB (Black)
FLANGE COLORS	Self-flanged WH (White), SCH (Semi-Specular Chrome), SHZ (Low Iridescent Satin Haze), MB (Black) and TL (Trimless)
DIMMING	1% Dimming Standard, 0-10V (DIM10), DMX-512 DMX-RDM, BLE, LUTH, DALI, DLM
EMERGENCY	10W - Up to 1000L Output 20W - Up to 2000L Output EMG-LED-G2-10W-SDT - Self Diagnostic (Consult Factory)
LIFETIME	L70 at 102,000 Hours
PHOTOMETRIC TESTS	In Accordance with IES LM79-08, LM80 and TM-30, TM-21

MD: Medium
Candlepower Distribution Curve



Reference IES files for additional distribution curve information.





FEATURES

A highly sustainable and ultra-efficient architectural LED downlight that provides even, glare-free illumination. Available in a range of finishes and lumen packages, it is ideally suited for use in corporate office space, hospitality, healthcare, commercial, academic, churches and retail.

OPTICS AND REFLECTOR

The reflector has a 45° cutoff, and is shipped standard with a Solite lens in a smooth frosted finish. It is spun from 0.05" thick aluminum, has a 1-step anodized finish, and is available in different colors or custom RAL finishes. Reflector trim options include self-flanged and white painted flange.

THERMAL MANAGEMENT SYSTEM

Passive cooling Diecast Aluminum Heat Sink, LED light engine and driver are replaceable, upgradeable, and can be accessed from below the ceiling. The consistency in the quality of light is delivered with precision performance by the use of a unique locking mechanism that aligns the reflector with the light engine.

MOUNTING FRAME & BRACKET

The downlight mounting frame is a fabricated assembly constructed of 16-gauge steel, with C-channel mounting brackets, included. The versatility of the mounting bracket allows for an adjustability of up to 28" horizontally, and 2-3/4" vertically, locking into place. With the added die-formed construction of the mounting frame, it provides maximum heat dissipation and rust protection.

DRIVER ELECTRICAL INFORMATION

The LED driver is rated for 50 to 60Hz at 120V/277V input, produces less than 20%THD, has a power factor between 90% and 100%, and is thermally protected for additional safety. Junction box and Driver can be accessed from below the ceiling and above the ceiling. Junction Box is Listed for through branch circuit wiring.

DIMMING & DRIVER INFORMATION

SMART WHITE High Performance platform with a tuning range of 5000K to 2700K (TWH-50K-27K).

Control via DIM10 (0-10V), ELITE-CONNECT 0-10V, LUTRON, DMX512-RDM, DALI

Control via DIM10, ELITE-CONNECT 0 10V, DMX512, DMX-RDM, BLE, DALI Junction box and Driver can be accessed from below the ceiling and above the ceiling. Junction Box is Listed for through branch circuit wiring.

WARRANTY

Five-year warranty for parts and components. (Labor not included)

LISTINGS

c-UL-us - Listed for Wet Location except if used with MOS-6601 Trim.

c-UL-us - Listed for Feed Through Wiring.

All LED luminaires are rated and tested to LM-79 and LM-80 standards by an independent laboratory.

U.S Patent No. - D685,118S



Example: **HH6SQ-LED-TWH-50K-27K-900L-DIM10-120-MD-90-MOS-6601-CL-WH**

SERIES	LUMENS	DRIVER	VOLTAGE	EMERGENCY	TRIM TYPE	REFLECTOR/TRIM- FINISH	WALL MOUNT CONTROLLER
HH6SQ-LED-TWH-50K-27K HH6SQ-LED-TWH-65K-27K	<input type="checkbox"/> 900L <input type="checkbox"/> 1200L <input type="checkbox"/> 1500L <input type="checkbox"/> 2000L <input type="checkbox"/> 2500L	<input type="checkbox"/> DIM10* <input type="checkbox"/> DMX-512 <input type="checkbox"/> DMX-RDM <input type="checkbox"/> DALI <input type="checkbox"/> LUTH ²	<input type="checkbox"/> 120 <input type="checkbox"/> 277 <input type="checkbox"/> MVOLT	<input type="checkbox"/> EMG-LED-10W <input type="checkbox"/> EMG-LED-20W <input type="checkbox"/> EMG-LED-G2-10W-SDT* Typical lumen output of the luminaire is up to 1000L with EMG-LED-10W option & 2000L with EMG-LED-20W option in emergency mode. Contact the factory for details. Remote mounted installation * Consult Factory for Self Diagnostic	<input type="checkbox"/> MOS-6601 <input type="checkbox"/> MOS-6607 <input type="checkbox"/> MOS-6614 <input type="checkbox"/> MOS-6615	<input type="checkbox"/> CL-WH <input type="checkbox"/> CL-SCH <input type="checkbox"/> SHZ-WH <input type="checkbox"/> SHZ-SHZ <input type="checkbox"/> WT-WH <input type="checkbox"/> WH-WH <input type="checkbox"/> MB-WH <input type="checkbox"/> CL-MB TRIMLESS FINISH <input type="checkbox"/> SHZ <input type="checkbox"/> CL	<input type="checkbox"/> EC-WC-TWH-HW-MVOLT ¹
			OPTICS <input type="checkbox"/> MD	CRI <input type="checkbox"/> 90+	TRIMLESS <input type="checkbox"/> EX-TL-6607 <input type="checkbox"/> EX-TL-6614 <input type="checkbox"/> EX-TL-6615		

* For 0-10V driver you must dedicate two control inputs, one for the Dimming Control and another for CCT Tuning.

** For Details Consult Factory



¹ Compatible with Elite 0-10V Platform and LED Engin 0-10V Platform ² (Lutron T Series 2 Channel Tunable White)





CONTROL OPTIONS

With the integration of controls, Elite Lighting now offers its products with controls-ready performance that increases energy efficiency, smarter space planning, and the enhancement of safety and productivity in the workplace. By utilizing these controls, Elite Lighting luminaires enable your customer's facility to run smarter, with the use of an easily controlled system through any platform.

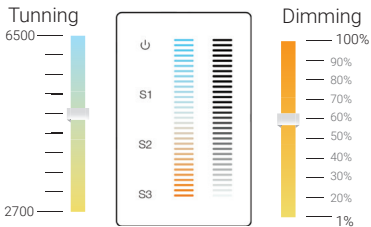CONTROL PROTOCOLS	SMART WHITE	LEDENGIN
<p>❑ ELITE-CONNECT (EC-WC-TWH-HW-MVOLT) - Hard-wired, 0-10V, 120/277V wall mounted controller for CCT Tuning and Intensity Dimming through Simple Touch screen pad, provided by Elite Lighting. Programmable for up to 3-scenes, with a dimming range down to 1%. Applicable for office spaces, hospitality, educational, healthcare, and retail merchandising.</p> 	✓	✓
<p>❑ DIM10 (0-10V 1% Dimming Standard) In order to Control the Color Tuning and dimming option with 0-10V driver you must dedicate two control inputs, one for the Dimming Control and another for CCT Tuning. Can be dimmed and tuned with 2 wall box dimmers and compatible with most control systems and/or daylight harvesting systems.</p> <p>❑ DIM10-LUTRON Compatible with Lutron GRAFIK Eye QS or GRAFIK Eye 3000 by using two GRX-TVI Lutron 0-10V Dimming interfaces; one to tune and another to control dimming. Also compatible with Lutron VIVE system by using two FCJS-010 PowPak or FCJS-ECO EcoSystem PowPak modules per fixture; one to tune and one to control dimming.</p> 	✓	✓
<p>❑ DMX (Available on Elite, LED Engin) - Compatible with Digital Multiplex Controller, Available with two options: DMX-512: Standard DMX Controller and DMX-RDM: DMX Controller with Remote Device Management.</p>	✓	✓
<p>❑ LUTECO Compatible with Lutron EcoSystem. Compatible with Lutron GRAFIK Eye EcoSystem, Lutron Energi Saver node EcoSystem, or Lutron Quantum systems.</p>	✓	N/A
<p>❑ DALI Compatible with Digital Addressable Lighting Interface, available with two options: DT6 and DT8.</p>	✓	✓
<p>❑ DLM The combination of the Blanco 3 with DLM from Legrand Wattstopper enables simple commissioning, synonymous with DLM and the enhanced features and flexibility.</p>	N/A	N/A