

EMERGENCY BALLAST

EMG SERIES

ORDER SEPARATELY FOR EASY FIELD INSTALLATION



Bodine B94C-2



IOTA I42EM-J



IOTA I42EM-R-J



When ordering trims for INTG 750 or INTG 1300 emergency options, place "INTG" at the end of the trim catalog number. E.g. 6501-WH-INTG

LAMP COMPATIBILITY CHART

MODEL	EMGT5-500	EMGT5-700	EMGT5-800	EMGT5-1300	EMG500	EMG650C-2	EMG700	EMG650C-4	EMG1400	EMG3000	EMG32
LUMENS	500	700	800	1300	500	650	700	650	1400	3000	500
LINEAR LAMPS											
NUMBER OF LAMPS SUPPORTED											
2'-4' Rapid, Instant, or Energy Savings, T8-T12, HO, VHO	1	1	1	1	1		1 or 2	1	1 or 2	1 or 2	1
2'-8' Rapid, Instant, or Energy Savings, Circline T8-T12, HO, VHO							1		1	1	
8W-14W - T5	1	1									
8W-28W - T5			1	1	1		1		1 or 2	1 or 2	1
54W - T5HO			1	1					1 or 2	1 or 2	
CFL LAMPS											
NUMBER OF LAMPS SUPPORTED											
13 - 26W - Twin/Quad/TT - 4-pin (G24q/GX24q base)							1 or 2	1 or 2	1 or 2	1 or 2	
13 - 42W - Twin/Quad/TT - 4-pin (G24q/GX24q base)							1	1	1	1 or 2	
10 - 26W - Quad/TT - 2-pin (G24d/GX24d base)						1					
17W - 40W 4-pin Long Compact Fluorescent			1	1	1		1 or 2		1 or 2	1 or 2	1
40W - 55W 4-pin Compact			1	1			1		1	1	
SPECIALTY LAMPS											
NUMBER OF LAMPS SUPPORTED											
20W - 40W T9/T10/T12 Circline Lamps					1		1 or 2		1 or 2	1 or 2	1
16W - 38W 2D- 4-pin (GR10q base)										1 or 2	1
55W 2D- 4-pin (GR10q base)										1	

BALLAST-LAMP COMPATIBILITY CHART

Ballast Part #	Max. Lumen Output	LINEAR FLUORESCENT LAMPS						COMPACT FLUORESCENT LAMPS			
		T5 (W)		T5HO (W)		T8 (W) / T8 (U-Bend) / T9 (Circline)		4-Pin CFL (W)		4-Pin Long CFL (W)	
		1 Lamp	2 Lamp	1 Lamp	2 Lamp	1 Lamp	2 Lamp	1 Lamp	2 Lamp	1 Lamp	2 Lamp
BAL-EMG-T8-500	500	-	-	-	-	17-40	-	13-26	-	18-36	-
BAL-EMG-T8-1400	1400	-	-	-	-	17-110	17-40	13-42	13-39	18-55	18-36
BAL-EMG-T8-3000	3000	-	-	-	-	17-215	17-40	-	13-42	18-55	18-36
BAL-EMG-T5-700	700	8, 14	-	-	-	17-40	-	13-39	-	18-36	-
BAL-EMG-T5-1400	1400	-	8-28	39, 54	-	17-125	17-40	13-42	13-39	18-50	18-36
BAL-EMG-T5-3000	3000	-	8-28	-	39, 54	17-125	17-40	-	13-42	18-55	18-50
BAL-EMG-T5HO-1400	1400	-	8-28	39, 54	-	-	17-40	13-42	13-39	-	18-40
BAL-EMG-T5HO-3000	3000	-	8-28	-	39, 54	17-125	17-40	-	13-42	18-55	18-50

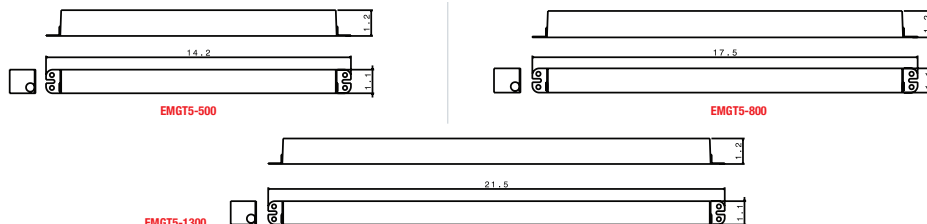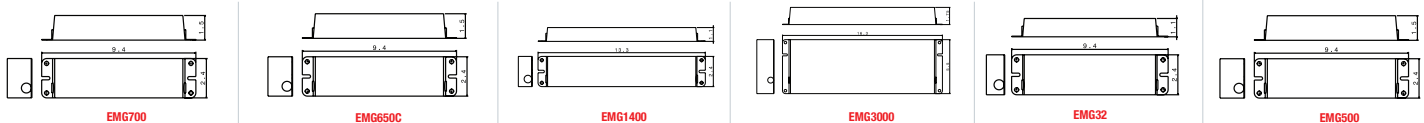

Due to the changes of constant improvement in lighting technology, all details are subject to change without notice. Consult factory for up to date information.

MAXILUME

Exit Sign and Emergency Lighting