



FEATURES

The LB1000-LR Lumi-PRO Strip Light is an extremely easy-to-operate, long-run lighting solution designed for indoor applications. With a versatile range of color temperatures-3000K, 4000K, and 5000K-it provides flexibility to create the desired ambiance and lighting effects in a variety of indoor

Designed for use with our Lumi-Pro Extrusions, the LB1000-LR LED Strip Light seamlessly integrates into diverse indoor settings. It is mountable on different surfaces, including walls, ceilings, or furniture, making it suitable for

Max run up to 52ft Indoor/Damp Location (IP22) 90+ CRI Field cuttable every 1.97" Warranty: 5 years limited warranty

Color Temp.	3.1 W/ft.	
3000K	270m/ft	
4000K	290lm/ft	
5000K	295lm/ft	

WIRING ACCESSORIES (Tape light comes with 4ft standard length soldered lead attached on one side)

TT10-2 (1 Piece Included)



Tape-to-Tape Connector 0.95L x 0.57W x 0.27H

TW10-2 (1 Piece Included)



Power Connector 6" Length

JP10-2 (1 Piece Included)



Tape-to-Tape Jumper 6" Length

(1 Piece Included)



12" Length

(1 Piece Included)



Female Connector 12" Length

(Standard SL Attached)



Soldered Lead 4ft standard length. (custom length sizes available)

JPSL-2 (Optional)





Soldered Jumper 6" L jumper (custom length sizes available)

TECHNICAL DETAILS


Power	3.1W/FT	
Voltage	24V	
CRI	90+	
LPW	92L/W	
LED Qty	37/FT	
Max Run(ft)	52FT	
Cutting Length	Every 1.97"	
Dimensions	W0.39" X H0.1"	
Working Temp.	-4F / +122F	

LB1000-LR-3.1W-52F-30K





DIMENSIONS

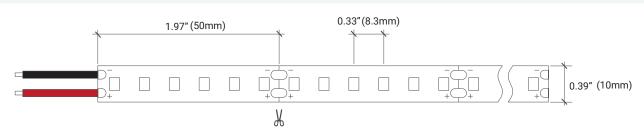





It Can be ordered in 3 different ways.

1. Everything will be shipped separately

• Tape light, cover, extrusion and accessories will be cut and shipped to your desired length.



Cover, mounting clips, end caps, and channel if ordered.

Accessories if ordered.



2. Pre-assembled and shipped separately as two units

- Tape light, cover, extrusion and accessories will be cut and shipped to your desired length.
- Wiring accessories will be attached to the tape light.
- · Cover, end caps and clips will be assembled to the channel.



Wiring accessories attached to the tape light.



Channel will be cut and assembled to your desired length.


3. Fully assembled and shipped as a single unit

- Tape light, cover, extrusion and accessories will be cut and shipped to your desired length.
- Wiring accessories will be attached to the tape light.
- Tape light will be installed into the channel and ready to use.



Refer to the next page for **COMPATIBLE** channels.

ORDERING SELECTION

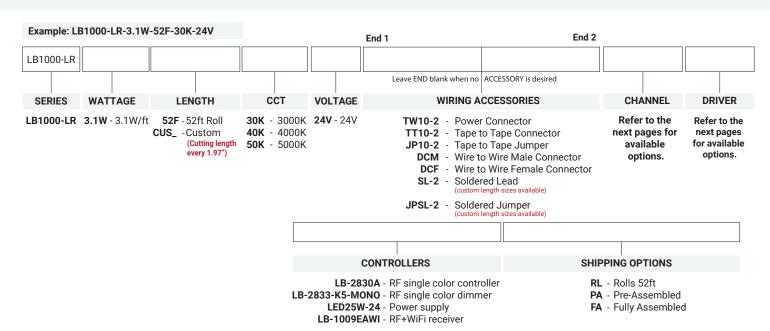




COMPATIBLE CHANNELS















LP-SHC-CM-075/ Surface

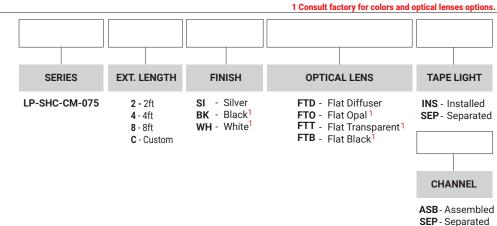

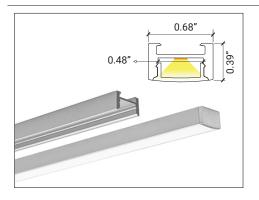



LP-MDC-CM-075/ Surface Accessories Available, please refer to the channel spec sheet.

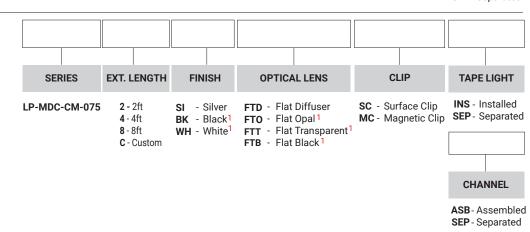

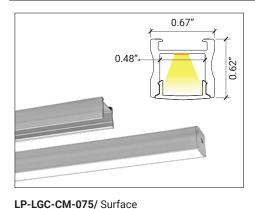

Accessories Available, please refer to the channel spec sheet.

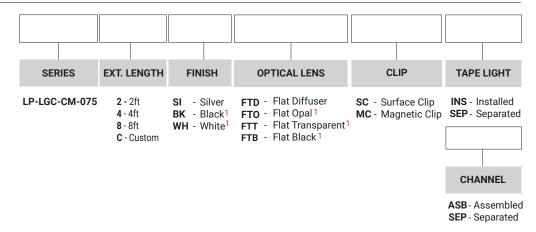







SEP - Separated






















LP-SHC-CM-1/ Surface

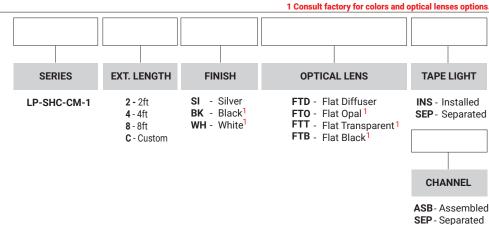

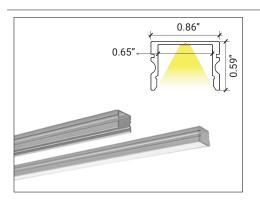



LP-MDC-CM-1/ Surface

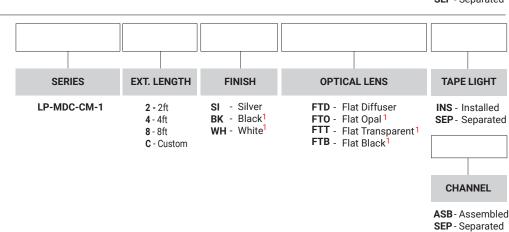

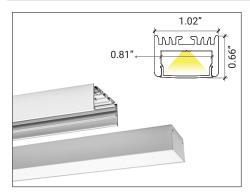

LP-LGC-CM-1/ Surface

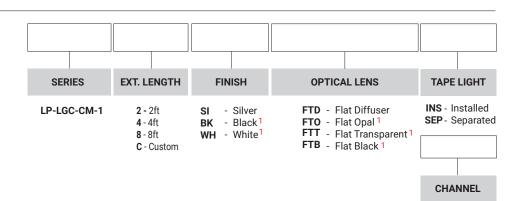

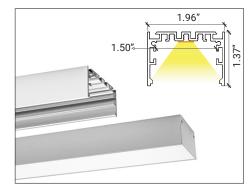

LP-LGC-CM-2/ Surface



CHANNEL

ASB-Assembled SEP - Separated

ASB- Assembled SEP - Separated




COMPATIBLE CHANNELS















LP-SHC-RFT-075/ Recessed

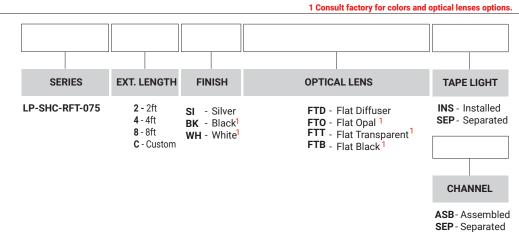

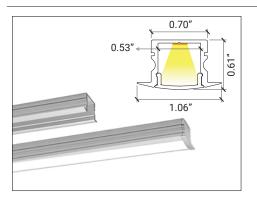



LP-MDC-RFT-075/ Recessed

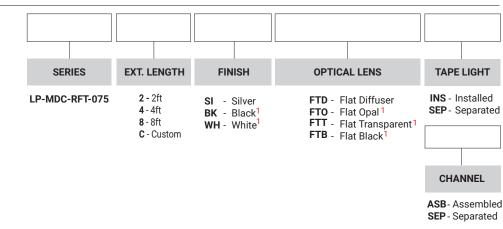

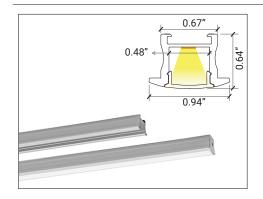


LP-LGC-RFT-075/ Recessed Accessories Available, please refer to the channel spec sheet.

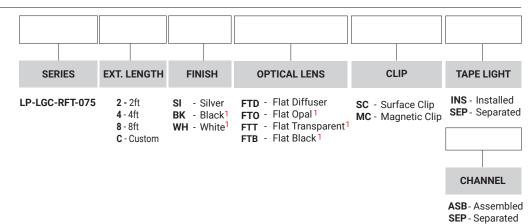





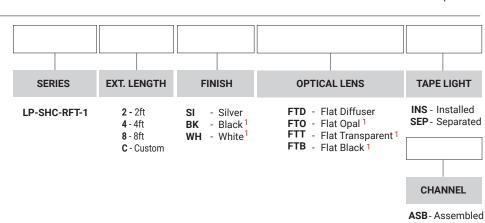

















LP-LGC-RFT-1/ Recessed

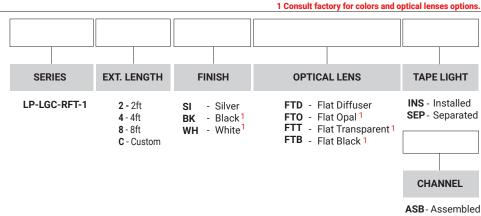


SEP - Separated

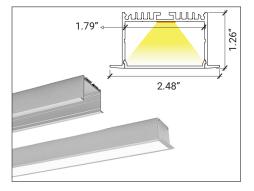



LP-SHC-RFT-2/ Recessed

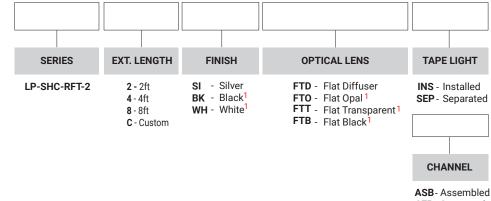





LP-MDC-RFT-2/ Recessed Accessories Available, please refer to the channel spec sheet.

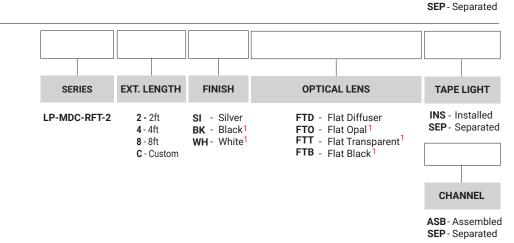





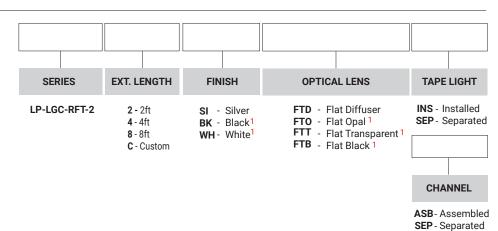














SEP - Separated





LP-LGC-RTL-050/ Trimless

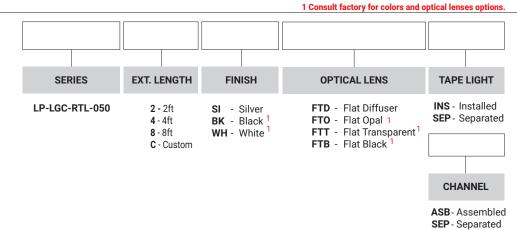

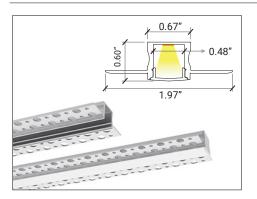

LP-LGC-RTL-075/ Trimless

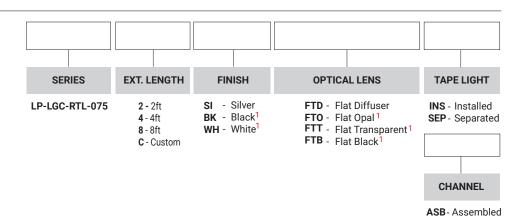


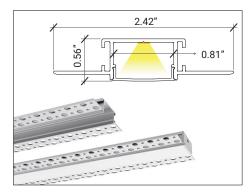


LP-MDC-RTL-1/ Trimless

LP-SHC-RTL-2/ Trimless



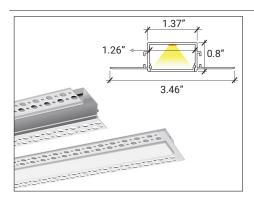

Accessories Available, please refer to the channel spec sheet.

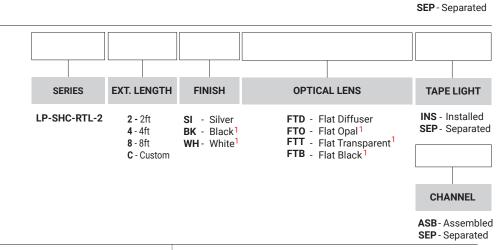















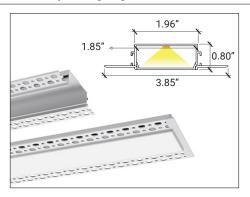



LP-MDC-RTL-2/ Trimless Accessories Available, please refer to the channel spec sheet.







LP-LGC-RTL-2/ Trimless
Accessories Available, please refer to the channel spec sheet.

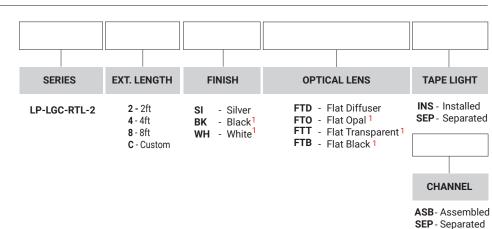




LP-LGC-WM-RTL-050/Wall Mount/Trimless

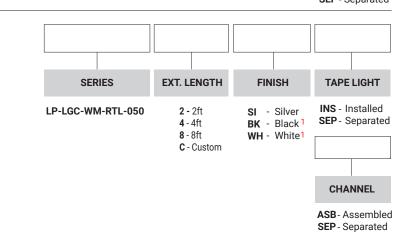

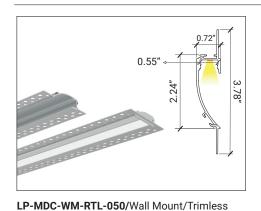

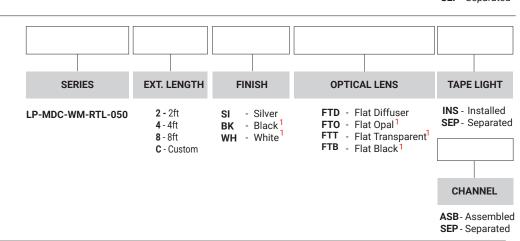


















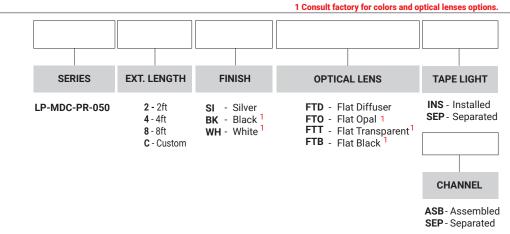





LP-MDC-WM-CM-050/ Wall Mount

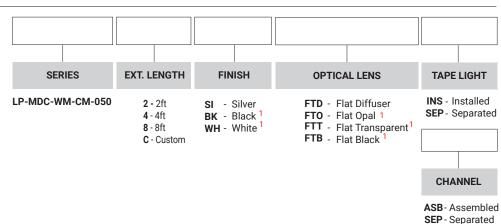

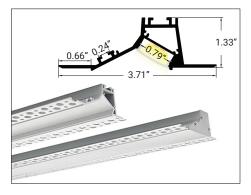


LP-MDC-WW-RTL-075/ Wall Washer

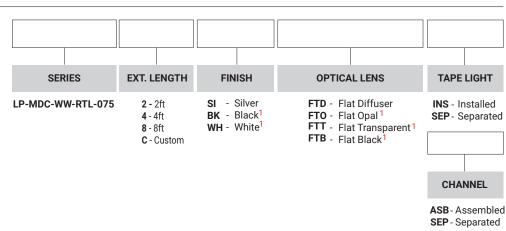

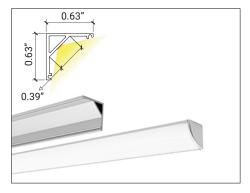

www.iuseelite.com

LP-LGC-S90-050/ Surface Corner

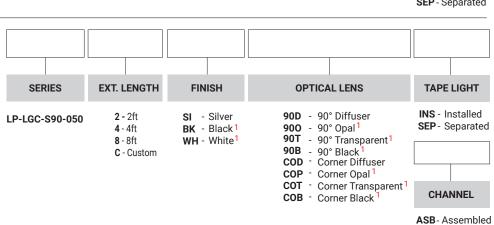


SEP - Separated














LP-MDC-TLC-050/ Trimless Corner

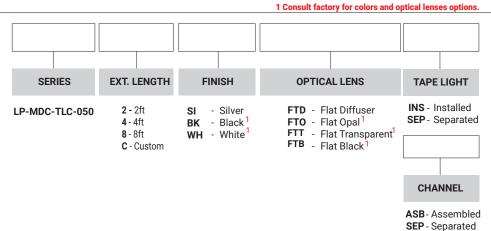

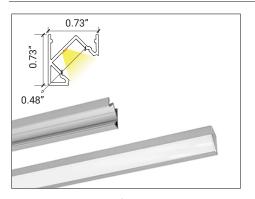


LP-MDC-S90-075/ Surface Corner

SERIES	EXT. LENGTH	FINISH	OPTICAL LENS	TAPE LIGHT
LP-MDC-S90-075	2 - 2ft 4 - 4ft 8 - 8ft C - Custom	SI - Silver BK - Black 1 WH - White 1	FTD - Flat Diffuser FTO - Flat Opal ¹ FTT - Flat Transparent ¹ FTB - Flat Black ¹	INS - Installed SEP - Separated
				ASB - Assemble SEP - Separated

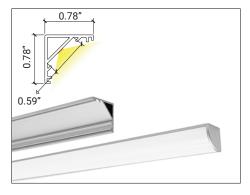


LP-LGC-S90-075/ Surface Corner

LP-LGC-S90-1/ Surface Corner

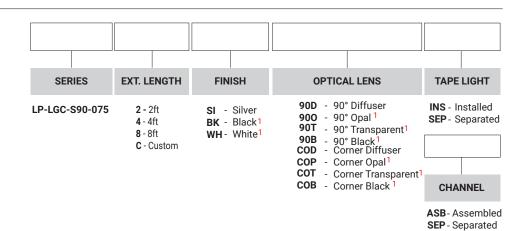

FINISH

SI - Silver BK - Black



90° Transparent 1 90T -8 - 8ft WH - White 90B -90° Black 1 C - Custom COD - Corner Diffuser COP Corner Opal 1 COT - Corner Transparent 1 COB - Corner Black 1

EXT. LENGTH

2 - 2ft

4 - 4ft

SERIES

LP-LGC-S90-1

OPTICAL LENS

90D -

900 -

90° Diffuser

90° Opal 1

TAPE LIGHT

INS - Installed

SEP - Separated

CHANNEL

ASB- Assembled SEP - Separated












1 Consult factory for colors and optical lenses options

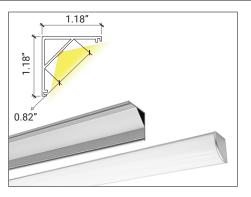


LP-LGC-S90-2/ Surface Corner



ASB - Assembled SEP - Separated


> Installed Separated

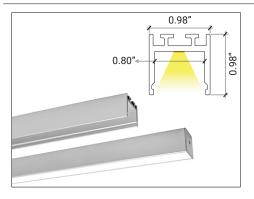


LP-MDC-SPD-1/ Suspended


SERIES	EXT. LENGTH	FINISH	OPTICAL LENS	CLIP	TAPE LIGHT
LP-MDC-SPD-1	2 - 2ft 4 - 4ft 8 - 8ft C - Custom	SI - Silver BK - Black ¹ WH - White ¹	FTD - Flat Diffuser FTO - Flat Opal ¹ FTT - Flat Transparent ¹ FTB - Flat Black ¹	PC - Pendant Cable SC - Surface Clip	INS - Installed SEP - Separated
					CHANNEL


ASB- Assembled SEP - Separated

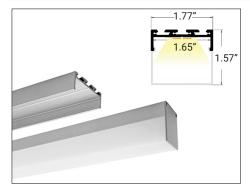

LP-SHC-SPD-2/ Suspended

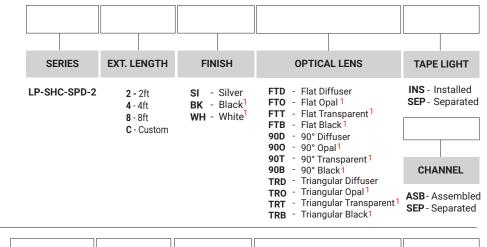

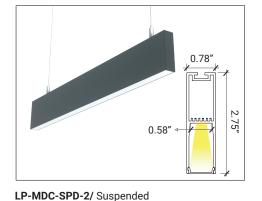

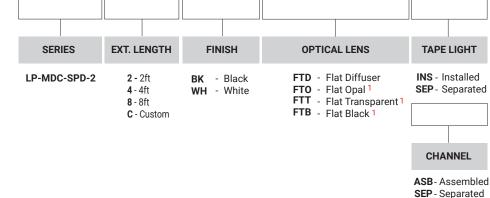














ASB- Assembled

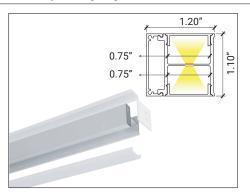


LP-MDC-WM-DI-1/ Surface / Up & Down Light

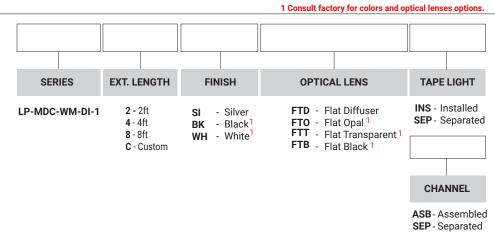

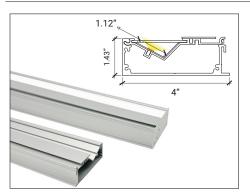


LP-MDC-WW-RTL-2/ Cove

SERIES	EXT. LENGTH	FINISH	OPTICAL LENS	TAPE LIGHT
LP-MDC-WW-RTL-2	2 - 2ft 4 - 4ft 8 - 8ft C - Custom	SI - Silver BK - Black ¹ WH - White ¹	FTD - Flat Diffuser FTO - Flat Opal ¹ FTT - Flat Transparent ¹	INS - Installed SEP - Separated
				CHANNEL



LP-LGC-FL-025/ Recessed Floor

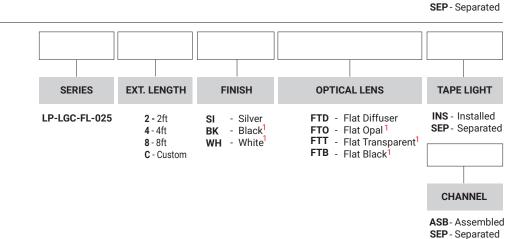



Static White / Wall Controller RF

Power Supply



ED-96W-24V-TRIAC-DIM10



ED-192W-24V-TRIAC-DIM10



ED-288W-24V-TRIAC-DIM10

LB-1009EAWi

LED Receiver

Input Voltage	12-36 VDC
Output Current	4x8A
Output Power	4X(96-288)W
Dimensions	6.6"X2.3"X1.1"



LB-1009EAWi

WALL CONTROLLER

LB-2830A

Output Signal RF Signal **Power Supply** 12-24 DC



LED25W-24 (Power Supply) (Optional for wall controller)



Control 4 zones.

LED Tape Light

Wall Control



LB1000-LR



Static White / Wall Dimmer Controller RF





ED-96W-24V-TRIAC-DIM10



ED-192W-24V-TRIAC-DIM10



ED-288W-24V-TRIAC-DIM10

LB-1009EAWi

LED Receiver

Input Voltage	12-36 VDC
Output Current	4x8A
Output Power	4X(96-288)W
Dimensions	6.6"X2.3"X1.1"



LB-1009EAWi

WALL DIMMER CONTROLLER

LB-2833N-K5-M0N0

Output Signal RF Signal

Power Supply 3V (CR2032 battery)



Control 1 zone.



Wall Control



LB1000-LR










Triac-Phase Cut/Triac ELV/0-10V/1-10V PWM/Potentiometer (5 in 1) Dimmable


PN: ED-30W-24V-TRIAC/DIM10


By Elite Lighting

Model	Input Voltage	Output Voltage	Wattage	Max. Output current	Frequency	Location	Certificate
ED-30W-24V-TRIAC/DIM10	100-277VAC	24V	30W	1.25A	50/60Hz	Dry, Damp, and Wet locations	UL, cUL, FCC, Class 2, RoHS

Dimensions










PN: ED-60W-24V-TRIAC/DIM10


ED-30W-24V-TRIAC/DIM10

Model	Input Voltage	Output Voltage	Wattage	Max. Output current	Frequency	Location	Certificate
ED-60W-24V-TRIAC/DIM10	100-277VAC	24V	60W	2.5A	50/60Hz	Dry, Damp, and Wet locations	UL, cUL, FCC, Class 2, RoHS













PN: ED-96W-24V-TRIAC/DIM10

Model	Input Voltage	Output Voltage	Wattage	Max. Output current	Frequency	Location	Certificate
ED-96W-24V-TRIAC/DIM10	100-277VAC	24V	96W	4A	50/60Hz	Dry, Damp, and Wet locations	UL, cUL, FCC, Class 2, RoHS


















Triac-Phase Cut/Triac ELV/0-10V/1-10V PWM/Potentiometer (5 in 1) Dimmable


PN: ED-192W-24V-TRIAC/DIM10


By Elite Lighting

Model	Input Voltage	Output Voltage	Wattage	Max. Output current	Frequency	Location	Certificate
ED-192W-24V-TRIAC/DIM10	100-277VAC	24V	192W	Multi 2X96W	50/60Hz	Dry, Damp, and Wet locations	UL, cUL, FCC, Class 2, RoHS

Dimensions ED-192W-24V-TRIAC/DIM10











PN: ED-288W-24V-TRIAC/DIM10

Model	Input Voltage	Output Voltage	Wattage	Max. Output current	Frequency	Location	Certificate
ED-288W-24V-TRIAC/DIM10	100-277VAC	24V	288W	Multi 3X96W	50/60Hz	Dry, Damp, and Wet locations	UL, cUL, FCC, Class 2, RoHS













PN: ED-384W-24V-TRIAC/DIM10

Model	Input Voltage	Output Voltage	Wattage	Max. Output current	Frequency	Location	Certificate
ED-384W-24V-TRIAC/DIM10	110-277VAC	24V	384W	Multi 4X96W	50/60Hz	Dry, Damp, and Wet locations	UL, cUL, Class 2, RoHS















Dimming Operation and Connecting Diagram

• **Using two ways of dimming at the same time**, you must be assured that LED lighting is up to the max. Brightness then you could operate with the other dimming;



Using one dimming ---TRIAC/Phase cut dimming

- 1. The Pulse-Width Modulation (PWM) of output voltage can be adjusted through input terminal of the AC phase line(L) by connection a phase /Triac dimmer or lighting system.
- 2. Working with forward phase, MLV and Reverse phase, ELV, TRIAC dimmers or light system.
- 3. Min. loading is about 10%
- 4. Please try to use dimmers with power at least 1.5 times as the output power of the driver.



Using one dimming ---0-10/1-10V/10V PWM/ Potentiometer dimming














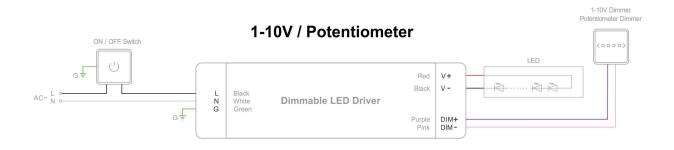











Constant Voltage TRIAC Dimmable Driver

PN: HBL040-AW-24-DA

Model	Input Voltage	Output Voltage	Wattage	Rated Current	Frequency	Location	Certificate
HBL040-AW-24-DA	120-277VAC	24VDC	40W	1.66A	50/60Hz	Dry or Damp location	ETL, Class 2

TRIAC Dimming for 120VAC / Non-Dimming for 277VAC

PN: HBL060-AW-24-DA

Model	Input Voltage	Output Voltage	Wattage	Rated Current	Frequency	Location	Certificate
HBL060-AW-24-DA	120-277VAC	24VDC	60W	2.5A	50/60Hz	Dry or Damp location	ETL, Class 2

TRIAC Dimming for 120VAC / Non-Dimming for 277VAC


PN:HBL096-AW-24-DA


Model	Input Voltage	Output Voltage	Wattage	Rated Current	Frequency	Location	Certificate
HBL096-AW-24-DA	120-277VAC	24VDC	96W	4A	50/60Hz	Dry or Damp location	ETL, Class 2

DIMENSIONS

TRIAC Dimming for 120VAC / Non-Dimming for 277VAC

TRIAC Dimming for 120VAC / Non-Dimming for 277VAC

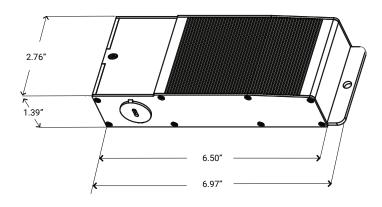


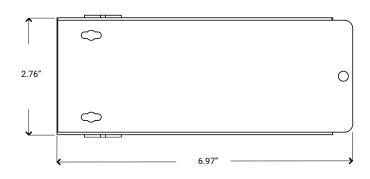


PN:HBL150-AW-24-DI

Model	Input Voltage	Output Voltage	Wattage	Rated Current	Location	Certificate
HBL150-AW-24-DI	120-277VAC	24VDC	150W	6.25A	Dry or Damp location	ETL, Class P

DIMENSIONS

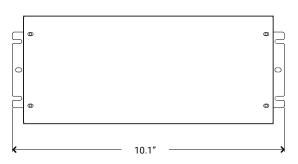











Constant Voltage TRIAC Dimmable Driver

Connecting Diagram



Dimmer Compatible Chart

Brand	Senies	Model	Load	Dimmability
	Ariadni	AYCL-153P	150W	10%-100%
	Diva	DV-600PR	600W	1%-100%
	Diva	DVCL-153P	150W	10%-100%
	Maestro	MACL-153MH	600W	10%-100%
	Maestro Wireless	MRF2-6CL	150W	10%-100%
	Rotary	D-600P	600W	10%-100%
Lutron	Electronic(ELV)	NTELV-300P	600W	10%-100%
	Skylark	S-600P	600W	10%-100%
	Skylark Conytour	CT-600P	600W	1%-100%
	Skylark Conytour	CTCL-153P	150W	10%-100%
	Toggler	TG-600P	600W	10%-100%
	Toggler	TCCL-153P	150W	10%-100%
	Sureslide	6633	600W	10%-100%
	Sureslide Decora	6674	600W	20%-100%
Leviton	Trimatron	6602	600W	20%-100%
	ILLVMATECH	IPL06	600W	1%-100%
Legrand	Adorne	ADTP703TU	700W	20%-100%
	Harmony	H703PTW	700W	10%-100%
Carran	Aspire	9540	1000W	10%-100%
Cooper	Devine	DAL06P	300W	10%-100%







LB-2830A RF Single Color Controller

- Ultra-sensitive, high-strength glass touch panel features a color line for accurate, fast, and precise brightness control.
- Control 4 different zones separately or synchronously with endless receivers in each zone.
- Save 3 brightness or scenes for each zone.
- 256-level brightness adjustment for each white.
- Receivers can work with WiFi-RF converter after installing "Easylighting" app on IOS and android systems.

Compatible with: LB-1009EAWI

TECHNICAL DETAILS

Output Signal	RF Signal
Power Supply	12-24 VDC
Power Consumption	<20 mA
Operating Temperature	0-40°C / 32°F-104°F
Dimensions	4.7"X2.9"X1.1"
Mounting	Wall Mount
Color	White

FCC / RoHS
4
916.5MHz
Glass
Single Color
5 Years limited warranty



LB-2833-K5-MONO Single Color Dimmer

RF wireless Single Color Remote can control 1 zone of receiver. This single color controller is compatible with all universal series RF receivers. One receiver can be paired with a maximum of 8 remote controllers. This device contains a button lithium battery that should be stored and disposed of properly. DO NOT expose the device to moisture.

Compatible with: LB-1009EAWI

TECHNICAL DETAILS

Output Signal	RF Signal
Power Supply	3V (CR2032 battery)
Operating Temperature	0-40°C / 32°F-104°F
Dimensions	2.5"X1.2"X0.35"
Color	White

Certifications	FCC / RoHS
Zones	Control 1 Zone of receiver
Frequency	916.5MHz
Rated	IP20
Warranty	5 Years limited warranty







LB-1009EAWI RF+WiFi Receiver/LED Controller 4Channels

The RGBW controller LB-1009EAWI is a 12-36 VDC constant voltage RF and WiFi controller with 4 channel output, offering 8A per channel. It is compatible with a variety of RF remotes and apps installed on iOS and Android systems, enabling control of single-color, dual-color LEDs, and RGBW LEDs.

Multiple zones can be controlled separately or synchronously with endless receivers in each zone. Built-in changing patterns are available and can be saved to each zone. The brightness of each R, G, B, W channel can be adjusted separately to achieve millions of changing colors.

Thanks to the built-in WiFi to RF module, a significant advantage of this WiFi controller is its compatibility with RF remotes and apps on iOS and Android systems directly, without the need for a WiFi-RF converter.

A free app is available (Easylighting) from the App Store and Google Play. Simply download it on your iOS or Android device, then search and connect your mobile device WLAN to the WiFi controller network.

TECHNICAL DETAILS

Input Voltage	12-36 VDC
Output Current	4x8A
Output Power	4x(96-288)W
Dimensions	6.6"X2.3"X1.1"

Frequency	869.5/916.5/434mhz
Certifications	FCC / RoHS
Color	White
Warranty	5-Years limited warranty



LED25W-24 (Power Supply) Optional for Wall Controller

Total Power: 25 Watts Input Voltage: 100-277 VAC UL Dry & Damp Location Rated

IP66

High Efficiency High Power Factor Analog Dimming (0-10V)

Black Magic Thermal Advantage, Plastic Housing