

12V

400

4.4W

50,000

Voltage
Lumens/Ft
Watts/Ft
Life (hours)

**Features:**

- ⌘ Pre-applied 3M tape allows for fast, hassle free installation
- ⌘ Field cuttable every 2" or 3 LED's.
- ⌘ Available in Warm White 3000K, Cool White 6500K.
- ⌘ Low profile for discreet locations.
- ⌘ Easy connectors allow for simple plug and play installation.
- ⌘ UV rays and infrared wavelength are non existent.
- ⌘ **Sold in 16' rolls.**
- ⌘ Highly efficient 400 Lumens PER/ FT for white LEDs.
- ⌘ Consumed power of 4.4W per foot

**Electrical:**

- ⌘ Elite LED tape light is offered with a 30W 12V driver (LB100-DR-12V-30W) that can power one run up to 6' or a 60W 12V driver (LB100-DR-12V-60W) that can power run up to 13', 100W driver that can power one run up to 16'.
- ⌘ Maximum continuous run of 16'.
- ⌘ Forward Voltage Drop: 1.92-2.2 V
- ⌘ (LB100-DC-12V-100-120W)



**50,000 hrs**  
**RATED LIFE**

LEO  
TAPE

LB-LED  
FLEXIBLE LED TAPE LIGHT

**Interconnector**

LB103-ACC-4  
LB103-ACC-5  
LB103-ACC-6  
LB103-ACC-7

**Power Connector**


LB103-ACC-8  
LB103-ACC-9  
LB103-ACC-10  
LB103-ACC-11

**Driver**

LB100-DR-12V-30W  
LB100-DR-12V-60W

**Coupling**

LB103-ACC-3

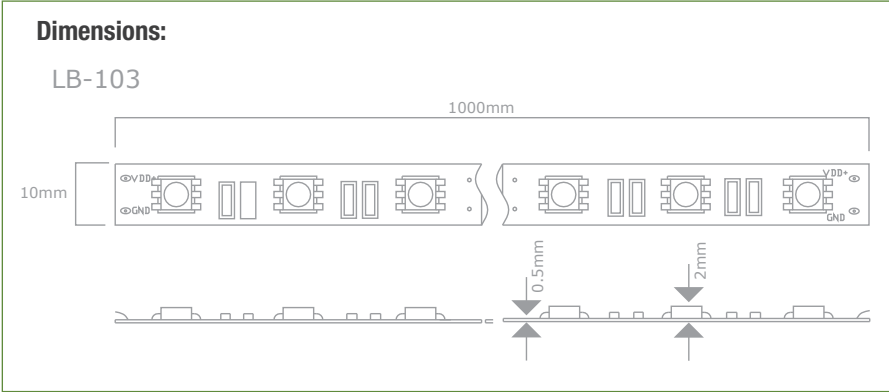

**For Hardwired Drivers go to page 434**

TYPE	COLOR	VOLTAGE	CURRENT (MA)	POWER (W/FT)	COLOR TEMP.	VIEW ANGLE	LM/FT	# OF DIODES/ FT	ACCESSORIES
LB103-15F-65K	○ COOL WHITE	12V DC	<1200	<4.4	6500K	130°	400	18	LB103-ACC-3 Coupling
LB103-15F-30K	○ WARM WHITE	12V DC	<1200	<4.4	3000K	130°	327	18	LB103-ACC-4 4" interconnector
									LB103-ACC-5 24" interconnector
									LB103-ACC-6 48" interconnector
									LB103-ACC-7 60" interconnector
									LB103-ACC-8 4" Power connector
									LB103-ACC-9 24" Power connector
									LB103-ACC-10 48" Power connector
									LB103-ACC-11 60" Power connector
									LB100-DR-12V-30W 30W Plug-in Driver
									LB100-DR-12V-60W 60W Plug-in Driver
									LB100-DC-12V-100-120 100W DC Hardwire Driver