

LB7000 Series
30°/60°/25°X45° Optic Options
Width 0.83" / 21mm
12 LEDs/FT
IP67



FEATURES

The LB7000 Lumi-PRO Strip Light Optics can be used as a wall grazer or wall washer depending on the beam spread specified. Crafted with precision, using designed optics this luminaire delivers a focused, intense beam of light that illuminates vertical surfaces with uniformity and control.

Whether accentuating textured walls, highlighting architectural details, or creating dramatic visual effects, the LB7000 excels in providing exceptional graze or wall washing lighting solutions for a variety of interior and exterior applications. Its beam ensures precise light distribution, maximizing the impact while minimizing light spill, resulting in captivating displays and immersive environments. With the LB7000 Lumi-Pro Strip Light, designers and architects have a powerful tool at their disposal to transform spaces and evoke emotions through the mastery of light.

Max run up to 16.4ft

Indoor/Wet Location (IP67)

30°/60°/25°X45° Optic Options

Field cuttable every 1.97"

Warranty: 5 years for indoor and 3 years for outdoor limited warranty

Color Temp. 4.4W/ft-30D Optics

3000K	488 lm/ft
4000K	511 lm/ft
5000K	549 lm/ft
6000K	490 lm/ft

ACCESSORIES (Tape light comes with 12" standard length female barrel connector attached)

ACC-CLP-LB7000
(25 Clips Included)



Plastic Clip with Screw included.

LB7000-EC-PF-EF
(2 Pieces Included)



End Cap Power feed

LB7000-EC-NPF-EF
(2 Pieces Included)



End Cap

WL-BCM-2P-WHT
(2 Pieces Included)



Male Barrel Connector
72" Length

WL-BCF-2P-WHT
(Female Barrel Connector Attached)



Female Barrel Connector
12" Length (1 Piece Included)


TECHNICAL DETAILS

Power	4.4W/ft
Voltage	24V
CRI	90+
LPW	118L/W
LED Qty	12/ft
Max Run(ft)	16.4ft
Cutting Length	1.97"
Dimensions	W0.83" X H0.41"
Working Temp.	-4F / +122F


Color T	Optics	LM/W	LM/FT	CRI
3000K	30D	105	488	91
3000K	25DX45D	101	468	91
3000K	60D	103	485	91
4000K	30D	115	511	93
4000K	25DX45D	110	490	93
4000K	60D	112	502	94

Color T	Optics	LM/W	LM/FT	CRI
5000K	30D	118	549	90
5000K	25DX45D	114	523	90
5000K	60D	114	527	90
6000K	30D	108	490	93
6000K	25DX45D	103	469	93
6000K	60D	106	465	93


DIMENSIONS

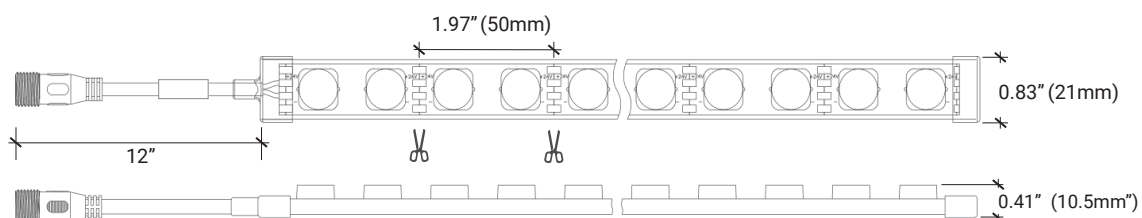


Optics

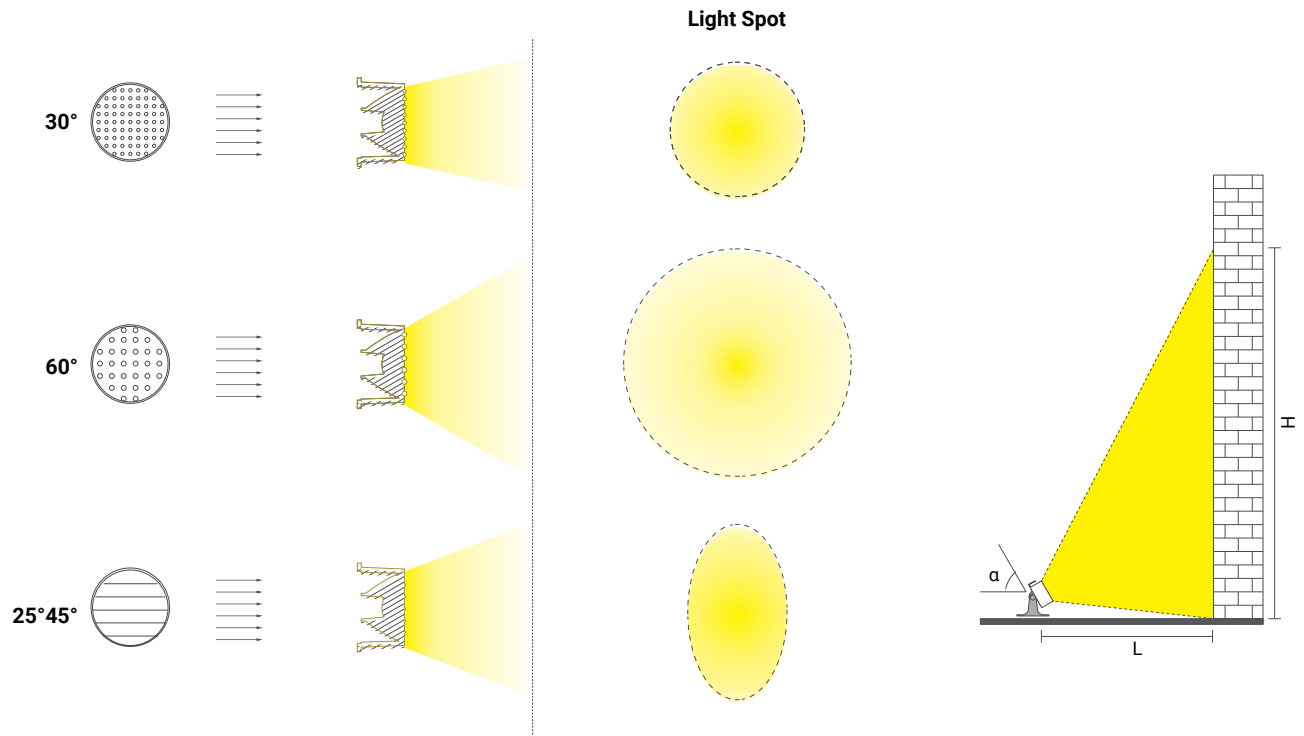

Mounting Clips



1. Fix the mounting clips.

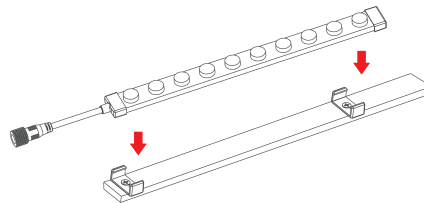

2. Press the tape light into the mounting clips.



3. Finished

NOTE: Install the clips at a distance of 2" to 4" apart, ensuring that the tape light is straight.

ORDERING SELECTION

Example: LB7000-4.4W-16F-60K-30D-24V

SERIES	WATTAGE	LENGTH	CCT	OPTICS	VOLTAGE	ACCESSORIES	DRIVER
LB7000	4.4W - 4.4W/ft	16F - 16ft / Roll CUS_ - Custom (Cutting length every 1.97")	30K - 3000K 40K - 4000K 50K - 5000K 60K - 6000K	30D - 30° 60D - 60° 45D - 25°x45°	24V - 24V	ACC-CLP-LB7000 - Plastic Clip LB7000-EC-PF-EF - End Cap Power Feed LB7000-EC-NPF-EF - End Cap WL-BCM-2P-WHT - Male Barrel Connector 72" Length WL-BCF-2P-WHT - Female Barrel Connector 12" Length	Refer to the next pages for available options.

CONTROLLERS

LB-2830A - RF single color controller
LB-2833-K5-MONO - RF single color dimmer
LED25W-24 - Power supply
LB-1009EAWI - RF+WiFi receiver

Due to the changes of constant improvement in LED technology, all details are subject to change without notice. Consult factory for up to date information.

Static White / Wall Controller RF

Power Supply



ED-96W-24V-TRIAC-DIM10



ED-192W-24V-TRIAC-DIM10



ED-288W-24V-TRIAC-DIM10

LED Receiver

LB-1009EAWi

Input Voltage	12-36 VDC
Output Current	4x8A
Output Power	4X(96-288)W
Dimensions	6.6"X2.3"X1.1"



LB-1009EAWi

WALL CONTROLLER

LB-2830A

Output Signal	RF Signal
Power Supply	12-24 DC



LED25W-24 (Power Supply)
(Optional for wall controller)



Control 4 zones.

Wall Control

LED Tape Light



LB7000

Static White / Wall Dimmer Controller RF

Power Supply



ED-96W-24V-TRIAC-DIM10



ED-192W-24V-TRIAC-DIM10



ED-288W-24V-TRIAC-DIM10

LED Receiver

LB-1009EAWi

Input Voltage	12-36 VDC
Output Current	4x8A
Output Power	4X(96-288)W
Dimensions	6.6"X2.3"X1.1"




LB-1009EAWi

WALL DIMMER CONTROLLER

LB-2833N-K5-MONO

Output Signal	RF Signal
Power Supply	3V (CR2032 battery)



Wall Control



Control 1 zone.

LED Tape Light




LB7000

Triac-Phase Cut/Triac ELV/0-10V/1-10V PWM/Potentiometer (5 in 1) Dimmable

PN: ED-30W-24V-TRIAC/DIM10

Model	Input Voltage	Output Voltage	Wattage	Max. Output current	Frequency	Location	Certificate
ED-30W-24V-TRIAC/DIM10	100-277VAC	24V	30W	1.25A	50/60Hz	Dry, Damp, and Wet locations	UL, cUL, FCC, Class 2, RoHS


Dimensions

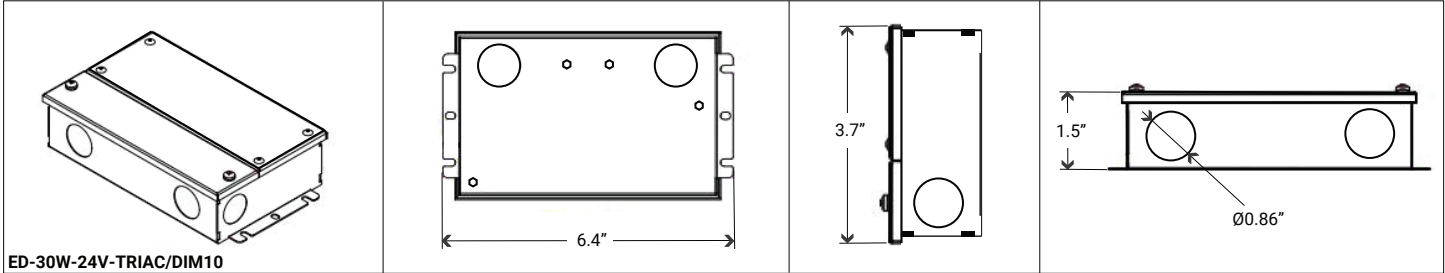

PN: ED-60W-24V-TRIAC/DIM10

Model	Input Voltage	Output Voltage	Wattage	Max. Output current	Frequency	Location	Certificate
ED-60W-24V-TRIAC/DIM10	100-277VAC	24V	60W	2.5A	50/60Hz	Dry, Damp, and Wet locations	UL, cUL, FCC, Class 2, RoHS


Dimensions

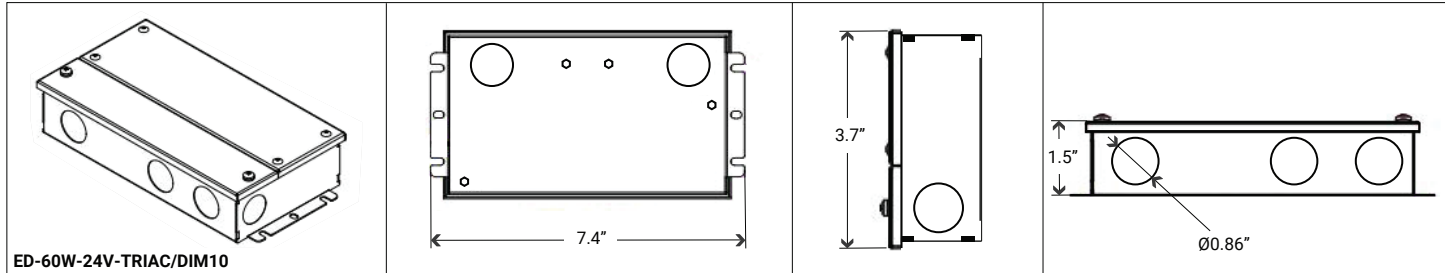

PN: ED-96W-24V-TRIAC/DIM10

Model	Input Voltage	Output Voltage	Wattage	Max. Output current	Frequency	Location	Certificate
ED-96W-24V-TRIAC/DIM10	100-277VAC	24V	96W	4A	50/60Hz	Dry, Damp, and Wet locations	UL, cUL, FCC, Class 2, RoHS

Dimensions

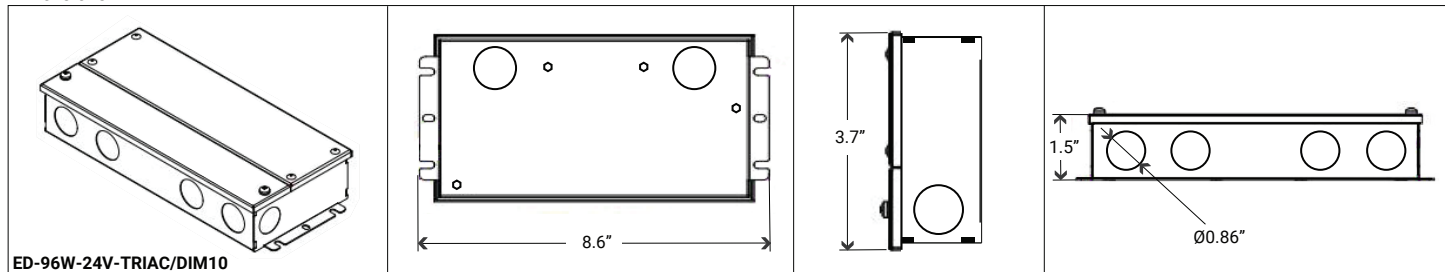


Triac-Phase Cut/Triac ELV/0-10V/1-10V PWM/Potentiometer (5 in 1) Dimmable

PN: ED-192W-24V-TRIAC/DIM10

Model	Input Voltage	Output Voltage	Wattage	Max. Output current	Frequency	Location	Certificate
ED-192W-24V-TRIAC/DIM10	100-277VAC	24V	192W	Multi 2X96W	50/60Hz	Dry, Damp, and Wet locations	UL, cUL, FCC, Class 2, RoHS


Dimensions

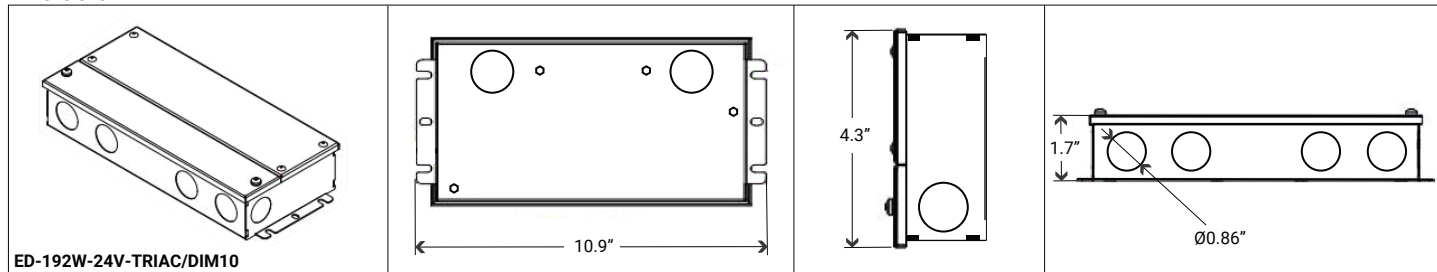

PN: ED-288W-24V-TRIAC/DIM10

Model	Input Voltage	Output Voltage	Wattage	Max. Output current	Frequency	Location	Certificate
ED-288W-24V-TRIAC/DIM10	100-277VAC	24V	288W	Multi 3X96W	50/60Hz	Dry, Damp, and Wet locations	UL, cUL, FCC, Class 2, RoHS


Dimensions

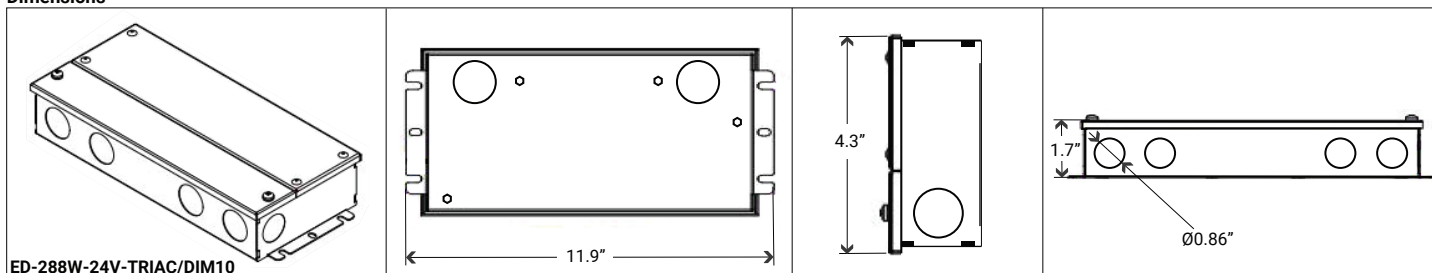

PN: ED-384W-24V-TRIAC/DIM10


Model	Input Voltage	Output Voltage	Wattage	Max. Output current	Frequency	Location	Certificate
ED-384W-24V-TRIAC/DIM10	110-277VAC	24V	384W	Multi 4X96W	50/60Hz	Dry, Damp, and Wet locations	UL, cUL, Class 2, RoHS

Dimensions

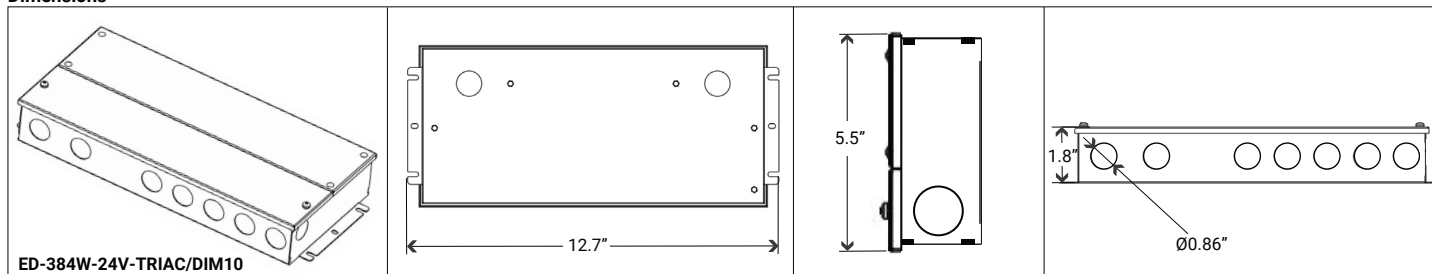


Dimming Operation and Connecting Diagram

- **Using two ways of dimming at the same time**, you must be assured that LED lighting is up to the max. Brightness then you could operate with the other dimming;

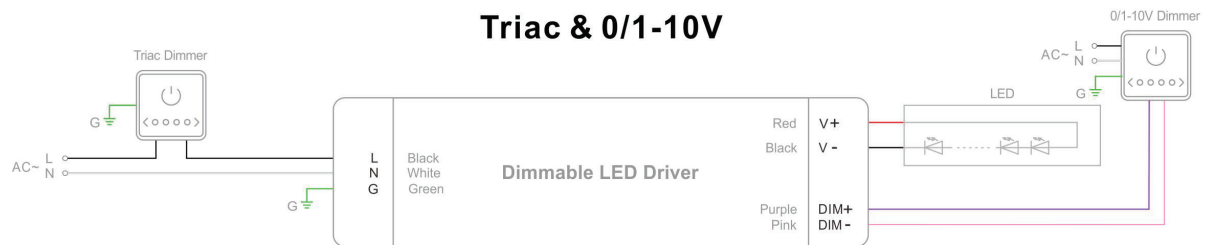




- **Using one dimming ---TRIAC/Phase cut dimming**

1. The Pulse-Width Modulation (PWM) of output voltage can be adjusted through input terminal of the AC phase line(L) by connection a phase /Triac dimmer or lighting system.
2. Working with forward phase, MLV and Reverse phase , ELV, TRIAC dimmers or light system.
3. Min. loading is about 10%
4. Please try to use dimmers with power at least 1.5 times as the output power of the driver.

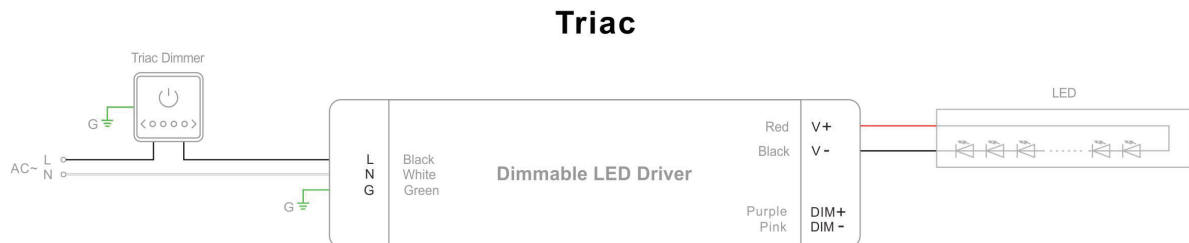

- **Using one dimming ---0-10V/ 1-10V/ 10V PWM/ Potentiometer dimming**

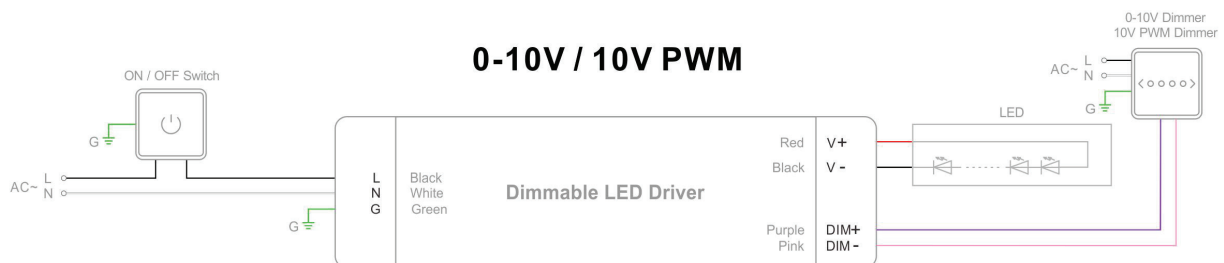

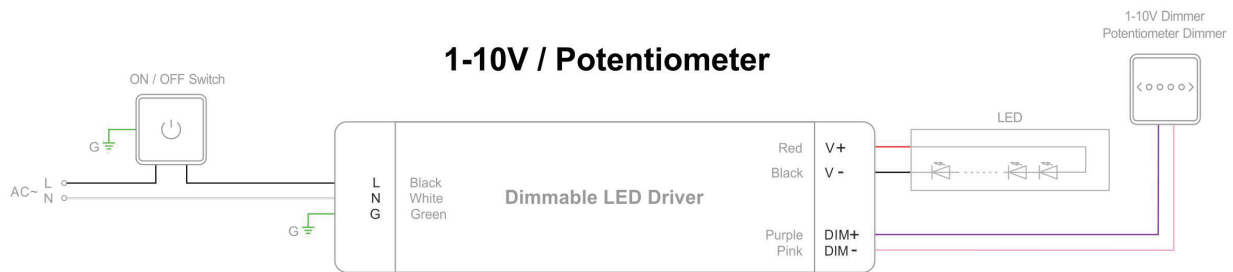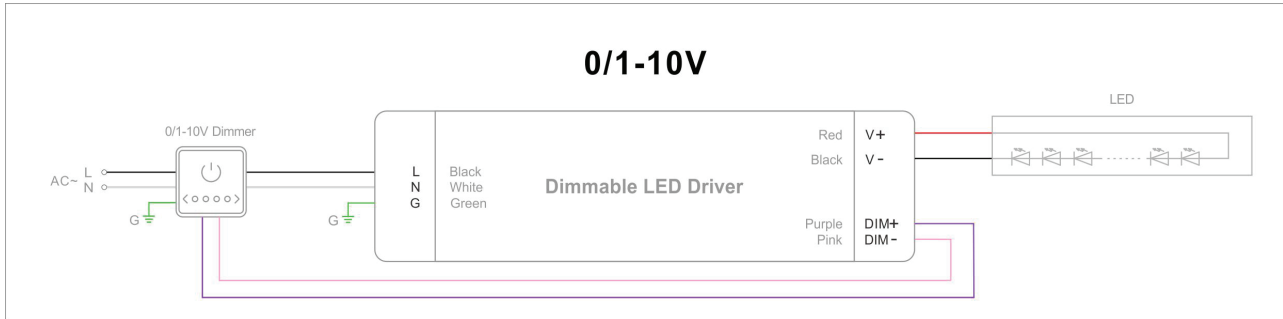

Triac/Phase cut & 0-10V/1-10V PWM/Potentiometer (5 in 1) Dimmable

Constant Voltage TRIAC Dimmable Driver

PN: HBL040-AW-24-DA

Model	Input Voltage	Output Voltage	Wattage	Rated Current	Frequency	Location	Certificate
HBL040-AW-24-DA	120-277VAC	24VDC	40W	1.66A	50/60Hz	Dry or Damp location	ETL, Class 2

TRIAC Dimming for 120VAC / Non-Dimming for 277VAC

PN: HBL060-AW-24-DA

Model	Input Voltage	Output Voltage	Wattage	Rated Current	Frequency	Location	Certificate
HBL060-AW-24-DA	120-277VAC	24VDC	60W	2.5A	50/60Hz	Dry or Damp location	ETL, Class 2



TRIAC Dimming for 120VAC / Non-Dimming for 277VAC

PN: HBL096-AW-24-DA

Model	Input Voltage	Output Voltage	Wattage	Rated Current	Frequency	Location	Certificate
HBL096-AW-24-DA	120-277VAC	24VDC	96W	4A	50/60Hz	Dry or Damp location	ETL, Class 2

TRIAC Dimming for 120VAC / Non-Dimming for 277VAC

DIMENSIONS

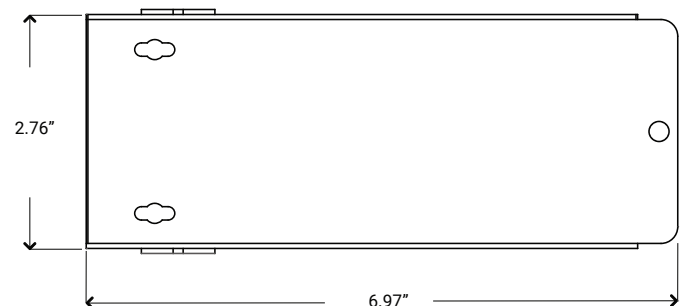
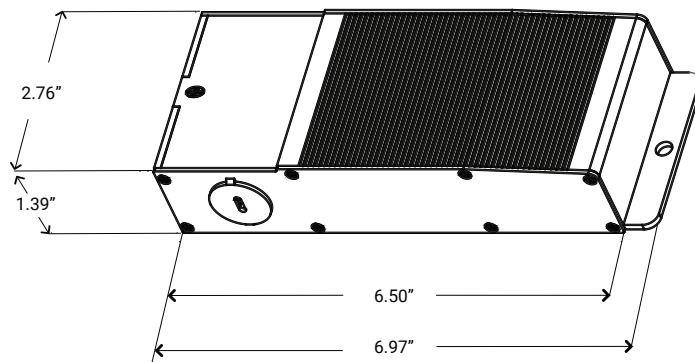


PN: HBL150-AW-24-DI

Model	Input Voltage	Output Voltage	Wattage	Rated Current	Location	Certificate
HBL150-AW-24-DI	120-277VAC	24VDC	150W	6.25A	Dry or Damp location	ETL, Class P


TRIAC Dimming for 120VAC / Non-Dimming for 277VAC

DIMENSIONS

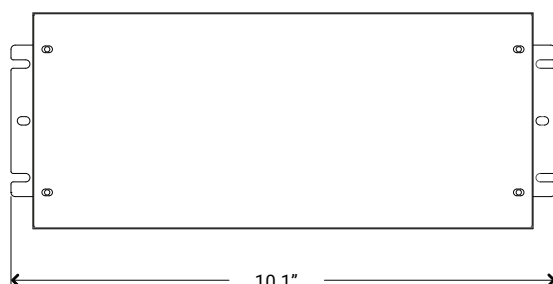

Constant Voltage TRIAC Dimmable Driver

Connecting Diagram

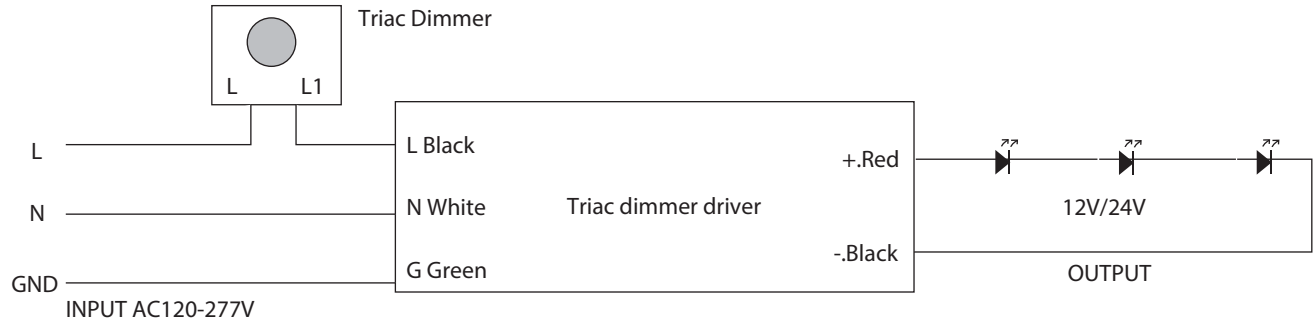

Dimmer Compatible Chart

Brand	Series	Model	Load	Dimmability
Lutron	Ariadni	AYCL-153P	150W	10%-100%
	Diva	DV-600PR	600W	1%-100%
	Diva	DVCL-153P	150W	10%-100%
	Maestro	MACL-153MH	600W	10%-100%
	Maestro Wireless	MRF2-6CL	150W	10%-100%
	Rotary	D-600P	600W	10%-100%
	Electronic(ELV)	NTELV-300P	600W	10%-100%
	Skylark	S-600P	600W	10%-100%
	Skylark Conytour	CT-600P	600W	1%-100%
	Skylark Conytour	CTCL-153P	150W	10%-100%
	Toggler	TG-600P	600W	10%-100%
	Toggler	TCCL-153P	150W	10%-100%
Leviton	Sureslide	6633	600W	10%-100%
	Sureslide Decora	6674	600W	20%-100%
	Trimatron	6602	600W	20%-100%
	ILLVMATECH	IPL06	600W	1%-100%
Legrand	Adorne	ADTP703TU	700W	20%-100%
	Harmony	H703PTW	700W	10%-100%
Cooper	Aspire	9540	1000W	10%-100%
	Devine	DAL06P	300W	10%-100%



LB-2830A RF Single Color Controller

- Ultra-sensitive, high-strength glass touch panel features a color line for accurate, fast, and precise brightness control.
- Control 4 different zones separately or synchronously with endless receivers in each zone.
- Save 3 brightness or scenes for each zone.
- 256-level brightness adjustment for each white.
- Receivers can work with WiFi-RF converter after installing "Easylighting" app on IOS and android systems.

Compatible with: LB-1009EAWI

TECHNICAL DETAILS

Output Signal	RF Signal
Power Supply	12-24 VDC
Power Consumption	<20 mA
Operating Temperature	0-40°C / 32°F-104°F
Dimensions	4.7"X2.9"X1.1"
Mounting	Wall Mount
Color	White

Certifications	FCC / RoHS
Zones	4
Frequency	916.5MHz
Surface	Glass
Control	Single Color
Warranty	5 Years limited warranty



LB-2833-K5-MONO Single Color Dimmer

RF wireless Single Color Remote can control 1 zone of receiver. This single color controller is compatible with all universal series RF receivers. **One receiver can be paired with a maximum of 8 remote controllers.** This device contains a button lithium battery that should be stored and disposed of properly. **DO NOT expose the device to moisture.**

Compatible with: LB-1009EAWI

TECHNICAL DETAILS

Output Signal	RF Signal
Power Supply	3V (CR2032 battery)
Operating Temperature	0-40°C / 32°F-104°F
Dimensions	2.5"X1.2"X0.35"
Color	White

Certifications	FCC / RoHS
Zones	Control 1 Zone of receiver
Frequency	916.5MHz
Rated	IP20
Warranty	5 Years limited warranty



LB-1009EAWI RF+WiFi Receiver/LED Controller 4Channels

The RGBW controller LB-1009EAWI is a 12-36 VDC constant voltage RF and WiFi controller with 4 channel output, offering 8A per channel. It is compatible with a variety of RF remotes and apps installed on iOS and Android systems, enabling control of single-color, dual-color LEDs, and RGBW LEDs.

Multiple zones can be controlled separately or synchronously with endless receivers in each zone. Built-in changing patterns are available and can be saved to each zone. The brightness of each R, G, B, W channel can be adjusted separately to achieve millions of changing colors.

Thanks to the built-in WiFi to RF module, a significant advantage of this WiFi controller is its compatibility with RF remotes and apps on iOS and Android systems directly, without the need for a WiFi-RF converter.

A free app is available (Easylighting) from the App Store and Google Play. Simply download it on your iOS or Android device, then search and connect your mobile device WLAN to the WiFi controller network.

TECHNICAL DETAILS

Input Voltage	12-36 VDC
Output Current	4x8A
Output Power	4x(96-288)W
Dimensions	6.6"X2.3"X1.1"

Frequency	869.5/916.5/434mhz
Certifications	FCC / RoHS
Color	White
Warranty	5-Years limited warranty



LED25W-24 (Power Supply) Optional for Wall Controller

Total Power: 25 Watts
Input Voltage: 100-277 VAC
UL Dry & Damp Location Rated
IP66
High Efficiency
High Power Factor
Analog Dimming (0-10V)
Black Magic Thermal Advantage, Plastic Housing