


LD4RIC-AT

4" Remodel IC Housing for use with RL400 series
LED Module lighting components

SAME DAY
SHIPPING AVAILABLE

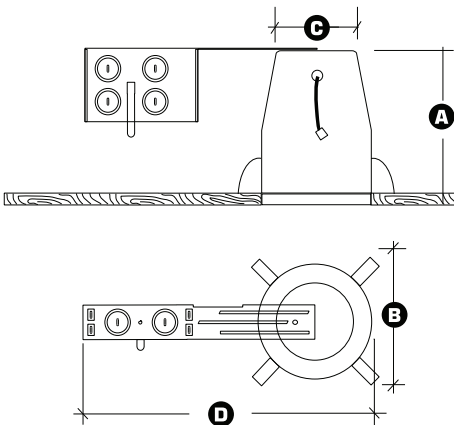

- A** Height = 5-1/2"
- B** Width = 4-1/2"
- C** Cut-out = 4-3/8"
- D** Length = 11"



**IC
RATED**

TO BE USED WITH RL400 SERIES LED MODULE LIGHTING COMPONENT

DESCRIPTION - 4" Remodel IC housing for use with RL400 LED series LED Module trims. Designed for new construction installations and suitable for use in insulation covered or non-insulation covered ceilings. The LD4RIC-AT-DIMTR housing is engineered with a unique 'EZ-connect' wiring system, that when used with the RL400 trim, with California Title-24 (compliances pending). The unique EZ-connect system also meets other state and national regulatory mandates. LED Module connects effortlessly to housing, virtually eliminating mis-wiring and potential shock hazards.

NOTE - Complete system includes LD4RIC-AT-DIMTR housing and LED Modules RL400 series trim. RL400 LED Modules trim must be ordered separately.

HOUSING - Die-formed aluminum for maximum heat dissipation and rust protection. Housing can be installed in 1/2" to 1-3/8" thick ceilings. Housing is IC rated for direct contact with insulation and can be used in IC and NON-IC applications. May be installed in 2" x 8" joist construction.

CONNECTION - Polarity-specific EZ-connect system engineered to match with Elite LED Module trims. Meets strict code requirements where Edison Base Sockets have been banned.

INSTALLATION - Four preinstalled spring clips which secure the housing firmly into ceiling to accommodate different ceiling thicknesses from 1/2" to 1-3/8".

JUNCTION BOX - UL Listed for through-branch circuit wiring, provided with four 1/2" knockouts, one 3/4" knockout and four Romex knockouts with true pry-out slots and strain clamps. Designed for straight through conduit runs.

Example: LD4RIC-AT-DIMTR-120

THERMAL PROTECTION - Standard thermal protection device guards against improper installation and misuse of insulation material.

ELITE LED MODULE SOLD SEPARATELY - LED Modules unique 'EZ-connect' wiring system is Title 24-2013 compliant when used with the LD4R-AT housing. The unique EZ-connect system also meets other state and national regulatory mandates. System is a UL Listed disconnect system that preserves the integrity of the energy-efficient system by insuring only Elite brand trims are used. The EZ-connect system prevents installation of less efficient incandescent luminaires and LEDs.

AIR-SHUT - Provided with gasket to prevent airflow from heated or air-conditioned spaces. Meets or exceeds all national air flow requirements.

LISTING

c-UL-us - listed for Damp location
c-UL-us - listed for feed Through Wiring
LM79/LM80
Covered by U.S. Patent Number: 7717390B1

DIMMING INFORMATION

DIMTR (Triac Dimming)



HOUSING TYPE				
<input type="checkbox"/> LD4RIC-AT-DIMTR-120 - Used For Triac Dimming Module				
<input type="checkbox"/> LD4RIC-AT-DIM10 - Used For 0-10V Dimming Module				
LD4RIC-AT-277 - Used For Non Dimming Module				
TRIM TYPE	650L/900L SERIES	CCT	CRI	FINISH
<input type="checkbox"/> RL430 (Baffle)	<input type="checkbox"/> 650L-DIMTR-120 <input type="checkbox"/> 650L-DIM10	<input type="checkbox"/> 27K <input type="checkbox"/> 30K <input type="checkbox"/> 35K	<input type="checkbox"/> 85+ <input type="checkbox"/> 90+	<input type="checkbox"/> W-WH <input type="checkbox"/> CP-CP <input type="checkbox"/> P-WH <input type="checkbox"/> BZ-BZ <input type="checkbox"/> SN-SN <input type="checkbox"/> P-BK
<input type="checkbox"/> RL411 (Baffle Wall Wash)	<input type="checkbox"/> 650L-277 (Non Dimmable) <input type="checkbox"/> 900L-DIMTR-120 <input type="checkbox"/> 900L-DIM10	<input type="checkbox"/> 40K <input type="checkbox"/> 50K (CRI 85+ Only)		
<input type="checkbox"/> RL407 (Reflector)	<input type="checkbox"/> 900L-277 (Non Dimmable)		<input type="checkbox"/> 85+ <input type="checkbox"/> 90+	<input type="checkbox"/> CL-WH <input type="checkbox"/> RG-PB <input type="checkbox"/> CP-WH <input type="checkbox"/> CL-CH <input type="checkbox"/> W-WH <input type="checkbox"/> CP-CP <input type="checkbox"/> MB-WH <input type="checkbox"/> SN-WH <input type="checkbox"/> BZ-BZ <input type="checkbox"/> MB-BK <input type="checkbox"/> RG-WH <input type="checkbox"/> CL-SN <input type="checkbox"/> SN-SN
<input type="checkbox"/> RL422 (Reflector Wall Wash)				
<input type="checkbox"/> RL428	<input type="checkbox"/> 650L-DIMTR-120	<input type="checkbox"/> 30K	<input type="checkbox"/> 85+ <input type="checkbox"/> 90+	<input type="checkbox"/> W-WH
<input type="checkbox"/> REL437	<input type="checkbox"/> 700L-DIMTR-120 <input type="checkbox"/> 1100L-DIMTR-120	<input type="checkbox"/> 27K <input type="checkbox"/> 40K <input type="checkbox"/> 30K <input type="checkbox"/> 50K	<input type="checkbox"/> 90+	<input type="checkbox"/> W-WH