



LUMENS	4000L, 6000L, 7000L
CCT & TECHNOLOGIES	3000K, 3500K, 4000K
COLOR QUALITY	3 Step MacAdam Ellipse
MOUNTING	Pendant, Suspended
DIMMING & CONTROLS	0-10V Flicker Free 1% Dimming Standard (DIM10) LUTH, DIMTR

DIMENSIONS	22.5" x 24.8", (M) 33" x 36.3", (L) 43.4" x 47.8"
HEIGHT	14", 16", 18"
FIXTURE FINISH	BK (Black), WH (Matt White), SI (Silver), Custom RAL
MATERIAL COLORS	Refer to SoftSense Material Color Chart
PHOTOMETRIC TESTS	In Accordance with IES LM79-08 and LM-80, and TM-30

The **Rhapsody** family comprises acoustic pendant and suspended luminaires, blending timeless form with contemporary performance. Defined by a clean, classic silhouette, each fixture delivers beautifully balanced illumination while discreetly enhancing acoustic comfort. This harmonious fusion of light and sound makes **Rhapsody** an elegant solution for a wide range of environments, including educational spaces, boardrooms, offices, hospitality settings, lobbies, and restaurants.

The **Hexagon** features an acoustic shroud surrounding the luminaire with a sculptural structure that softens sound while adding architectural depth. Thoughtfully crafted to enhance both acoustics and aesthetics, bringing refined texture to any modern space.



ACOUSTIC MATERIAL - 9mm / 0.35" Thickness

Our panels come in 4' x 8' and are made from 100% polyethylene terephthalate (PET), with 50% post-consumer recycled material. PET is a moisture resistant green product with no added chemicals, binders, adhesives or dyes.


ACOUSTIC PANEL PERFORMANCE - 4' x 8' Panels

Acoustic performance of specific fixture / product will greatly vary based on mounting, installation, and configuration in a space.

Noise Reduction Coefficient (NRC) - 0.75

Weighted Sound Absorption Coefficient - $a_w = 0.85$

NRC is a widely used standard to test sound absorption for 2-dimensional objects. It is the average absorption coefficient obtained from four key 1/3 octave frequencies: 250, 500, 1000, 2000 Hz.

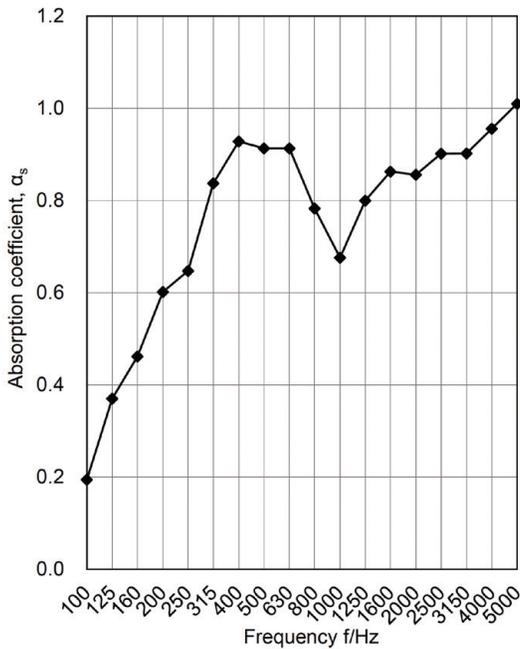

OPTICS & PERFORMANCE

The LOOP Hexagonal LED Suspended Direct/Indirect Luminaire is a high-performance lighting solution designed to enhance any space with its sleek design and seamless, uniform glow.

LUMINAIRE CONSTRUCTION

Built as one continuous, 4" tall extruded aluminum piece with a matching seamless, flexible PC diffuser lens, this luminaire ensures both ease of installation and a minimalist, elegant charm.

ACOUSTIC CONSTRUCTION

The metal frame is positioned atop the fixture, securely sandwiched between two layers of our acoustic panels. This design ensures a durable structure that resists sagging over time while enhancing noise absorption due to the increased material thickness.

MOUNTING / SUSPENSION

The fixture includes a central canopy mounting as the standard configuration. For side canopy mounting, field modification is required. The luminaire is supplied with three 11' suspension cables, one central canopy, one wire holder, and one side canopy.

WARRANTY

Limited five-year warranty.

LISTINGS


IP40
L80B20 at 50,000 hours
All LED luminaires are rated and tested to LM-79 and LM-80 standards by an independent laboratory.

MAINTENANCE

Acoustic material can be cleaned with a clean, soft, lint-free cloth or a vacuum.

LUMEN DISTRIBUTION

CCT switch located inside the profile



LUMEN DETAILS

Based on 4000K, 90+ CRI.
Actual wattage may vary +/- 5%


DIRECT		
LUMINAIRE SIZE	LUMENS	WATTS
23" x 20"	4000	36
35" x 30"	6000	55
47" x 40"	7000	72

Example: **LOOP-HEX-RHAPSODY-SOFT-HEXAGON-22IN-4000L-DIM10-MVOLT-40K-85-WH-SM-GRN**

LOOP-HEX-RHAPSODY-SOFT													GRN
SERIES	STYLE	SIZE	DIRECT LUMENS	DIMMING	VOLTAGE	CCT	CRI	EMERGENCY	FINISH	MOUNTING OPTION	COLOR	<small>Refer to SoftSense material color chart for options</small>	
LOOP-HEX-RHAPSODY-SOFT SoftSense LED Pendant	HEXAGON - Hexagon	22IN - 22.6" L x 24.8" W	4000L - 4000 Lumens NLS ² - no light source	DIM10 - 0-10V Dimming	120 277 MVOLT 347 ²	30K - 3000K 35K - 3500K 40K - 4000K	85 90+	0-EMG-LED-25W (EMG and test switch would be ceiling install)	WH - Matte White BK - Black SI - Silver RAL ¹ - custom color	SCM10 - Side Canopy Mount up to 10 ft. SCM20 - Side Canopy Mount up to 20 ft. CCM10 - Central Canopy Mount up to 10 ft. CCM20 - Central Canopy Mount up to 20 ft.	example: GRN - Green		
		33IN - 33" L x 36.3" W	6000L - 6000 Lumens NLS ² - no light source										
		43IN - 43.4" L x 47.6" W	7000L - 7000 Lumens NLS ² - no light source										
												<small>CUS¹ - custom¹ NLS² - no light source</small>	



¹ Consult Factory
² No Light Source, please skip to "Mounting Option"

DIMENSIONS


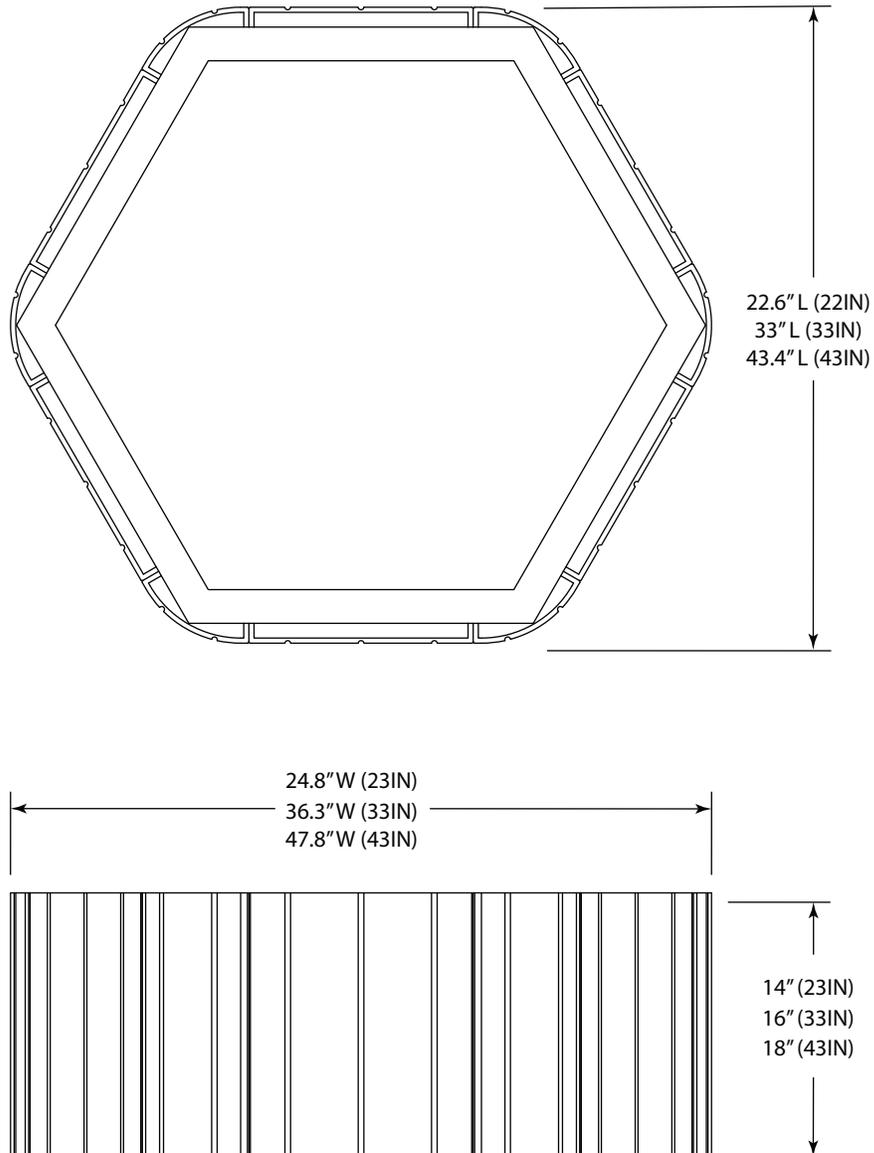


MOUNTING OPTIONS



The fixture comes with a central canopy mounting as the standard option. If side canopy mounting is desired, it must be modified in the field.

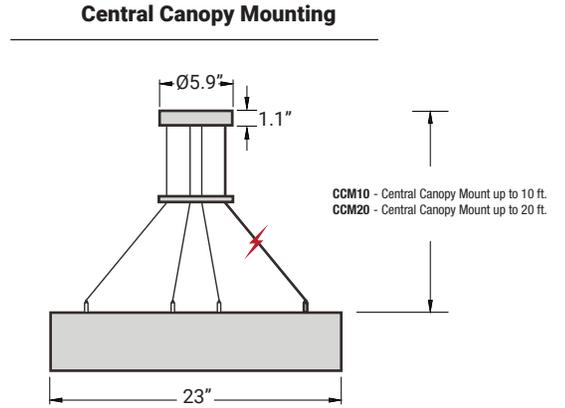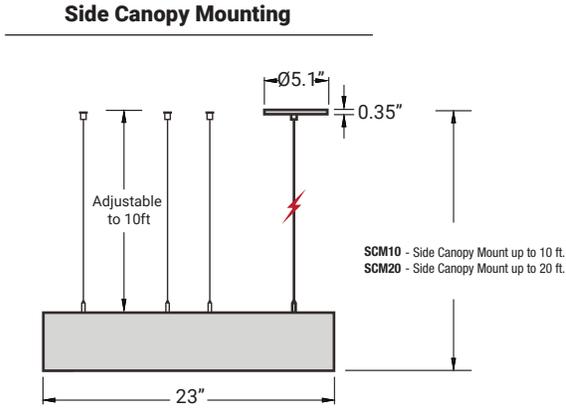

The driver and CCT switch are located inside the profile. The luminaire comes with 4 suspension cables, each 11ft in length, 1 central canopy, 1 wire holder, and 1 side canopy.

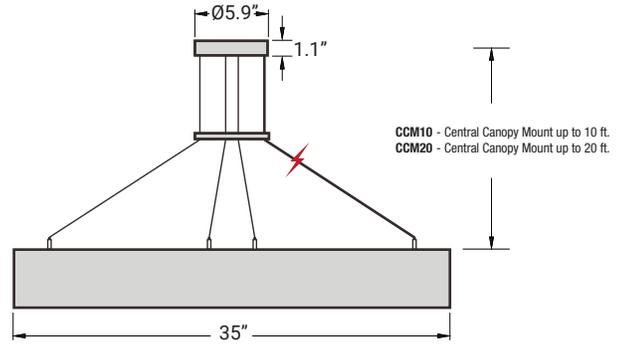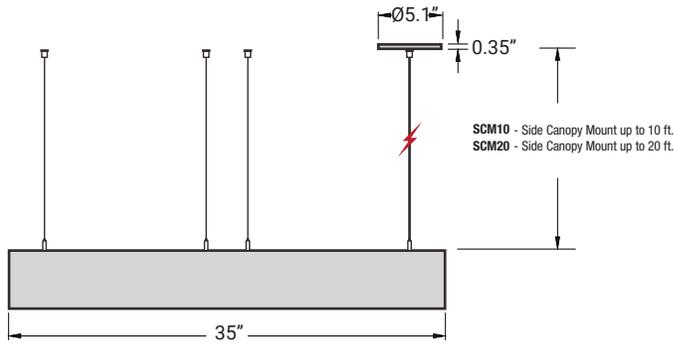

The driver and CCT switch are located inside the profile. The luminaire comes with 4 suspension cables, each 11ft in length, 1 central canopy, 1 wire holder, and 1 side canopy.

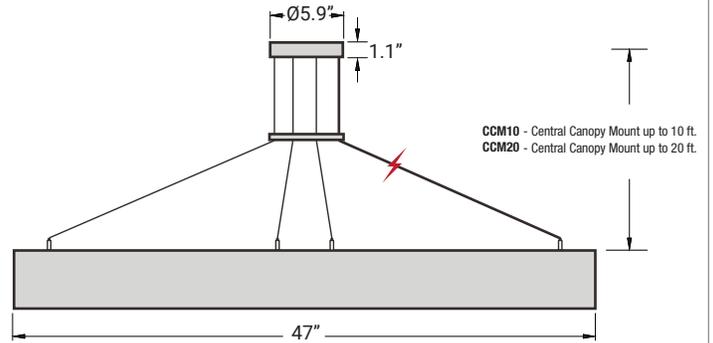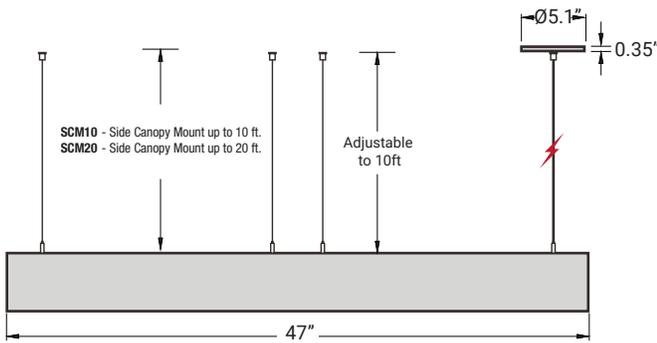

The driver and CCT switch are located inside the profile. The luminaire comes with 4 suspension cables, each 11ft in length, 1 central canopy, 1 wire holder, and 1 side canopy.

1 Power cable

STANDARD COLORS

Panel Thickness: 9 mm / 0.35" (+/- 0.25 mm)

All panels ASTM E84-16 Fire Rated

PURE PUR	STONE STN	BONE BNE	PEACH PCH
GRAY NOISE NSE	GREIGE GRG	SAND SND	ORANGE ORA
PEBBLE PEB	FOG FOG	DUST DST	BRASS BRS
GRAVEL GRV	WARM GRAY WGR	LATTE LTE	BRONZE BRZ
SHADOW SHD	HIPPO HIP	CLAY CLA	RUST RST
ASPHALT ASP	PERIWINKLE PRW	KELP KLP	PECAN PEC
ABYSS ABS	SKY BLUE SBL	CROCODILE CRC	FIG FIG
NIGHT NIT	SAPPHIRE SAP	SAGE SGE	EGGPLANT EGP
MIDNIGHT MDN	NAVY NVY	PISTACHIO PST	AMETHYST AME
EVERGREEN EVG	SEAWEED SWD	MATCHA MCH	PLUM PLU
MOSS MOS	BAY BAY	OLIVE OLV	CABBAGE CBG
COFFEE CFE	SEA SEA	GREEN GRN	PINK PNK
WINE WIN	DARK TEAL DTL	SUNSHINE SUN	PASSION PAS



quick ship available for any color depending on order quantity
*all colors are ASTM E84-16 fire rated, select colors are available as Class A