



Side canopy mounting shown.

FEATURES



The LOOP MINI ROUND LED Suspended Direct light is an advanced, high-performance luminaire designed to visually elevate a space through its style and uninterrupted, even, glow.

Built from a single, continuous extruded aluminum profile, the luminaire is available in a compact size of 1.38" W x 1.38" H. A flexible polycarbonate diffuser allows for simplified installation while maintaining a clean, minimalist appearance.

Available in seven different sizes and seven lumen outputs, for a variety of design options. An internal driver and adjustable CCT switch inside the canopy allow for versatile color temperature transitions during or after installation, to suit different atmospheres.

Two suspended mounting options (central canopy and side canopy) with an adjustable cord allow for playful positioning at various angles, alone, or in group or "cluster" mountings.


Available in classic black or white finishes or custom RAL colors to seamlessly complement any interior style. Ideal for transforming office, commercial, lobby, and hospitality lighting into an artful experience.

Two Suspended Mounting Options Included		SIZE	LUMENS	WATTS
Central Canopy 	Side Canopy 	Ø23"	4000L	38W
		Ø35"	6000L	57W
		Ø47"	8000L	76W
		Ø60"	10000L	97W
		Ø72"	11000L	113W
		Ø96"	15500L	153W
		Ø120"	19000L	191W

TECHNICAL DETAILS

Lumens	4000L, 6000L, 8000L, 10000L, 11000L, 15500L, 19000L
CCT	3000K/3500K/4000K
CRI	90+
Power	38W, 57W, 76W, 97W, 113W, 153W, 191W
Ring Size	Ø23", Ø35", Ø47", Ø60", Ø72", Ø96", Ø120"
Mounting	Suspended Mount (Adjustable 11ft length cords)
IP Rating	IP40
Color	<input type="radio"/> White <input type="radio"/> Black <input type="radio"/> Custom RAL

Input Voltage	120-277 VAC
Efficiency	100L/W
Dimming	0-10V Dimming
Life Time	L80B20 at 50,000 hours
Material	Aluminum Body / PC Diffuser
Accessories: (Included)	1 Central Canopy 1 Side Canopy 1 Wire Holder 4 Suspension Cables
"Side canopy or central canopy mounting options".	

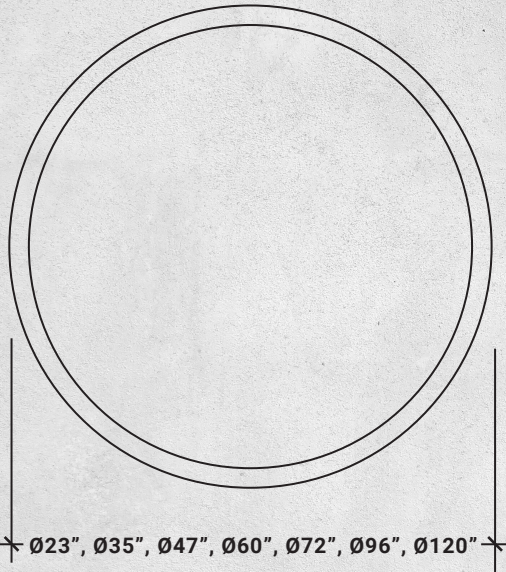

SIZES

Ø23"	Width 1.38" / Height 1.38"
Ø35"	Width 1.38" / Height 1.38"
Ø47"	Width 1.38" / Height 1.38"
Ø60"	Width 1.38" / Height 1.38"
Ø72"	Width 1.38" / Height 1.38"
Ø96"	Width 1.38" / Height 1.38"
Ø120"	Width 1.38" / Height 1.38"



FLICKER FREE

Please refer to the line drawings, as some fixtures are constructed from four or six pieces instead of a single aluminum extruded piece due to their size. For these sizes, a central canopy mounting option is not available (Ø96", Ø120").

Example: LOOP-MINI-RD-LED-1.38-23-4000L-DIM10-MVOLT-30K/35K/40K-90-WH-SM

SERIES	PROFILE SIZE	LUMINAIRE SIZE	LUMENS	DIMMING/VOLTAGE	CCT
LOOP-MINI-RD-LED	1.3 -1.38"	23 - Ø23.4" 35 - Ø35.2" 47 - Ø47.1" 60 - Ø60.4" 72 - Ø72.2" 96 - Ø95.8" 120 - Ø119.4"	4000L - 3800L 6000L - 5700L 8000L - 7600L 10000L - 9700L 11000L - 11300L 15500L - 15300L 19000L - 19100L	DIM10-MVOLT ¹	30K/35K/40K - 3000K-3500K-4000K

CRI	COLOR	EMERGENCY	MOUNTING
90 - 90+	WH - White BK - Black RAL - Consult factory	REM-EMG-LED-25W-HV-FLEX ² REM-EMG-LED-15W-HV-FLEX ²	SM - Suspended Mount ³

1. For more dimming options, please consult factory.

2. Remote emergency option.

3. The fixture comes with a central canopy mounting as the standard option. If side canopy mounting is required, it must be modified in the field. Please refer to the line drawings, as some fixtures are constructed from four or six pieces instead of a single aluminum extruded piece due to their size. For these sizes, a central canopy mounting option is not available (Ø96", Ø120").

Note: The lead time for all options listed above is approximately 4-5 weeks due to their mini profile and specialized technology.


Mounting Options

The fixture comes with a central canopy mounting as the standard option. If side canopy mounting is desired, it must be modified in the field.




L1

Side Canopy Mounting

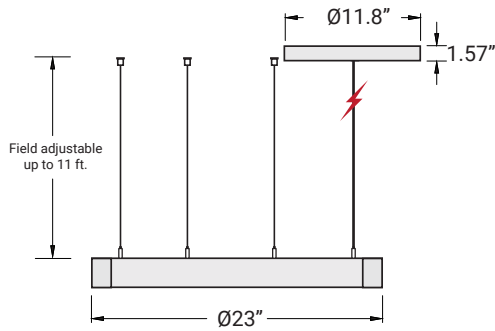



Central Canopy Mounting

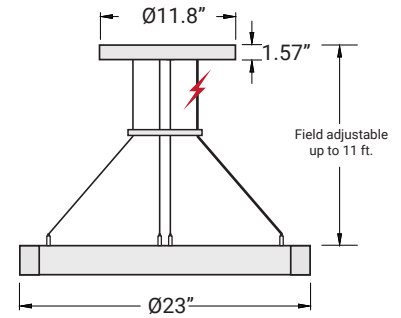

⚡ 1 Power cable

The driver and CCT switch are located inside the canopy. The luminaire comes with 4 suspension cables, each 11ft in length, 1 central canopy, 1 wire holder, and 1 side canopy.



L2

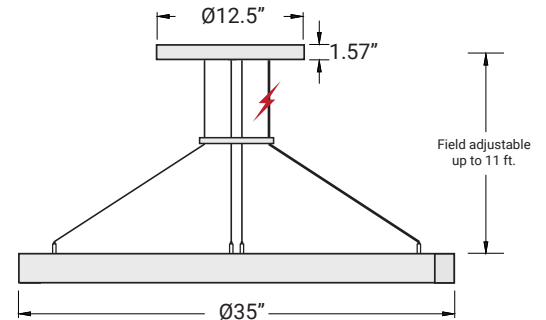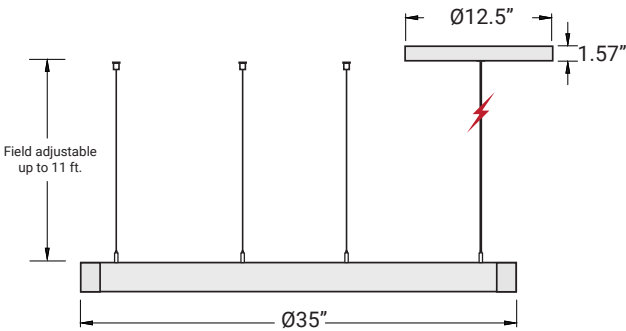

⚡ 1 Power cable

The driver and CCT switch are located inside the canopy. The luminaire comes with 4 suspension cables, each 11ft in length, 1 central canopy, 1 wire holder, and 1 side canopy.

L3

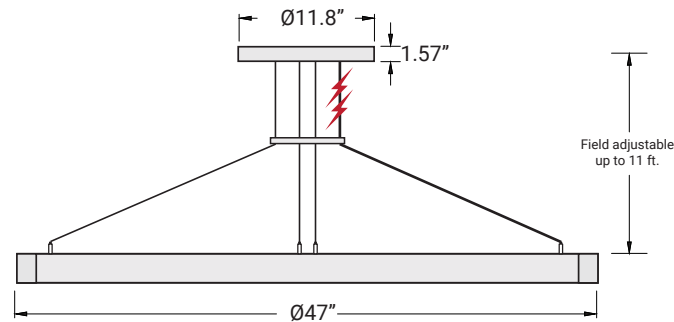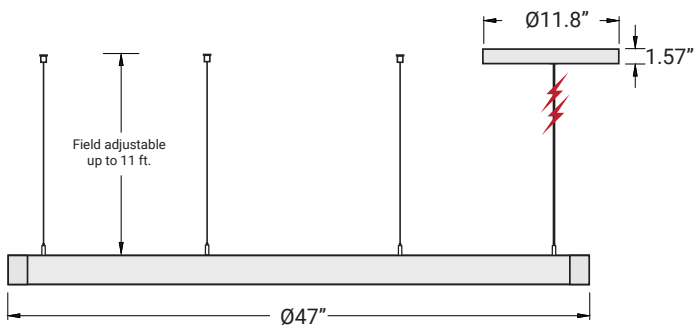

⚡ 2 Power cables

The drivers and CCT switch are located inside the canopy. The luminaire comes with 4 suspension cables, each 11ft in length, 1 central canopy, 1 wire holder, and 1 side canopy.


Mounting Options

The fixture comes with a central canopy mounting as the standard option. If side canopy mounting is desired, it must be modified in the field.




Side Canopy Mounting

L4

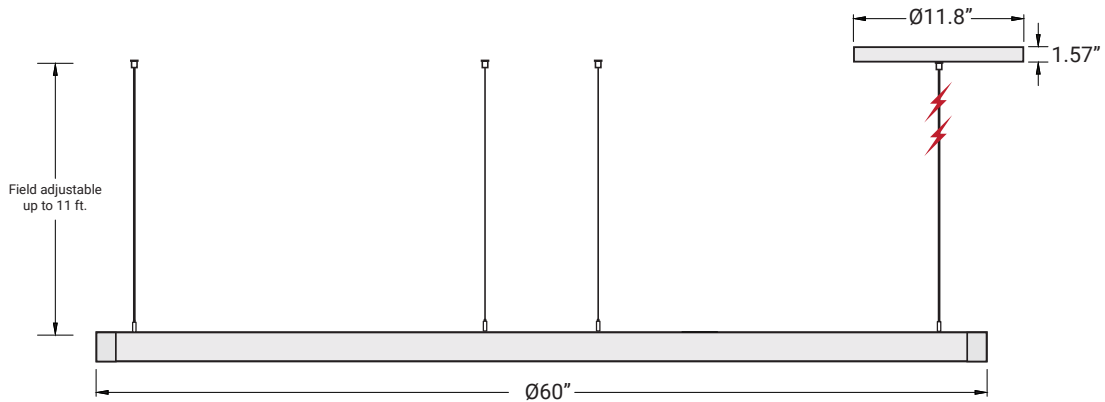

Central Canopy Mounting

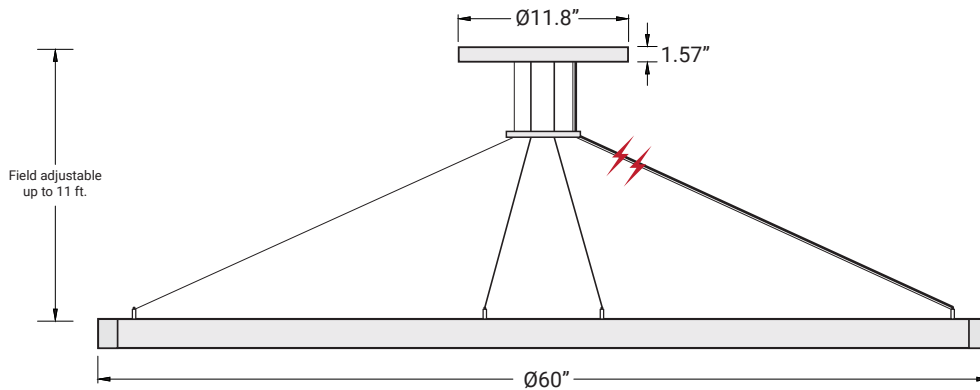

2 Power cables

The drivers and CCT switch are located inside the canopy. The luminaire comes with 4 suspension cables, each 11ft in length, 1 central canopy, 1 wire holder, and 1 side canopy.


Mounting Options

The fixture comes with a central canopy mounting as the standard option. If side canopy mounting is desired, it must be modified in the field.




Side Canopy Mounting

L5

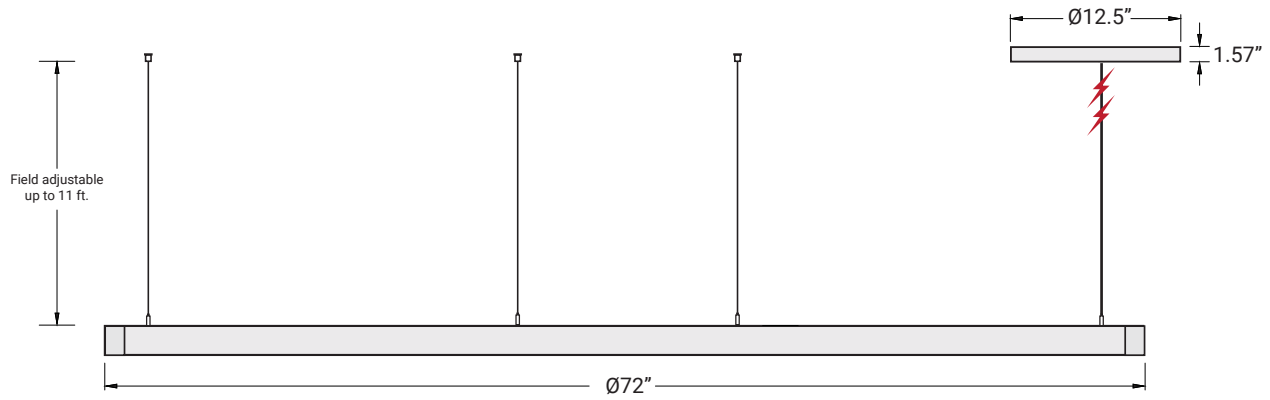

Central Canopy Mounting

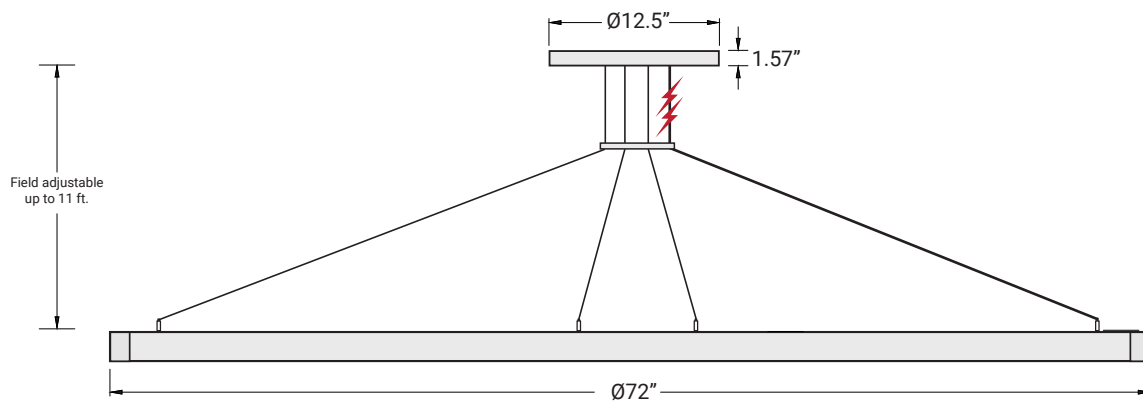

2 Power cables

The drivers and CCT switch are located inside the canopy. The luminaire comes with 4 suspension cables, each 11ft in length, 1 central canopy, 1 wire holder, and 1 side canopy.


Mounting Options



Side Canopy Mounting

The fixture size is available only with a 2-side canopy mounting option and 4 power cables.
The profile is constructed from 4 pieces, instead of a single continuous piece.
The diffuser lens comes in 4 pieces instead of a single-piece diffuser.

L6

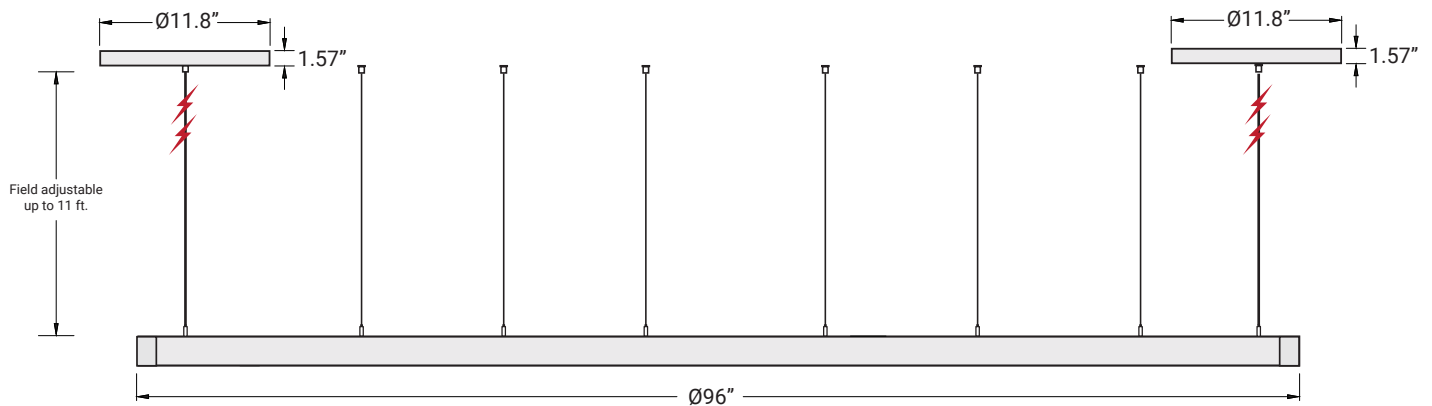


4 Power cables

The drivers and CCT switch are located inside the canopies. The luminaire comes with 8 suspension cables, each 11ft in length, 4 power cables, and 2 side canopies.

Side Canopy Mounting

The fixture size is available only with a 3-side canopy mounting option and 6 power cables.
The profile is constructed from 6 pieces, instead of a single continuous piece.
The diffuser lens comes in 6 pieces instead of a single-piece diffuser.

L7

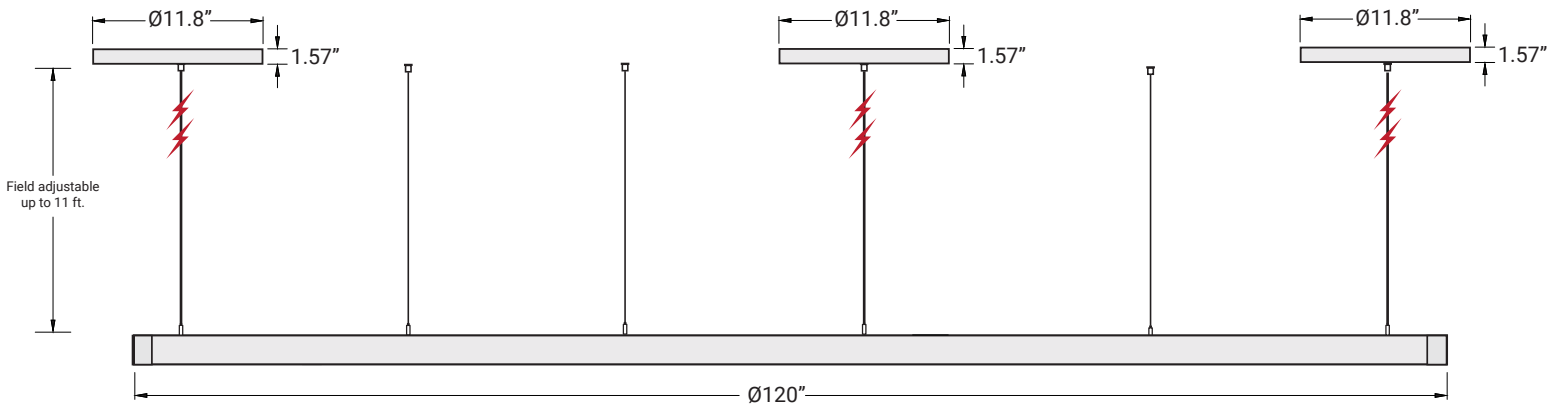



6 Power cables


The drivers and CCT switch are located inside the canopies. The luminaire comes with 6 suspension cables, each 11ft in length, 6 power cables, and 3 side canopies.

Top View


All Dimensions in Millimeters (mm)

 Suspension Cable  Power Cable

L1

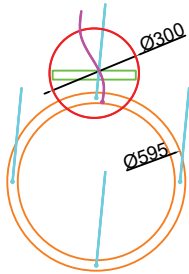


Side Canopy

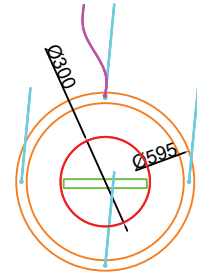


Central Canopy

L2

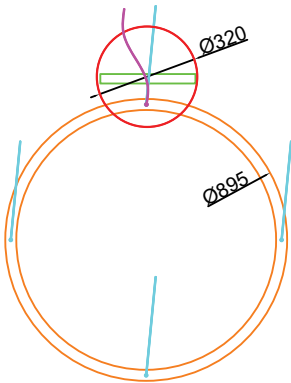


Side Canopy

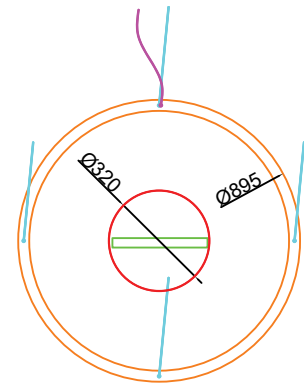


Central Canopy

L3

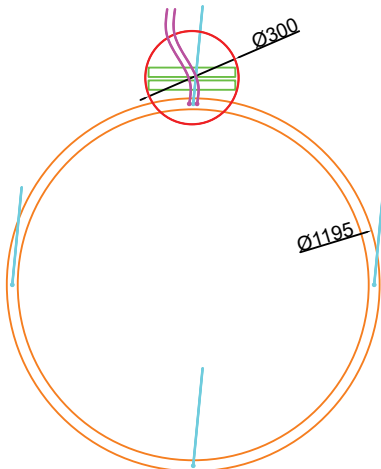

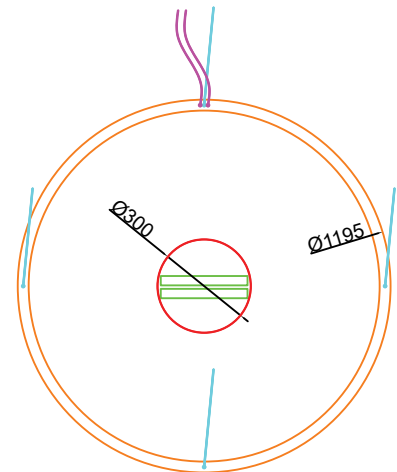

Side Canopy





Central Canopy

Top View

All Dimensions in Millimeters (mm)



 Suspension Cable  Power Cable

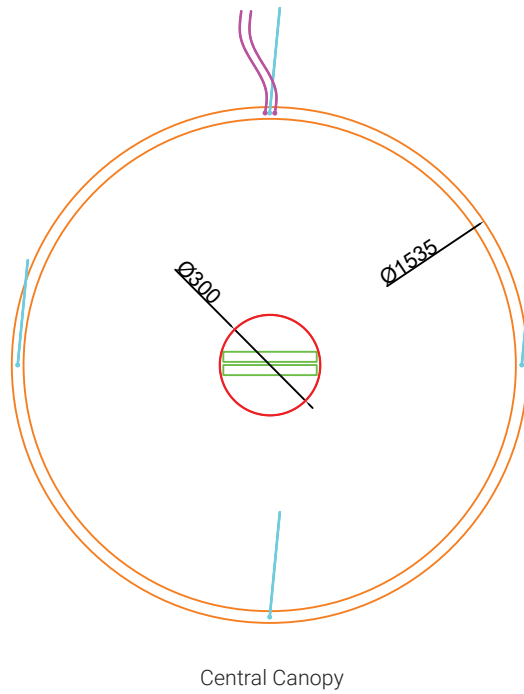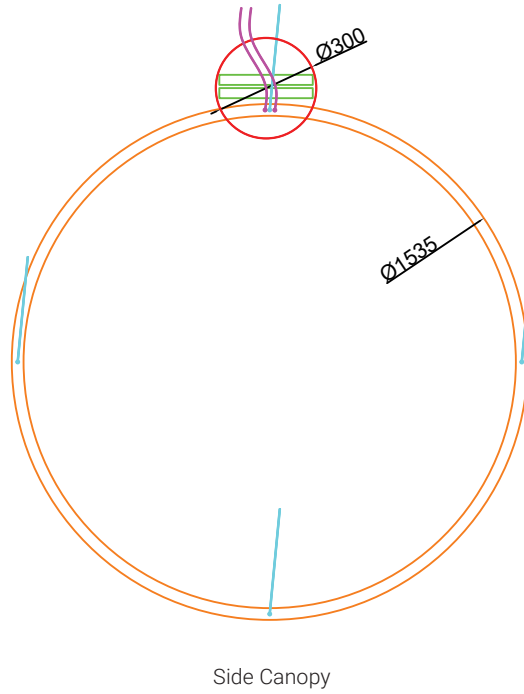L4




Top View


All Dimensions in Millimeters (mm)

 Suspension Cable  Power Cable

L5

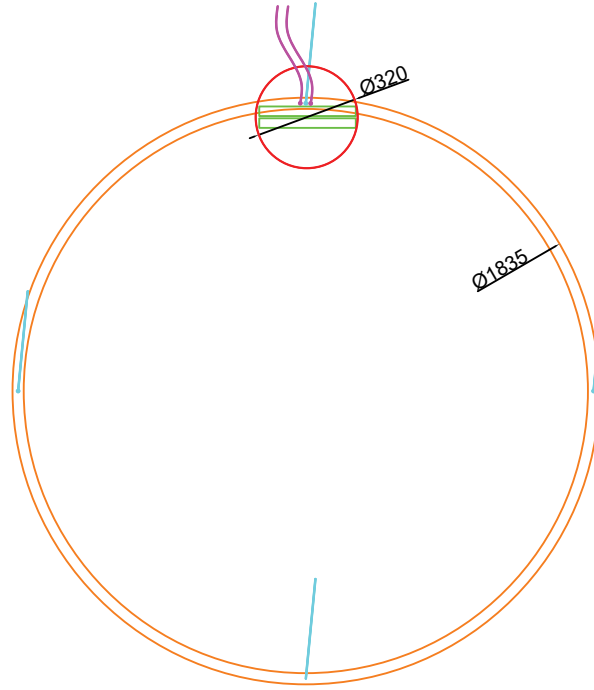

Side Canopy

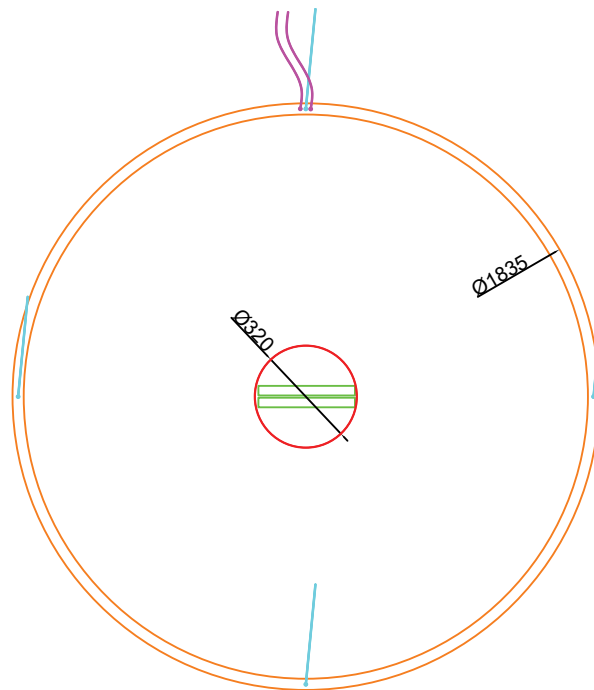


Central Canopy

Top View

All Dimensions in Millimeters (mm)


Suspension Cable Power Cable

L6

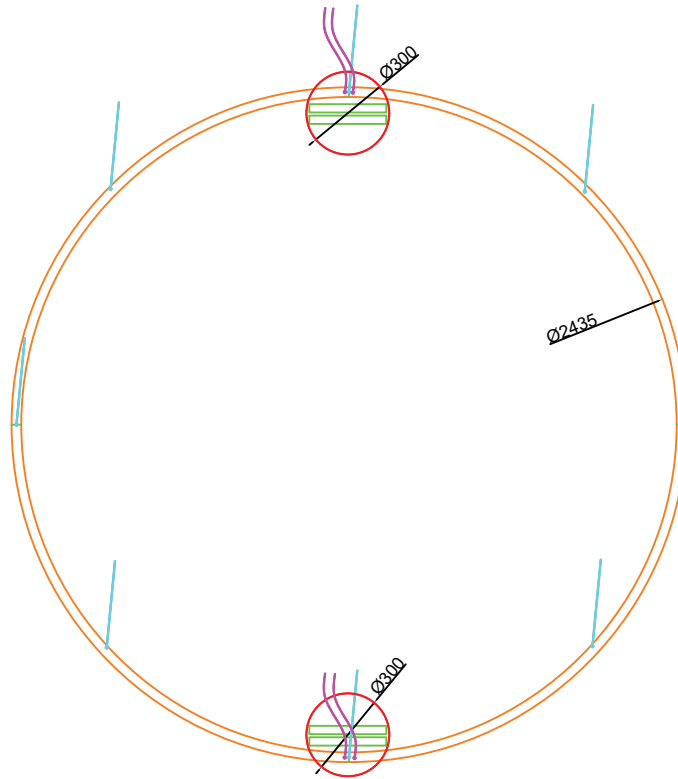

Side Canopy

L7

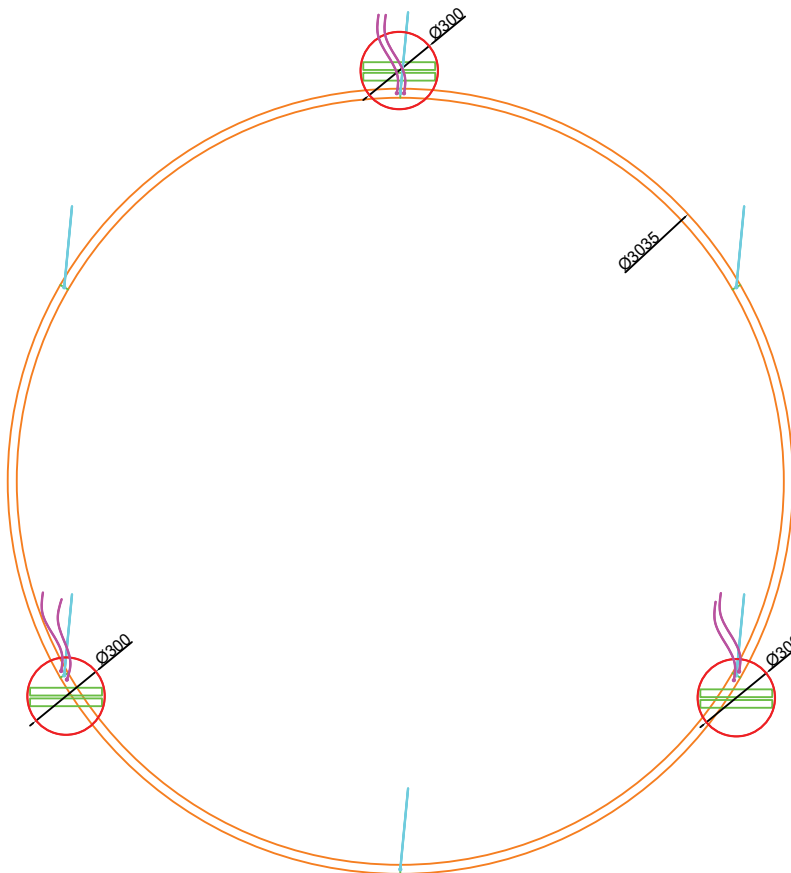

Central Canopy